



REV.	ECN NO.	REVISED	DATE

1.MATERIAL:

- a.HOUSING:PPS UL94V-0
- b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING:AU1u")

SEE ORDERING INFORMATION

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
- d.OPERATING TEMPERATURE: -25°C~ +85°C

ORDERING INFORMATION

F-12-B***003

電池盒系列

F-12系列






SMT 180° TYPE

PLATING:

A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"

MATERIAL:

1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

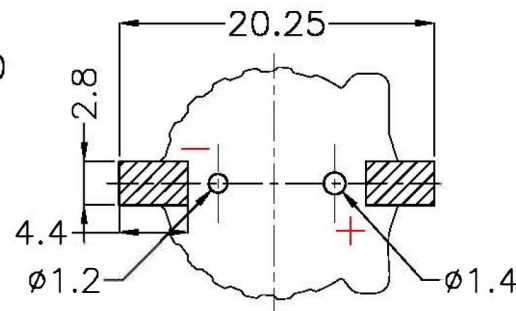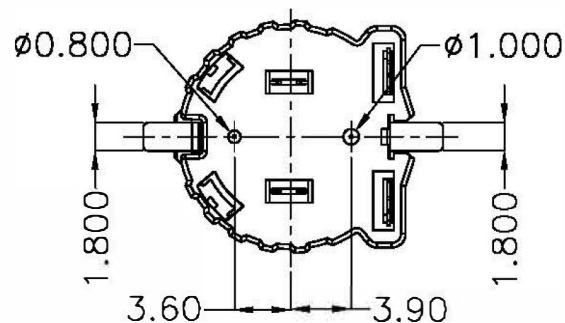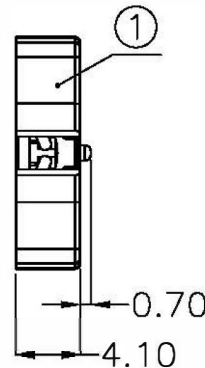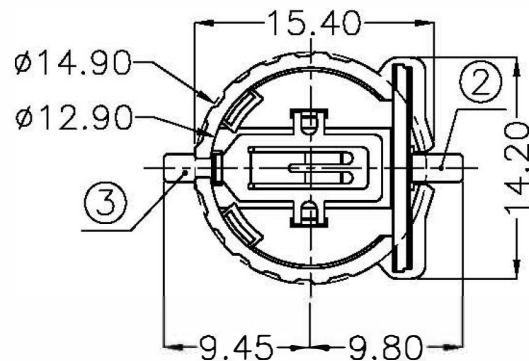

PCB Layout Diagram
Top View

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPS	BROWN

UNLESS OTHERWISE SPECIFIED TOLERANCES		FLYING 汎翊國際有限公司 INTERNATIONAL					
DECIMALS: ANGLES:		DSND	YangFeng	DATE	2017-06-28	TITLE:	
X :±0.30 X :±1°		CHKD	ZhouRuicai	DATE	2017-06-28	F-1220-2 PPS SMT	
X.X :±0.25 X.X :±0.5°		APVD	XueShunyang	DATE	2017-06-28	PART NO.:	
X.XX :±0.20						F-12-B3AA003	
X.XXX :±0.10							
WEIGHT: 0.63g		SCALE: 2:1	SIZE: A4	VIEW: 			
SHEET 1 OF 1		UNIT: mm	REV.: A/0	OBJECT: MY	DRAW NO.:MY-CP-0030		