

4





3

2

1

REVISION DATA

REV	DESCRIPTION	DATE
A0	NEW DRAWING	2008-04-06

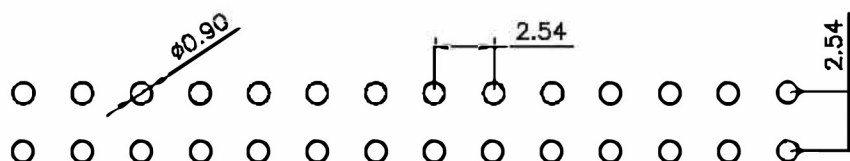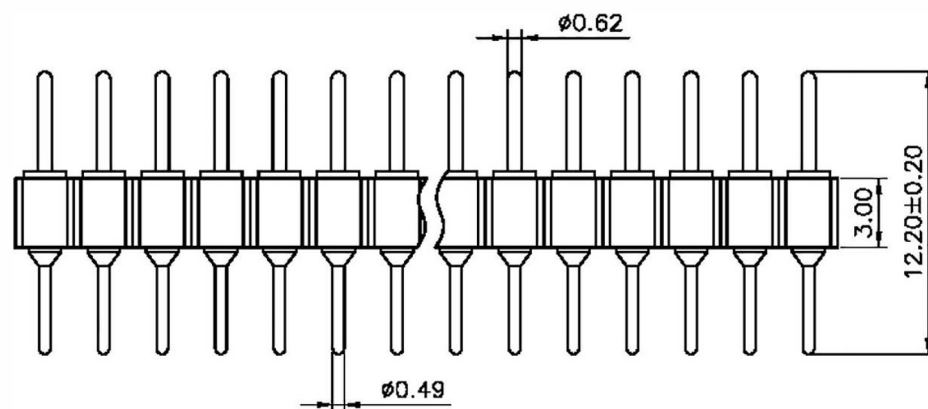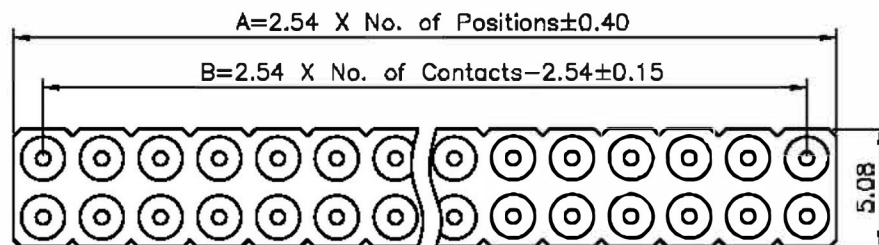

P.C.B LAYOUT

Technical Data

Material:

Pin(outer sleeve): Brass, machined CuZn38Pb2

Plating(outer sleeve):

Tin plated: 2µm/80µ"Ni, 5µm/200µ"Sn

Gold Plated: 2µm/80µ"nickelfull gold

Plating(contact): 2µm/80µ"nickel, gold or Tin plated

Insulator black(housing): PPS (UL94V-0)

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: ≤ 4mΩ/contact

Insulation resistance: ≥ 1000MΩ at V=100V

Operating voltage: 60VAC/DC

Mechanical:

Mechanical life cycle: min.200

Operating temperatures: Gold Plated: -55°C to +105°C

Tin plated: -40°C to +105°C

Soldering temperature: +260°C, 10s max

FLYING 汎翊國際有限公司
INTERNATIONAL

TOLERANCE	PROJECTON		TITLE:
ANGLE ±5°	DATE :	2008-04-06	2.54mmPitch SIP Sockets Straight Double Row Pin Length 12.20mm
X.OOX ±0.10	DRAWN :	Fuqianshan	PART NO: SADXX242X01220A
X.XX ±0.15	CHECKED :		DRAWING NO: SADXX242X01220A
X.X ±0.20	APPROVED :		REV: A0 UNIT: mm SCALE: 3:1 SIZE: A4
X ±0.30			

4

3

2

1