

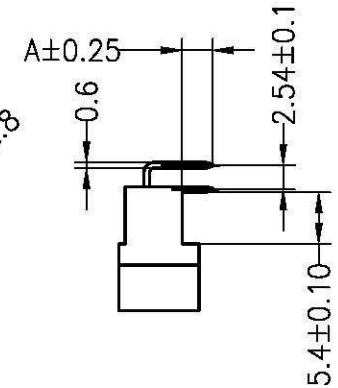


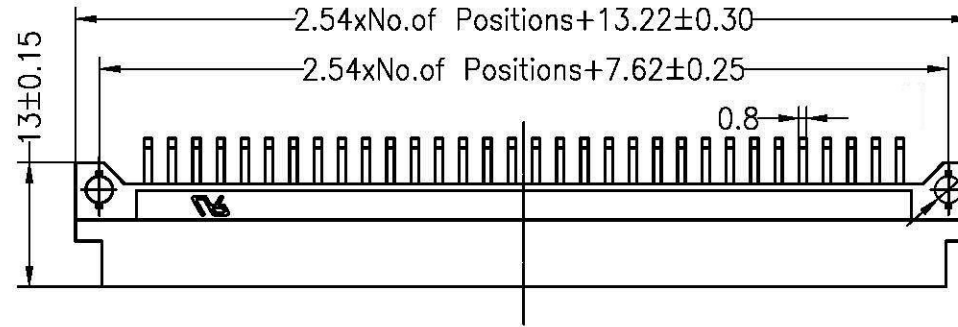

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 5 seconds)

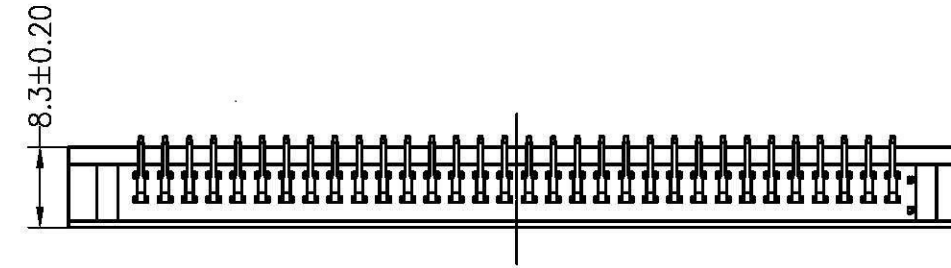

3511232BMRS0BNA1 for HBM32abR-公座 90度彎脚 2x16P


Ordering Information

3511 2 32 B M R XX BNA1

No.of Pins
16,20,32,
48,64P

Contact Type
M=male

Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin
S1:2U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin
S5:30U" Gold/Tin
SN:Tin

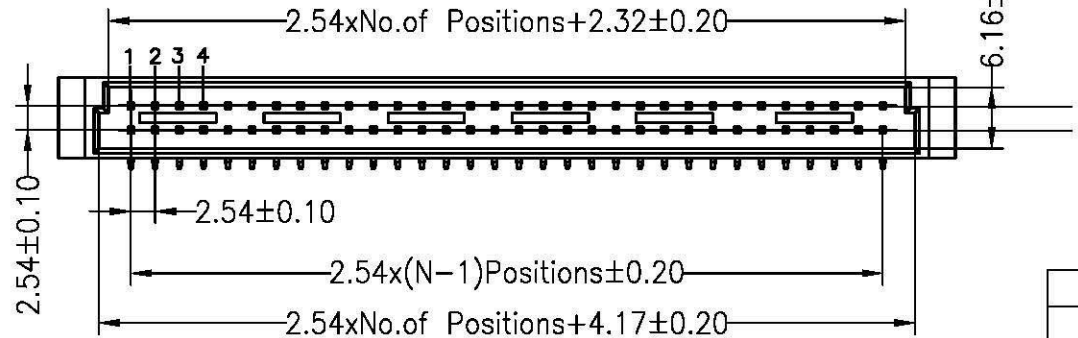

Dimension antitheses list		
ITEM	A	
Standard	2.90	3.20
Alternate		

				OPERATION		DRAW		SCALE		FIT				
				X.X	±0.30			UNIT	mm					
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.				3511232BMRXXBNA1
A0				NEW DRAWING				SHEET	1/1	TITLE:				DIN 41612 90° NPIN Male
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE		PROJ.						