




## 2A LOW DROPOUT LINEAR REGULATOR

### ■ DESCRIPTION

The UTC **LR3965A** belonged to low-noise, low-dropout, linear regulators operate from 2.25V to 6V input and are guaranteed to deliver 2A. Wide range of preset output voltage options are available. Built-in low on-resistance transistor provides low dropout voltage and large output current. The UTC **LR3965A** is designed and optimized for battery-powered systems to work with low noise.

The UTC **LR3965A** consumes less than 0.01 $\mu$ A in shutdown mode. Other features include ultra low dropout voltage, current limiting protection, thermal shutdown protection and high ripple rejection ratio.



HSOP-8

### ■ FEATURES

- \* 2A Guaranteed Output Current
- \* 0.01 $\mu$ A Shutdown Current
- \* 40mV Dropout at 150mA Load
- \* Low Temperature Coefficient
- \* Current Limiting Protection
- \* Thermal Shutdown Protection
- \* Excellent Line/Load Transient

### ■ ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
LR3965AL-xx-SH2-R	LR3965AG-xx-SH2-R	HSOP-8	Tape Reel


Note: xx: Output Voltage, refer to Marking Information.

LR3965AG-xx-SH2-R	(1)Packing Type (2)Package Type (3)Output Voltage Code (4)Green Package	(1) R: Tape Reel (2) SH2: HSOP-8 (3) xx: Refer to Marking Information (4) G: Halogen Free and Lead Free, L: Lead Free
-------------------	--	--

## MARKING INFORMATION

PACKAGE	VOLTAGE CODE	MARKING
HSOP-8	AD :ADJ	

## PIN CONFIGURATION

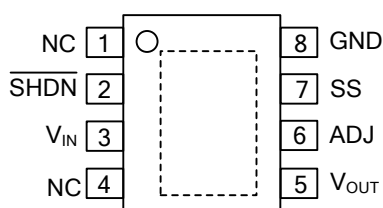

## PIN DESCRIPTION

PIN No.	PIN NAME	DESCRIPTION
2	$\overline{\text{SHDN}}$	Active-Low Shutdown Input. A logic low at $\overline{\text{SHDN}}$ reduces supply current to 0.01 $\mu\text{A}$ . In shutdown, the POK output is low. Connect $\overline{\text{SHDN}}$ to $V_{\text{IN}}$ for normal operation.
3	$V_{\text{IN}}$	Power Input Voltage. Supply voltage can range from 2.25V to 6V. Bypass with a 68 $\mu\text{F}$ capacitor to GND.
5	$V_{\text{OUT}}$	Output Voltage
6	ADJ	Voltage-adjust Input. Connect ADJ to GND for preset output. Connect an external resistive voltage-divider from $V_{\text{OUT}}$ to ADJ to set the output voltage between 0.8V and 6V. The ADJ regulation voltage is 800mV
7	SS	Soft start time setting. For adjustable soft start time version, connect a capacitor from SS to gnd to set the soft start time.
8	GND	Ground



■ ABSOLUTE MAXIMUM RATING ( $T_A=25^{\circ}\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V_{IN}$	6.5	V
Power Dissipation	$P_D$	606	mW
Junction Temperature	$T_J$	+125	$^{\circ}\text{C}$
Operating Temperature	$T_{OPR}$	-40 ~ +85	$^{\circ}\text{C}$
Storage Temperature	$T_{STG}$	-65 ~ +150	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL RESISTANCES CHARACTERISTICS

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	$\theta_{JA}$	165	$^{\circ}\text{C}/\text{W}$

■ ELECTRICAL CHARACTERISTICS

( $T_A = 25^{\circ}\text{C}$ ,  $V_{IN} = V_{OUT} + 1\text{V}$  or  $V_{IN} = 2.25\text{V}$  whichever is greater,  $C_{IN} = 68\mu\text{F}$ ,  $C_{OUT} = 33\mu\text{F}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage	$V_{IN}$		Note1		6	V
Output Voltage Accuracy (Preset Mode)	$V_{OUT}$	$T_A = 25^{\circ}\text{C}$ , $I_{OUT} = 1\text{mA} \sim 2\text{A}$	-2		2	%
Maximum Output Current	$I_{OUT}$			2.0		A
Short-Circuit Current Limit	$I_{LIMIT}$	$V_{OUT} = 0\text{V}$		2.5		A
Ground Pin Current	$I_{GND}$	$I_{OUT} = 0\text{mA}$		200		$\mu\text{A}$
Dropout Voltage (Note 2)	$V_D$	$I_{OUT} = 2.0\text{A}$			650	mV
Line Regulation (Note 3)	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$V_{IN} = V_{OUT} + V_D \sim 6\text{V}$		0.08	0.55	%/V
Load Regulation (Note 3, 4)	$\Delta V_{OUT}$	$V_{IN} = V_{OUT} + 1\text{V}$ , $V_{OUT} = 2.5\text{V}$ , $I_{OUT} = 10\text{mA} \sim 2.0\text{A}$		0.25	0.8	%
Output Voltage Noise	$e_N$	$f = 10\text{Hz}$ to $1\text{MHz}$ , $C_{OUT} = 33\mu\text{F}$		300		$\mu\text{V}_{RMS}$
Power Supply Rejection Ratio	PSRR	$F = 1\text{KHz}$		45		dB
Shutdown Supply Current	$I_{OFF}$	$\overline{\text{SHDN}} = \text{GND}$		0.01	5	$\mu\text{A}$
Shutdown Threshold	$V_{IH}$		1.7			V
	$V_{IL}$				0.6	V
Thermal Shutdown Temperature	$T_{SHDN}$			170		$^{\circ}\text{C}$
Thermal Shutdown Hysteresis	$DT_{SHDN}$			20		$^{\circ}\text{C}$
ADJ Voltage	$V_{REF}$	Measured on ADJ, $I_{OUT} = 10\text{mA}$	0.774	0.8	0.826	V
ADJ Mode Threshold				80		mV
Adjustable Output Voltage			0.8		5	V


Notes: 1. The minimum operating value for  $V_{IN}$  is equal to either  $[V_{OUT(NOM)} + V_D]$  or  $2.5\text{V}$ , whichever is greater.

2. Dropout voltage is defined as the voltage from the input to output when output is 2% below the nominal value. Dropout voltage specification applies only to output voltage of  $2.5\text{V}$  and above.

3. Output voltage line regulation is defined as the change in output voltage from the nominal value resulting from a change in the input line voltage. Output voltage load regulation is defined as the change in output voltage from the nominal value as the load current increases from no load to full load.

4. Regulation is measured at constant junction temperature by using a 10ms current pulse.

■ TYPICAL APPLICATION CIRCUIT

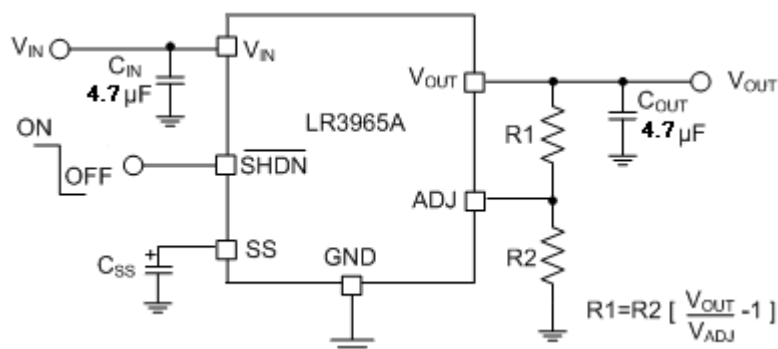

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.