

TL084

LINEAR INTEGRATED CIRCUIT

LOW NOISE QUAD J-FET
OPERATIONAL AMPLIFIER

■ DESCRIPTION


The UTC **TL084** is a high speed J-FET input quad operational amplifier. It incorporates well matched, high voltage J-FET and bipolar transistors on a monolithic integrated circuit. The device features high slew rates, low input bias and offset current, and low offset voltage temperature coefficient.

■ FEATURES



- *Low Power Consumption
- *Wide Common-Mode (Up To V_{cc+}) and Differential Voltage Range
- *Low Input Bias and Offset Current
- *Low Noise $eN = 15 \text{ nV}/\sqrt{\text{Hz}}$ (typ.)
- *Output Short-Circuit Protection
- *High Input Impedance J-FET Input Stage
- *Low Harmonic Distortion: 0.01% (typ.)
- *Internal Frequency Compensation
- *Latch up Free Operation

■ ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
TL084L-D14-T	TL084G-D14-T	DIP-14	Tube
TL084L-P14-R	TL084G-P14-R	TSSOP-14	Tape Reel
TL084L-S14-R	TL084G-S14-R	SOP-14	Tape Reel

 TL084G-D14-T	(1)Packing Type (2)Package Type (3)Green Package	(1) T: Tube, R: Tape Reel (2) D14: DIP-14, S14: SOP-14, P14: TSSOP-14 (3) G: Halogen Free and Lead Free, L: Lead Free
---	--	---


■ MARKING

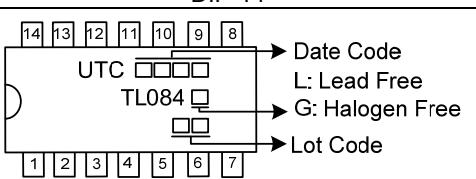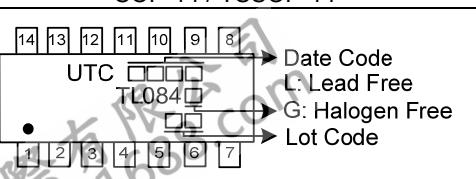DIP-14	SOP-14 / TSSOP-14
 UTC  TL084  Date Code L: Lead Free G: Halogen Free Lot Code	 UTC  TL084  Date Code L: Lead Free G: Halogen Free Lot Code

■ PIN CONFIGURATIONS

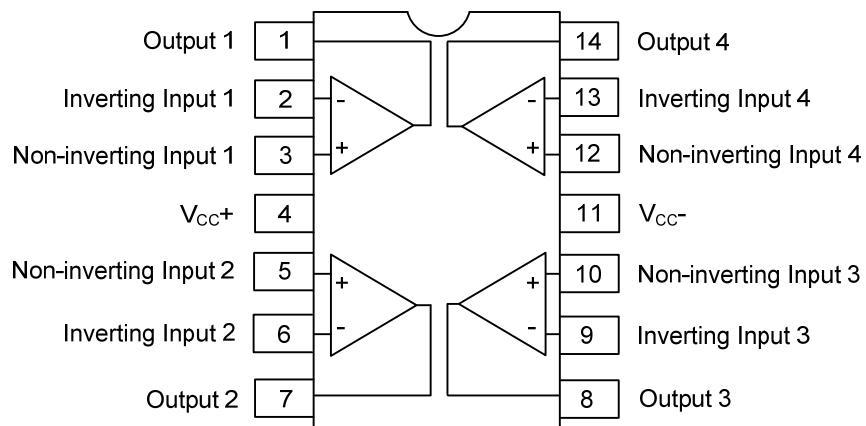

■ SCHEMATIC DIAGRAM

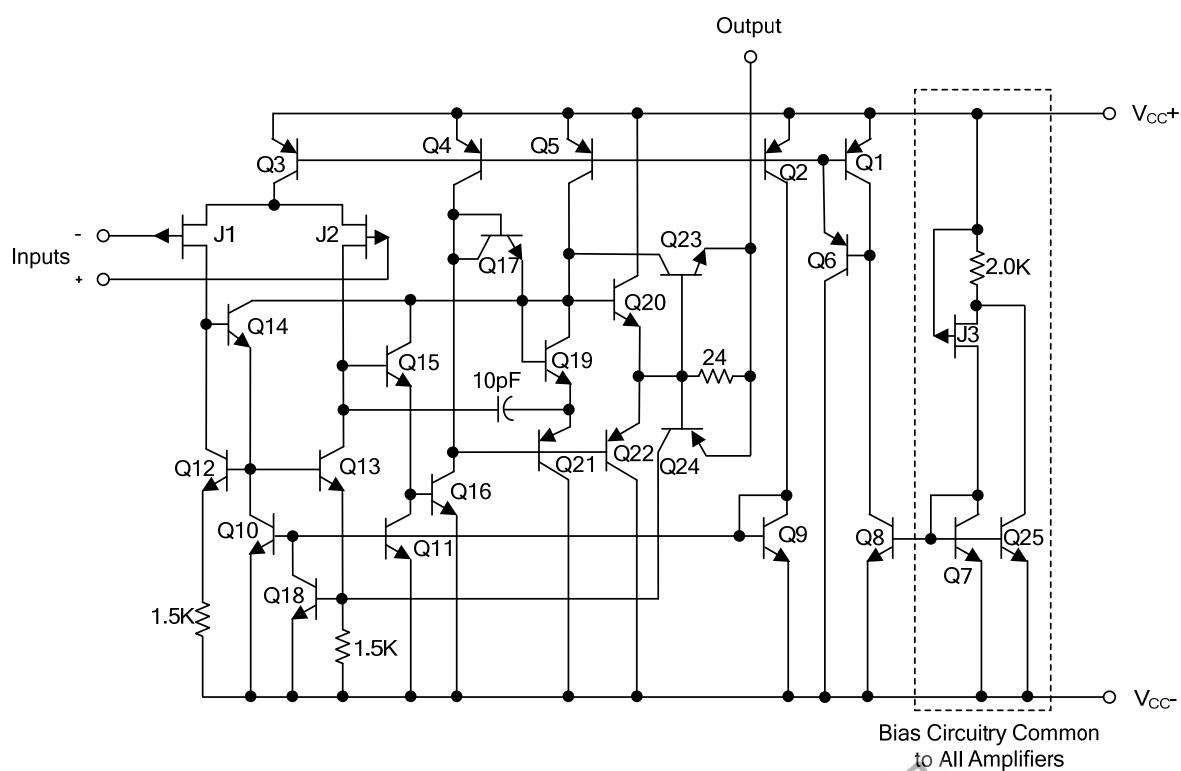

■ ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage (Note 2)	V_{CC}	± 18	V
Input Voltage (Note 3)	V_{IN}	± 15	V
Differential Input Voltage (Note 4)	$V_{I(DIFF)}$	± 30	V
Power Dissipation	P_D	680	mW
Output Short-Circuit Duration (Note 5)		Infinite	
Operating Temperature	T_{OPR}	0 ~ +70	$^\circ\text{C}$
Storage Temperature	T_{STG}	-65 ~ +150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.


2. All voltage values, except differential voltage, are with respect to the zero reference level (ground) of the supply voltages where the zero reference level is the midpoint between V_{CC^-} and V_{CC^+} .
3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 volts, whichever is less.
4. Differential voltages are at the non-inverting input terminal with respect to the inverting input terminal.
5. The output may be shorted to ground or to either supply. Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.

■ ELECTRICAL CHARACTERISTICS ($V_{CC}=\pm 15\text{V}$, $T_a=25^\circ\text{C}$, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Offset Voltage	$V_{I(OFF)}$	$R_S \leq 10\text{k}\Omega$, $V_{CM}=0\text{V}$		5	15	μV
Temperature Coefficient of Input Offset Voltage	$\Delta V_{I(OFF)}$	$R_S=50\Omega$		10		$\mu\text{V}/^\circ\text{C}$
Input Offset Current (Note)	$I_{I(OFF)}$	$V_{CM}=0\text{V}$		5	200	pA
Input Bias Current (Note1)	$I_{I(BIAS)}$	$V_{CM}=0\text{V}$		30	400	pA
Input Common Mode Voltage	$V_{I(CM)}$		± 10	-12~+15		V
Output Voltage Swing	$V_{O(SW)}$	$R_L=10\text{k}\Omega$	24	28		V
Large Signal Voltage Gain	G_V	$R_L \geq 2\text{k}\Omega$, $V_{OUT}=\pm 10\text{V}$	25	150		V/mV
Gain Bandwidth Product	GB_W			1		MHz
Input Resistance	R_{IN}			10^{12}		Ω
Common Mode Rejection Ratio	CMR	$R_S \leq 10\text{k}\Omega$	70	100		dB
Supply Voltage Rejection Ratio	SVR	$R_S \leq 10\text{k}\Omega$	70	100		dB
Supply Current	I_{CC}	No Load		1.4	2.8	mA
Channel Separation	V_{01}/V_{02}	$G_V=100$		120		dB
Slew Rate	SR	$V_{IN}=10\text{V}$, $R_L=2\text{k}\Omega$, $C_L=100\text{pF}$, unity gain	2.0			$\text{V}/\mu\text{s}$
Rise Time	t_R			0.1		μs
Overshoot Factor	K_{OV}	$V_{IN}=20\text{mV}$, $R_L=2\text{k}\Omega$, $C_L=100\text{pF}$, unity gain		10		%
Equivalent Input Noise Voltage	e_N	$R_S=100\Omega$, $f=1\text{kHz}$		25		$\text{nV}/\sqrt{\text{Hz}}$

Note: The Input bias currents are junction leakage currents, which approximately double for every 10°C increase in the junction temperature.

■ PARAMETER MEASUREMENT INFORMATION





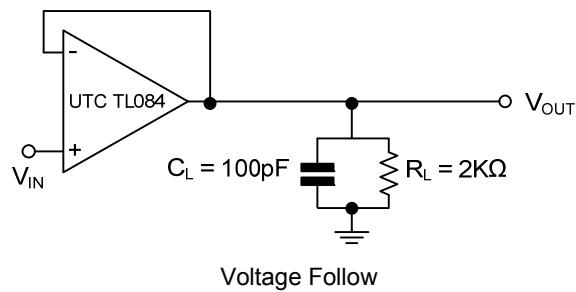


Voltage Follow

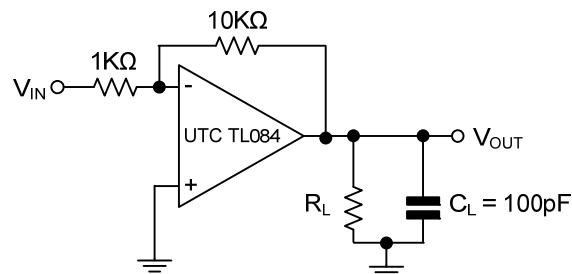

Gain-of-10 Inverting Amplifier

■ TYPICAL CHARACTERISTICS

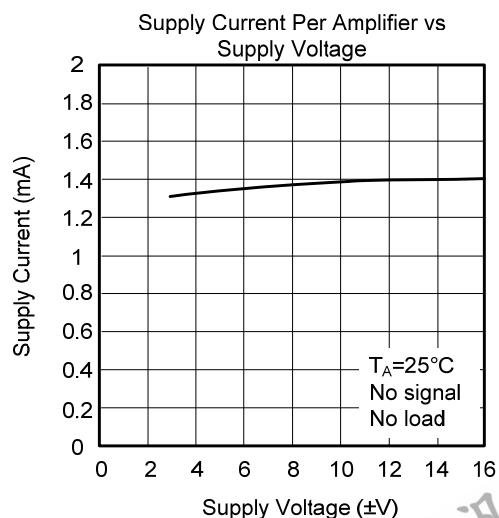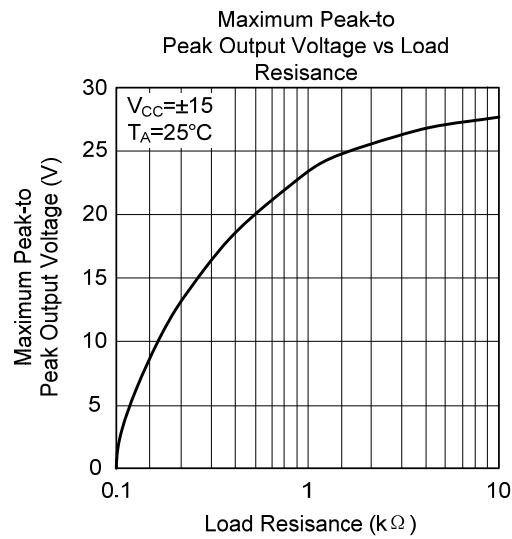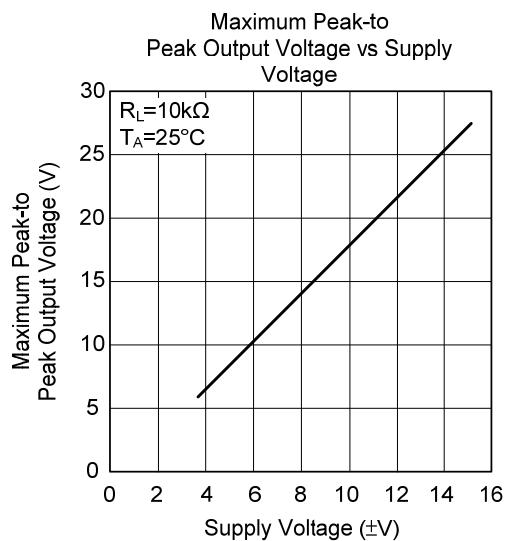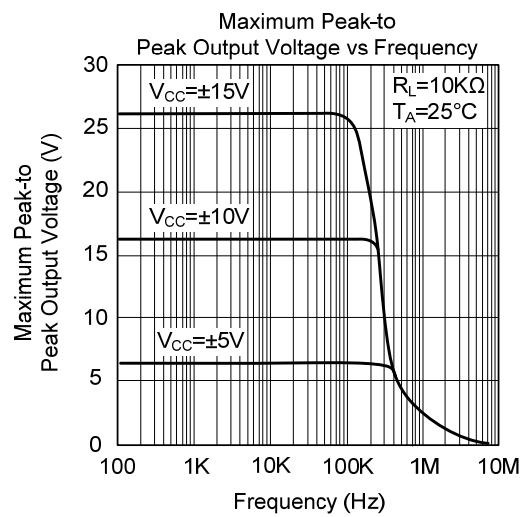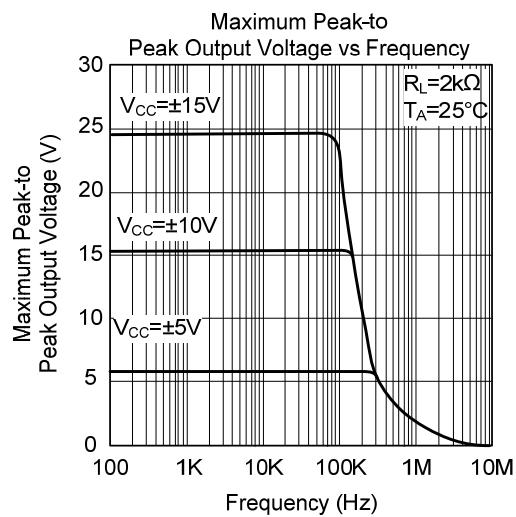

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.