

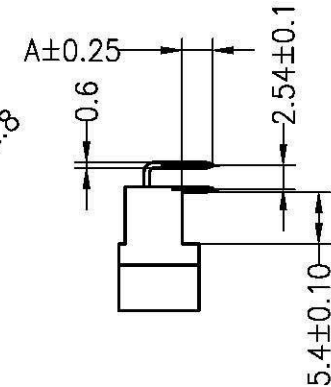


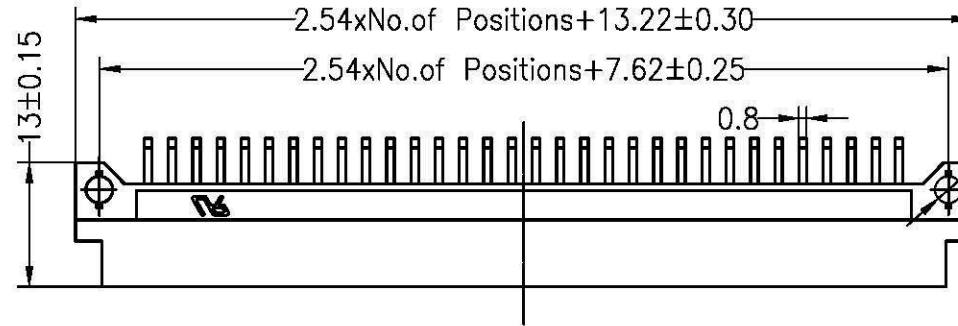

**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PBT  
 Max.Processing Temp: 180°C for 30-60 seconds  
 (200°C for 5 seconds)

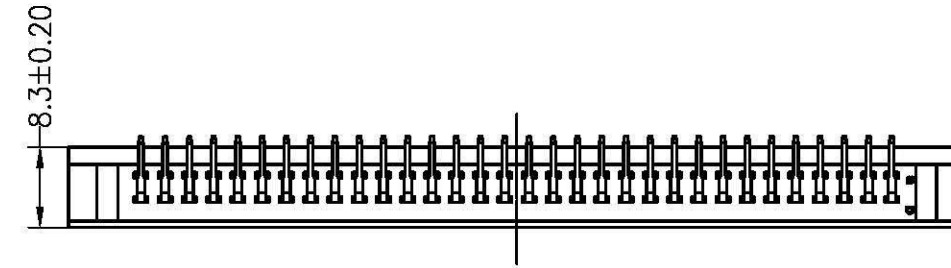

3511264BMRS0BNA1 for BM64abR-2 公座 90度彎脚 2x32P


**Ordering Information**

3511 2 64 B M R XX BNA1

No.of Pins  
16,20,32,  
48,64P

Contact Type  
M=male

Contact Plating  
 G0:Gold Flash  
 S0:Gold Flash/Tin  
 S1:2U" Gold/Tin  
 S2:5U" Gold/Tin  
 S3:10U" Gold/Tin  
 S4:15U" Gold/Tin  
 S5:30U" Gold/Tin  
 SN:Tin

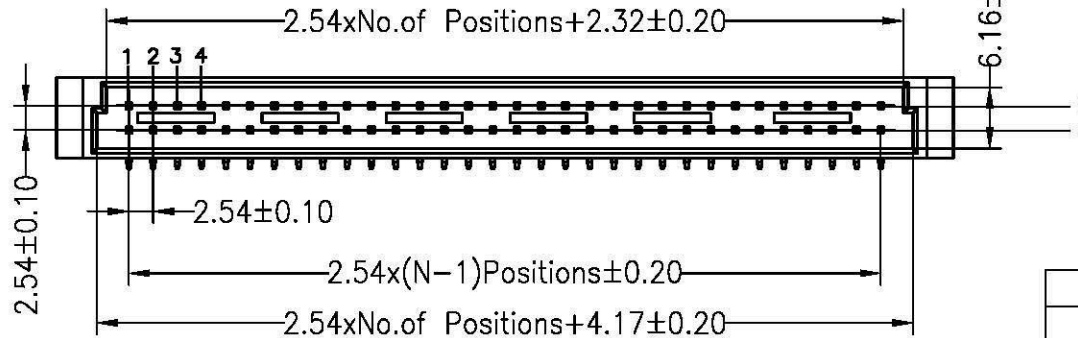

Dimension antitheses list		
ITEM	A	
Standard	2.90	3.20
Alternate		

				OPERATION		DRAW		SCALE		FIT				
				X.X	±0.30			UNIT	mm					
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.				3511264BMRXXBNA1
A0				NEW DRAWING				SHEET	1/1	TITLE:				DIN 41612 90° NPIN Male
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	DIM	TOL	APPROVE	PROJ.						