

TL431

LINEAR INTEGRATED CIRCUIT


PROGRAMMABLE PRECISION REFERENCE

DESCRIPTION

The UTC **TL431** is a three-terminal adjustable regulator with a guaranteed thermal stability over applicable temperature ranges. The output voltage may be set to any value between V_{REF} (approximately 2.5V) and 36V with two external resistors. It provides very wide applications, including shunt regulator, series regulator, switching regulator, voltage reference and others.

FEATURES

- * Programmable output Voltage to 36V.
- * Low dynamic output impedance 0.2Ω.
- * Sink current capability of 1.0 to 100mA.
- * Equivalent full-range temperature coefficient of 50ppm/°C typical for operation over full rated operating temperature range.

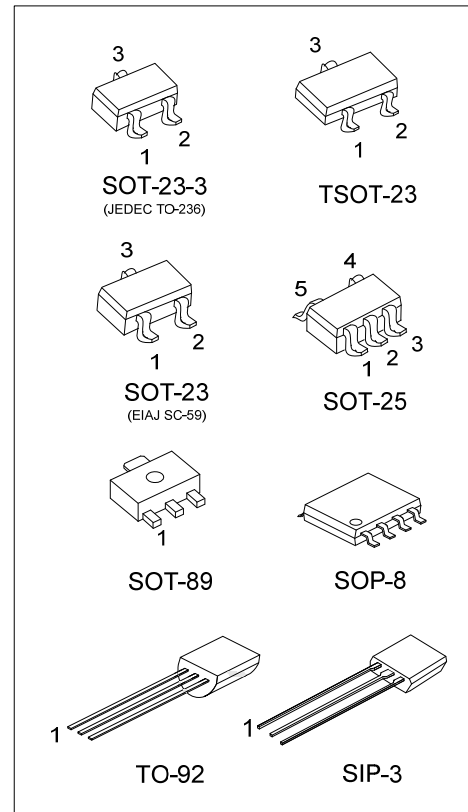









ORDERING INFORMATION

Ordering Number		Package	Pin Assignment								Packing
Lead Free	Halogen Free		1	2	3	4	5	6	7	8	
TL431K-AB3-R	TL431G-AB3-R	SOT-89	R	A	K	-	-	-	-	-	Tape Reel
TL431K-AE2-R	TL431G-AE2-R	SOT-23-3	R	K	A	-	-	-	-	-	Tape Reel
TL431K-AE3-R	TL431G-AE3-R	SOT-23	R	K	A	-	-	-	-	-	Tape Reel
TL431NSL-AE3-R	TL431NSG-AE3-R	SOT-23	K	R	A	-	-	-	-	-	Tape Reel
TL431NSL-AE2-R	TL431NSG-AE2-R	SOT-23-3	K	R	A	-	-	-	-	-	Tape Reel
TL431NSL-AH3-R	TL431NSG-AH3-R	TSOT-23	K	R	A	-	-	-	-	-	Tape Reel
TL431K-AF5-R	TL431G-AF5-R	SOT-25	X	X	K	R	A	-	-	-	Tape Reel
TL431K-AF5-B-R	TL431G-AF5-B-R	SOT-25	X	A	X	K	R	-	-	-	Tape Reel
TL431K-AF5-C-R	TL431G-AF5-C-R	SOT-25	R	A	K	X	X	-	-	-	Tape Reel
TL431K-S08-R	TL431G-S08-R	SOP-8	K	A	A	X	X	A	A	R	Tape Reel
TL431K-K03-K	TL431G-G03-K	SIP-3	R	A	K	-	-	-	-	-	Bulk
TL431K-T92-B	TL431G-T92-B	TO-92	R	A	K	-	-	-	-	-	Tape Box
TL431K-T92-K	TL431G-T92-K	TO-92	R	A	K	-	-	-	-	-	Bulk


Note: Pin Code: K: Cathode A: Anode R: Reference X: No Connection

TL431G-AF5-B-R (1)Packing Type (2)Pin Assignment (3)Package Type (4)Green Package	(1) B: Tape Box, K: Bulk, R: Tape Reel, T: Tube (2) refer to Pin Assignment (3) AB3: SOT-89, AE2: SOT-23-3, AE3: SOT-23, AH3: TSOT-23, AF5: SOT-25, S08: SOP-8, G03: SIP-3, T92: TO-92 (4) G: Halogen Free and Lead Free, K: Lead Free L: Lead Free (For TL431NS)
--	---


MARKING

PACKAGE	MARKING	PACKAGE	MARKING
SOT-23-3 SOT-23 (TL431)	 K: Lead Free G: Halogen Free	SOP-8	 Date Code K: Lead Free G: Halogen Free Lot Code
SOT-23-3 SOT-23 TSOT-23 (TL431NS)	 L: Lead Free G: Halogen Free	SIP-3	 K: Lead Free G: Halogen Free Date Code
SOT-25	 K: Lead Free G: Halogen Free	SOT-25 (Pin B, C)	 Pin Code K: Lead Free G: Halogen Free
SOT-89	 Date Code K: Lead Free G: Halogen Free	TO-92	 K: Lead Free G: Halogen Free Date Code

PIN CONFIGURATION (For SOP-8)

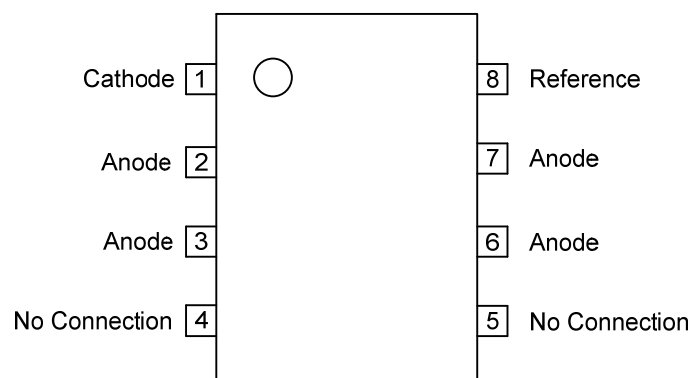

BLOCK DIAGRAM

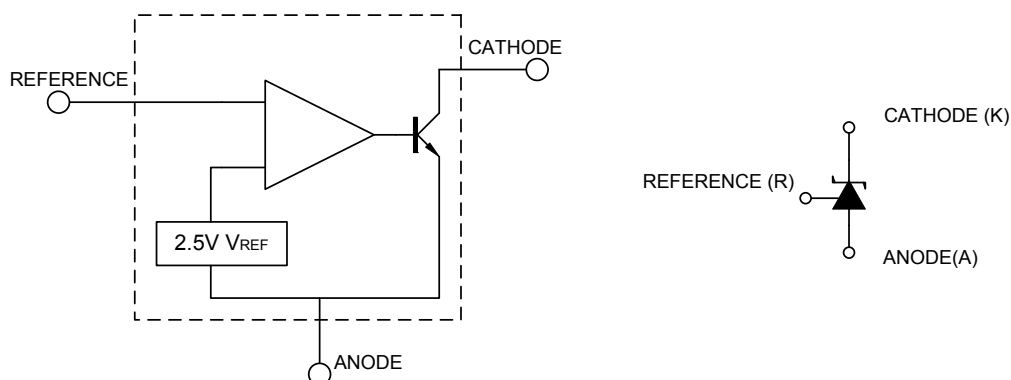

■ ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Cathode Voltage		V _{KA}	37	V
Cathode Current Range(Continuous)		I _{KA}	-100 ~ +150	mA
Reference Input Current Range		I _{REF}	-0.05 ~ +10	mA
Power Dissipation	TO-92	P _D	770	mW
	SOT-89		800	mW
	SOT-23/SOT-23-3 TSOT-23/SOT-25		300	mW
	SIP-3		400	mW
	SOP-8		600	mW
Operating Junction		T _J	+150	°C
Operating Ambient (Note 2)		T _{OPR}	-40 ~ +125	°C
Storage Temperature		T _{STG}	-65 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. It is guarantee by design, not 100% be tested.


■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Cathode Voltage	V_{KA}	V_{REF}		36	V
Cathode Current	I_{KA}	1		100	mA


■ ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Reference Input Voltage	V _{REF}	V _{KA} =V _{REF} , I _{KA} =10mA	TL431-A (±0.5%)	2.483	2.495	2.507	V
			TL431-1 (±1%)	2.470	2.495	2.520	V
			TL431-2 (+2%)	2.520	-	2.545	V
			TL431-3 (-2%)	2.445	-	2.470	V
Deviation of reference Input Voltage Over temperature	$\frac{\Delta V_{REF}}{\Delta T}$	V _{KA} =V _{REF} , I _{KA} =10mA, 0°C ≤ T _A ≤ 70°C			4.5	17	mV
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage	$\frac{\Delta V_{REF}}{\Delta V_{KA}}$	I _{KA} =10mA	ΔV _{KA} =10V~V _{REF}		-1.0	-2.7	mV/V
			ΔV _{KA} =36V~10V		-0.5	-2.0	mV/V
Reference Input Current	I _{REF}	I _{KA} =10mA, R1=10kΩ, R2=∞			1.5	4	μA
Deviation of Reference Input Current Over Full Temperature Range	$\frac{\Delta I_{REF}}{\Delta T}$	I _{KA} =10mA, R1=10kΩ, R2=∞, T _A =full Temperature			0.4	1.2	μA
Minimum Cathode Current for Regulation	I _{KA(MIN)}	V _{KA} =V _{REF}			0.3	0.5	mA
Off-State Cathode Current	I _{KA(OFF)}	V _{KA} =36V, V _{REF} =0			0.05	1.0	μA
Dynamic Impedance	Z _{KA}	V _{KA} =V _{REF} , I _{KA} =1~ 100mA,f≤1.0kHz			0.15	0.5	Ω







■ TEST CIRCUIT

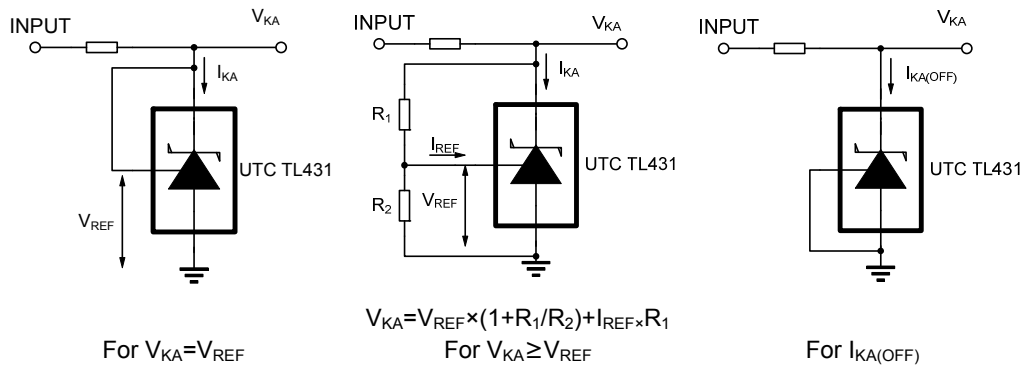

■ APPLICATION CIRCUIT

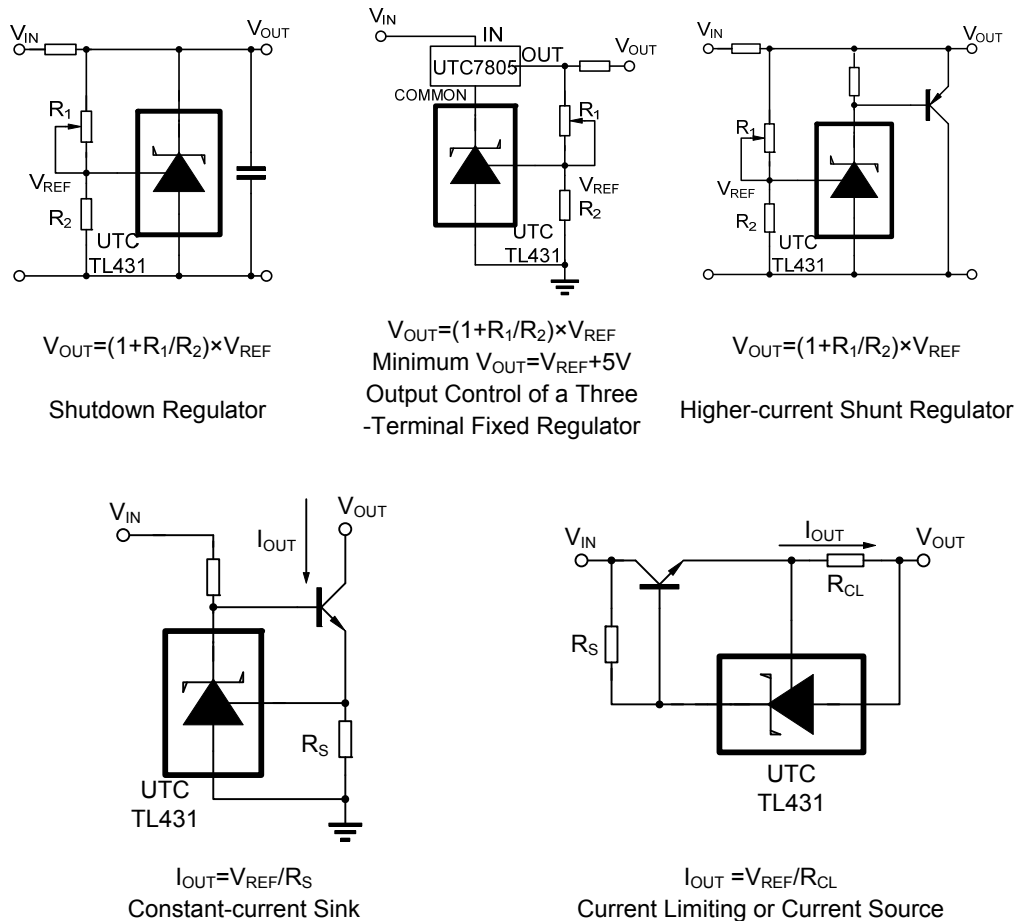

TYPICAL CHARACTERISTICS

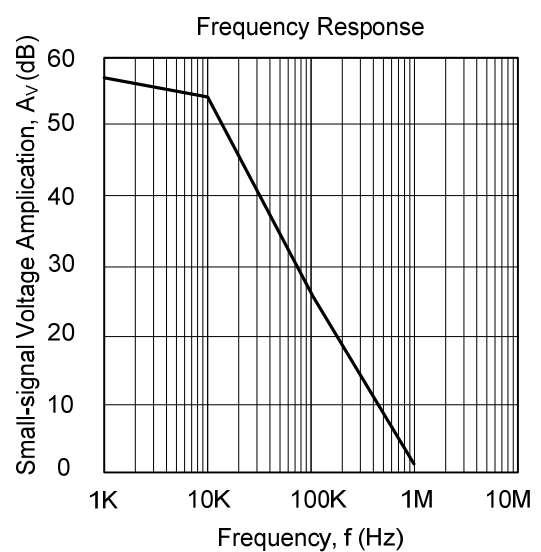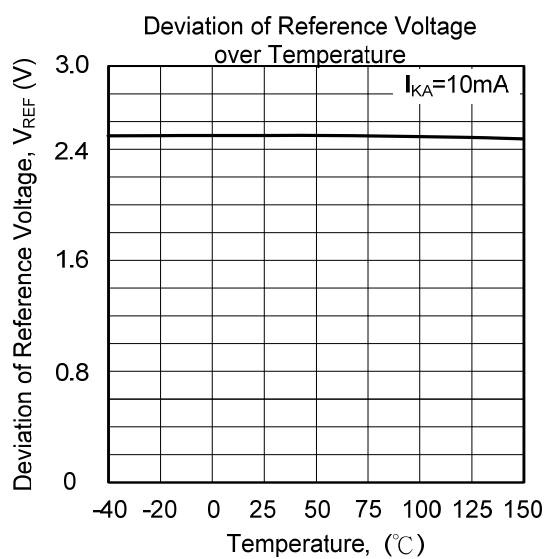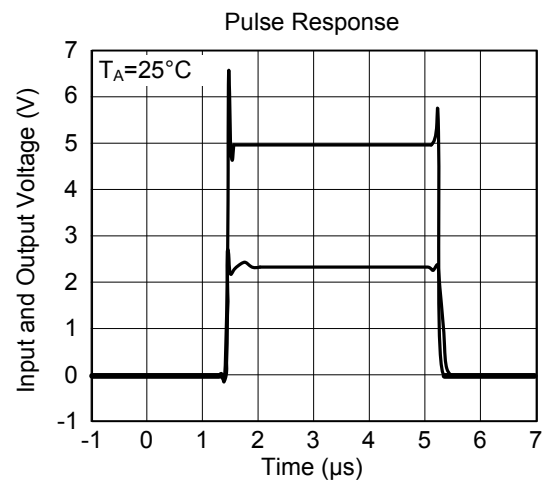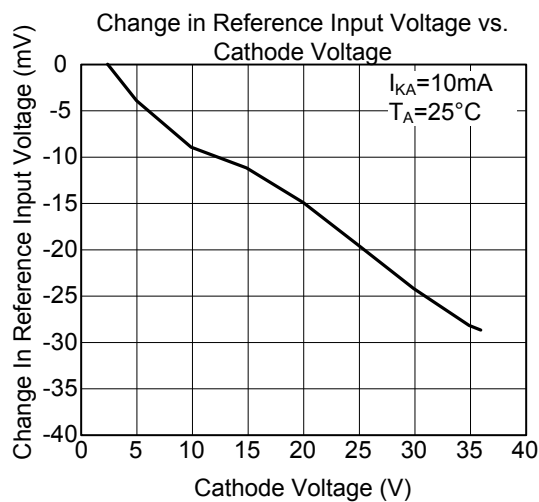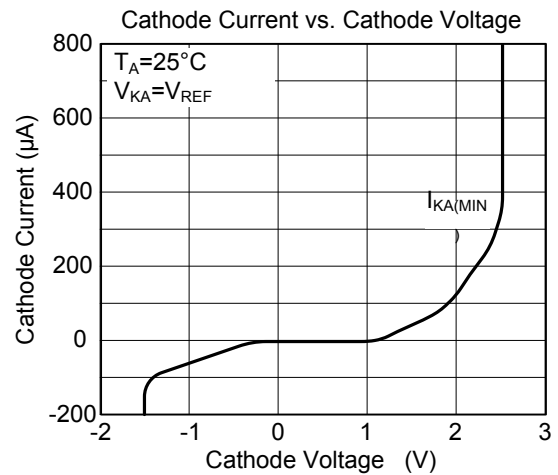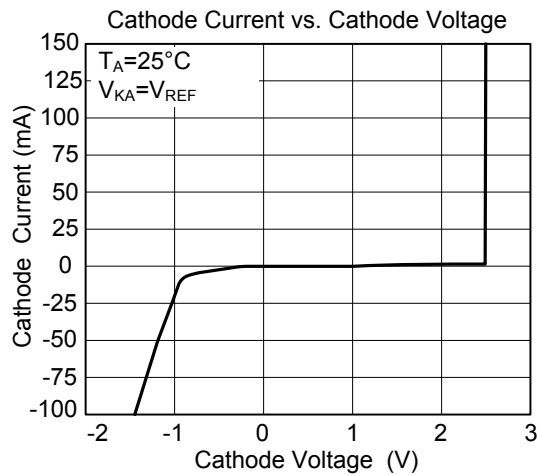

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.