

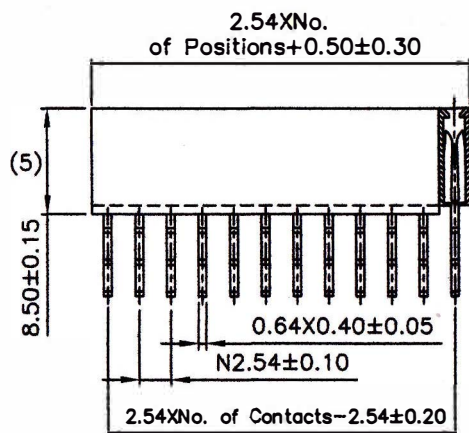



Dual Row

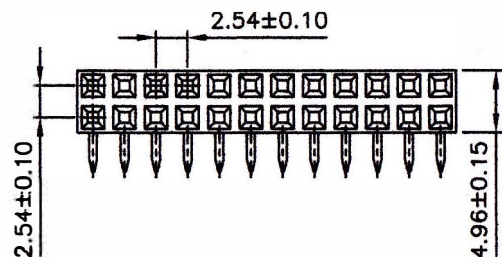

P.C.B. Layout Dual Row

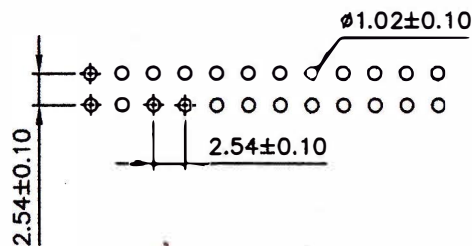

Dual Row



Technical Data

Material:

Insulator Material: PBT+30% Glass
Fiber UL94V0

Contact Material: Brass

Plated: Gold flash or Tin plated

Electrical:

Insulation resistance: 5000MΩ Min
at DC500V

Contact Resistance: 20mΩ Max
at DC100 mA

Current rating: 1A

Operating Temperature:
-55°C to +105°C
260°C/10sec Max

How To Order

FH- (1) x (2) (3) / (4) - (5)

(1) 1: Single row / 2: Double row / 3: Triple row

(2) NO. of Contact

(3) P: Plug-Straight / PR: Plug-Right angle / PD: Plug-SMD

S: Socket-Straight / SR: Socket-Right angle /

(4) Contact Plating

GF: Gold Flash / G3: Gold Plated 3u"

SG: Select Gold Flash / T: Tin Plated

(5) Plastic Length

EX: FH-1x40S/GF-8.5

Female Header, Single row, 40pin / Socket, Straight, Gold Flash,

Plastic Length 8.5 mm

SER	REVISIONS	CHK	DATE	TOLERANCES	ARE
△	新圖發行	Pai	2007/03/30	X.	±0.100
				X.X	±0.050
				X.XX	±0.025
				X.XXX	±0.005
DRAWN	DATE	CHECKED	DATE	APPROVED	DATE
Pai	2007/03/30				

FLYING 汎翊國際有限公司

DRAWING NO

NAME

A-001

併排90°,母PIN



UNIT
MM

SCALE
1:1

REV
A