

A

B

C

D

E

## SPECIFICATIONS

Current rating : 3A AC, DC

Voltage rating : 250V AC, DC

Temperature range : -25°C to +85°C

Contact resistance : 10mΩ Max.



Insulation resistance : 1000MΩ Min.

Withstanding voltage : 800V AC/minute

Material : Nylon 66, UL94V-0



Poles	Dimension mm (in.)		Part No.
	A	B	
02	2.50 (0.098)	5.70(0.224)	CX-H250-02
03	5.00 (0.197)	8.20(0.323)	CX-H250-03
04	7.50 (0.295)	10.70(0.421)	CX-H250-04
05	10.00 (0.394)	13.20 (0.520)	CX-H250-05
06	12.50 (0.492)	15.70(0.618)	CX-H250-06
07	15.00 (0.591)	18.20(0.717)	CX-H250-07
08	17.50 (0.689)	20.70(0.815)	CX-H250-08
09	20.00 (0.787)	23.20(0.913)	CX-H250-09
10	22.50 (0.886)	25.70(1.012)	CX-H250-10
11	25.00 (0.984)	28.20(1.110)	CX-H250-11
12	27.50 (1.802)	30.70(1.209)	CX-H250-12
13	30.00 (1.181)	33.20(1.307)	CX-H250-13
14	32.50 (1.280)	35.70(1.406)	CX-H250-14
15	35.00 (1.378)	38.20(1.504)	CX-H250-15
16	37.50 (1.476)	40.70(1.602)	CX-H250-16
17	40.00 (1.578)	43.20(1.701)	CX-H250-17
18	42.50 (1.680)	45.70(1.799)	CX-H250-18
20	47.50 (1.870)	50.70(1.996)	CX-H250-20

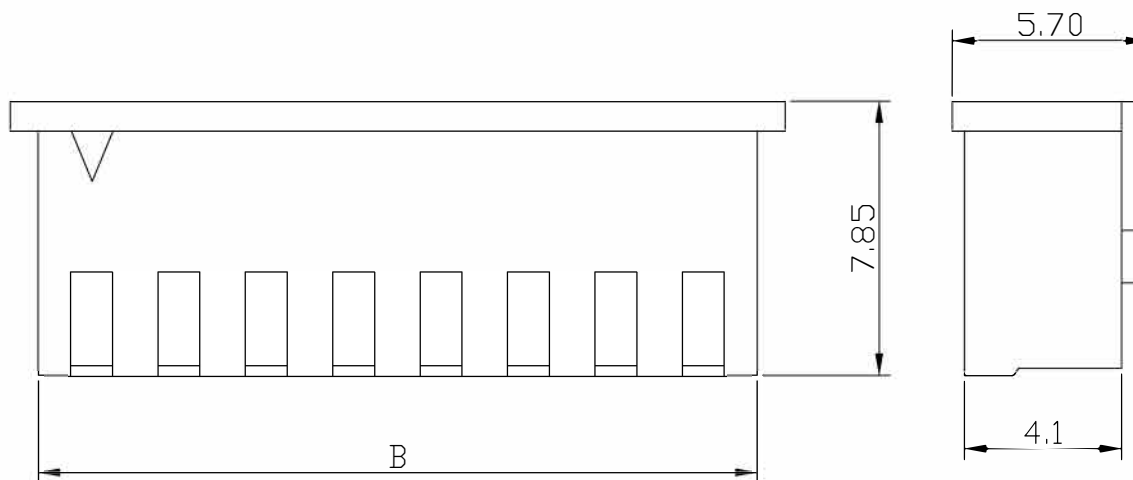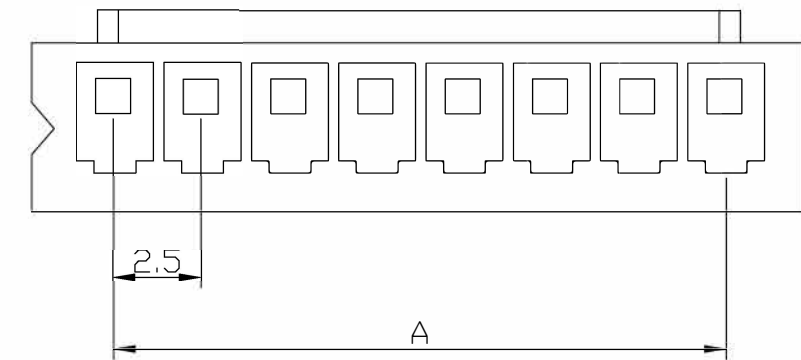

# FLYiNG

DESCRIPTION(内容)  
2.5mm Wire-to-Board Housing  
(RoHS)

PART NO:  
(料 號) **CX-H250-XX**  
DWG NO(圖號): **2500J-H**

DRAWN(製圖)  
**Gong**  
CHECKED(確認):  
**MANDY**

APPROVAL(核准):  
**JOHNNY**

GENERAL TOLERANCE:  
(公差)  
.X ±0.3  
.XX ±0.2

SCALE(比例):  
**FREE**

REV:  
**R4**  
UNIT:  
**mm**  
SIZE:  
**A4**  
SHEET:  
**1/1**

REV	DESCRIPTION	DATE
<b>R0</b>	環保料	2006.01.12
<b>R1</b>		2006.07.10
<b>R2</b>	變更環保章字樣	2006.08.15
<b>R3</b>	新增17.18P, 變更額定電流(原:2.5A)	2013.03.08
<b>R4</b>	2014年料號編碼統一兩碼	2014.11.11

A

B

C

D

E