

# FR201G THRU FR207G



## 2.0 AMP GLASS PASSIVATED FAST RECOVERY RECTIFIERS



### FEATURES

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability
- \* Glass passivated junction

### MECHANICAL DATA


- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any

### VOLTAGE RANGE

50 to 1000 Volts

### CURRENT

2.0 Amperes

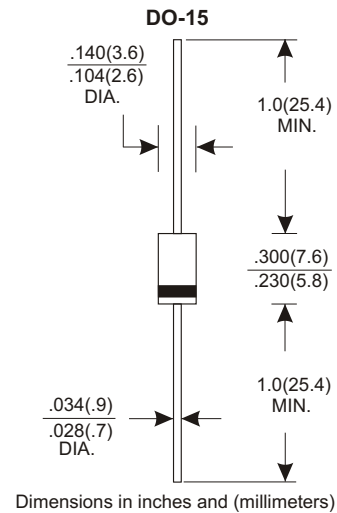

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
 Single phase half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

| TYPE NUMBER  | FR201G | FR202G | FR203G | FR204G | FR205G | FR206G | FR207G | UNITS      |    |
|--|--------|--------|--------|--------|--------|--------|--------|------------|----|
| Maximum Recurrent Peak Reverse Voltage   | 50     | 100    | 200    | 400    | 600    | 800    | 1000   | V          |    |
| Maximum RMS Voltage  | 35     | 70     | 140    | 280    | 420    | 560    | 700    | V          |    |
| Maximum DC Blocking Voltage  | 50     | 100    | 200    | 400    | 600    | 800    | 1000   | V          |    |
| Maximum Average Forward Rectified Current  |        |        |        |        |        |        |        |            |    |
| .375"(9.5mm) Lead Length at Ta=55°C  |        |        |        |        |        |        |        | 2.0        | A  |
| Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method) |        |        |        |        |        |        |        | 60         | A  |
| Maximum Instantaneous Forward Voltage at 2.0A  |        |        |        |        |        |        |        | 1.3        | V  |
| Maximum DC Reverse Current Ta=25°C   |        |        |        |        |        |        |        | 5.0        | μA |
| at Rated DC Blocking Voltage Ta=100°C  |        |        |        |        |        |        |        | 100        | μA |
| Maximum Reverse Recovery Time (Note 1)   | 150    |        |        |        | 250    | 500    |        | nS         |    |
| Typical Junction Capacitance (Note 2)  |        |        |        |        |        |        |        | 40         | pF |
| Operating and Storage Temperature Range Tj, Tstg   |        |        |        |        |        |        |        | -65 — +150 | °C |

#### NOTES:

1. Reverse Recovery Time test condition: IF=0.5A, IR=1.0A, IRR=0.25A
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

# RATING AND CHARACTERISTIC CURVES (FR201G THRU FR207G)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

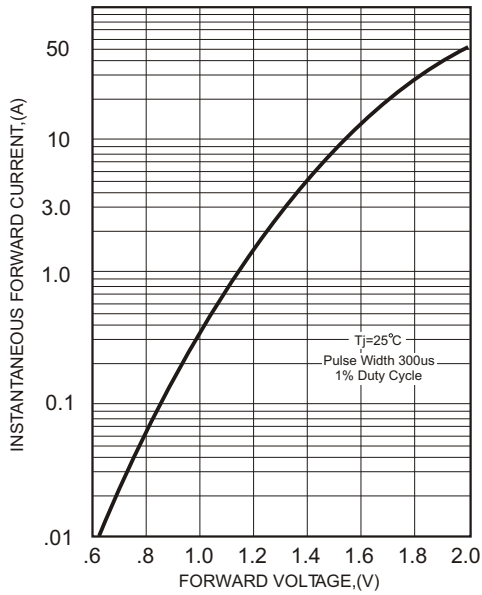


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

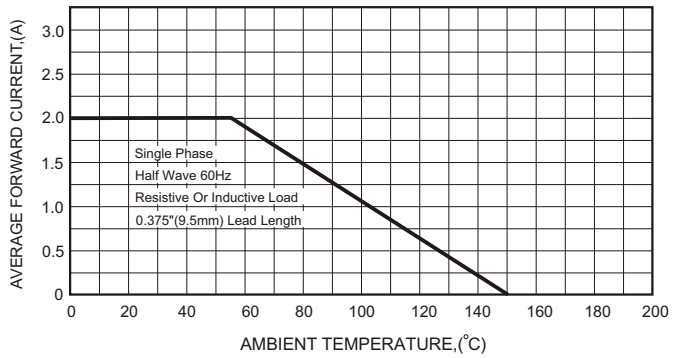


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


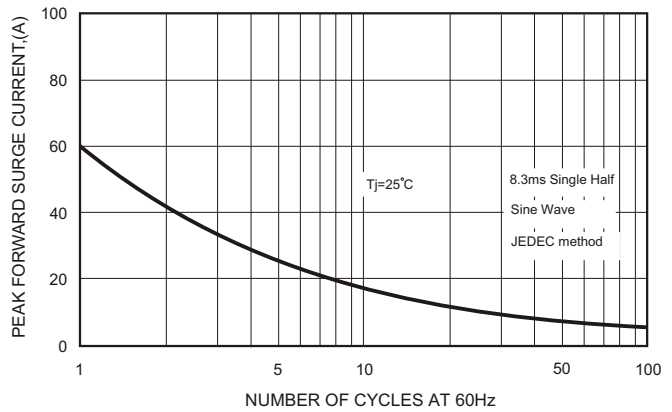


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

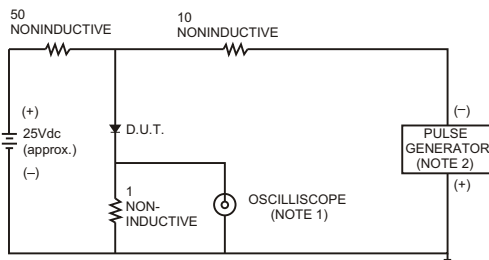

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm, 22pF.  
 2. Rise Time= 10ns max., Source Impedance= 50 ohms.

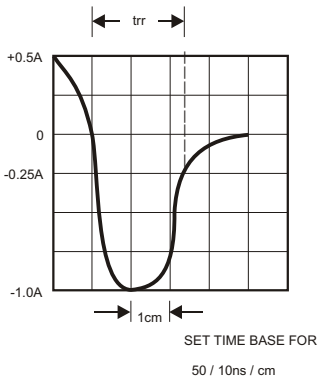


FIG.5-TYPICAL JUNCTION CAPACITANCE

