
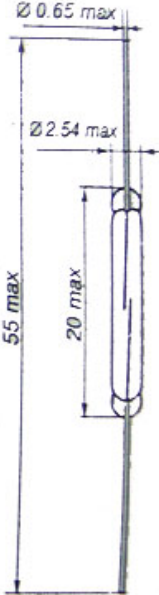


規 格 書
SPECIFICATIONS

Part #	MKA-20101
<p>Dimensions Units: mm</p> 	
Contact form	1A
Contact Position	SYM
Contact Material	Ru/Rh
Max. Contact Rating	10 W
Max. Switching Voltage	180 VDC
Max. Switching Current	0.5 A
Max. Initial Contact Resistance	100 mΩ
Pull In Value (AT)	21-42
Min. Drop out (AT)	9
Min. Breakdown Voltage	280 VDC
Max. Contact Capacitance	0.4 pf
Min. Insulation Resistance	10 ⁹ Ω
Typ. Resonant Frequency	2.6 KHz
Electrical Life (Resistive loads)	10 ⁷ (24VDC,250mA) 10 ⁶ (24vdc,250mA)
Test Coil: Number of turns Resistance	5,000 250Ω
UL file #	