

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:30mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃






Contact Material:Brass

Contact Plating: Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180℃ for 30-60 seconds
(200℃ for 10 seconds)

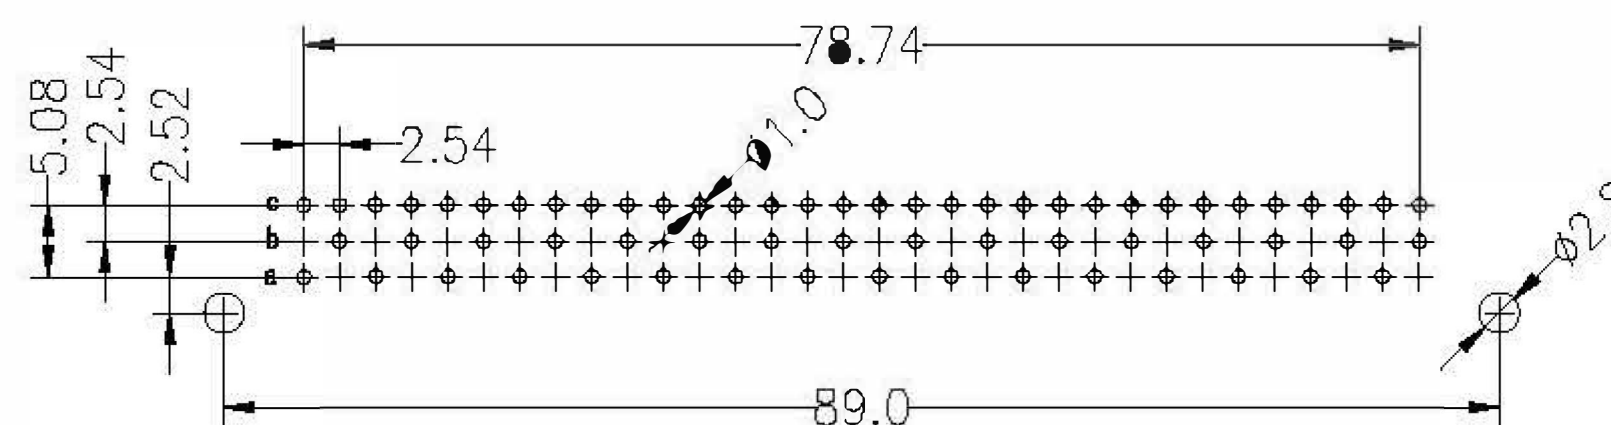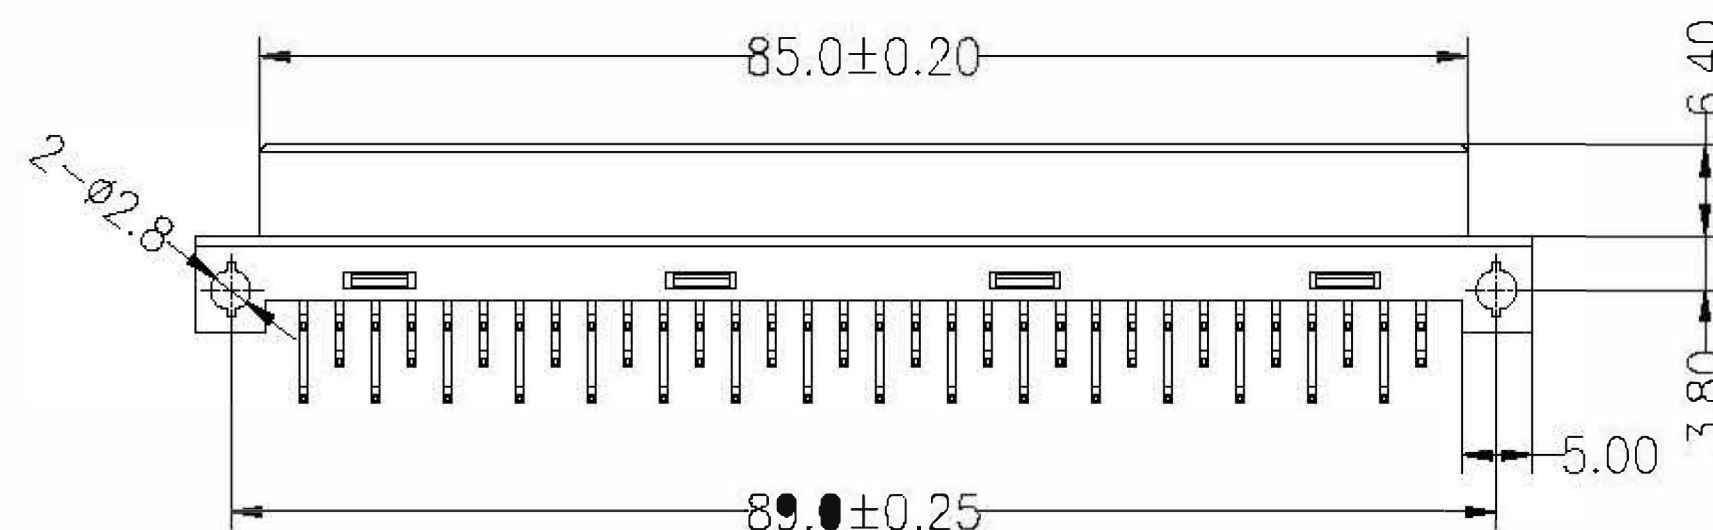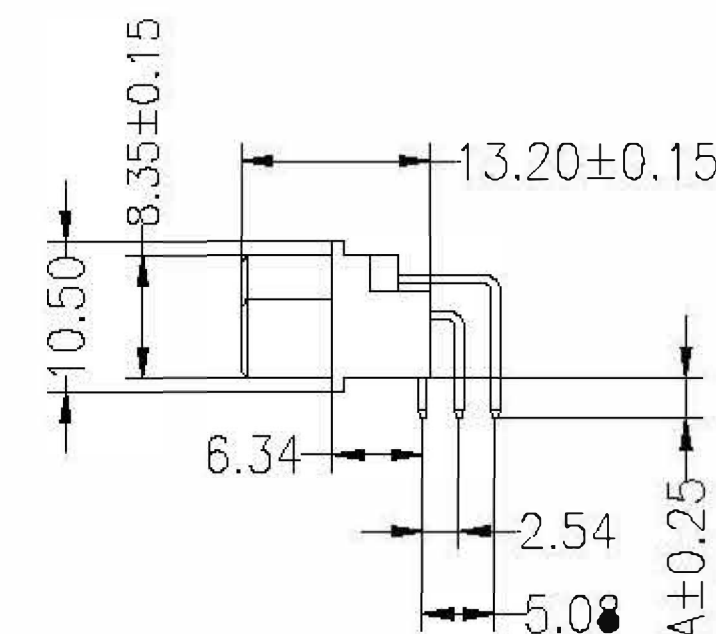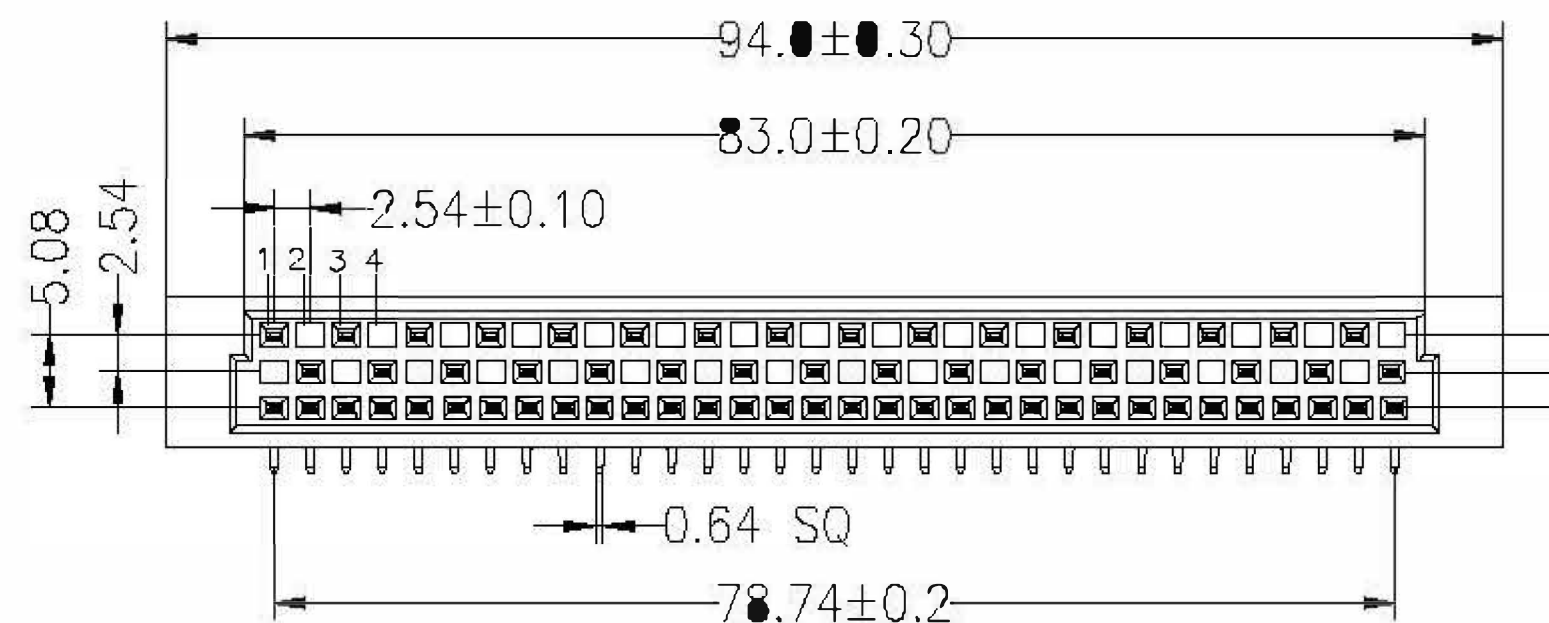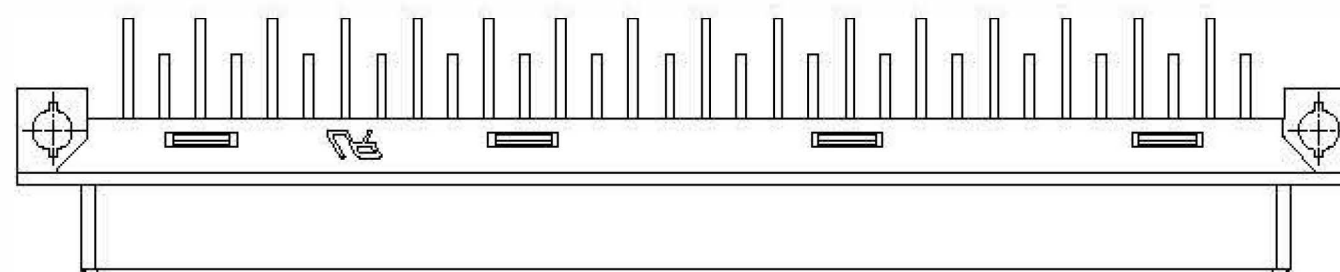

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

注: a排满针
b排缺单数Pin
c排缺双数Pin

Dimension antitheses list	
ITEM	A
Standard	2.90
Alternate	

Ordering Information

3511 3 96 A F R S0 B N A 2

No.of Pins
96PIN

Contact Type
F=Female

Contact Plating
G0:Gold Flash
S2:2U" Gold
S3:10U" Gold
S4:15U" Gold
S5:30U" Gold
S0:Gold Flash/Tin
SN:Tin

FLYiNG

				OPERATION		DRAW	JinChengXin	19.04.29	SCALE	FIT	FLYiNG	
				X.X	±0.30				UNIT	mm		
B	2019.04.29	增加UL标识		X.XX	±0.20	CHECK			SIZE	A4		
A0	2012.04.10	NEW DRAWING		X.XXX	±0.10		SHEET	1/1				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°	APPROVE			PROJ.		TITLE:	欧式插座 母座 90度 3x32PIN 成品系列图
				DIM	TOL							