

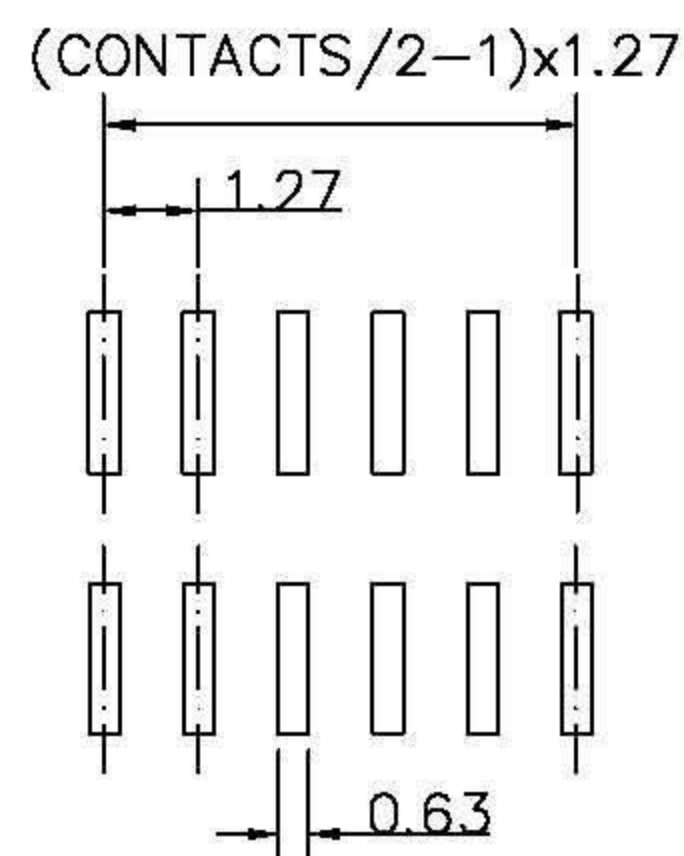
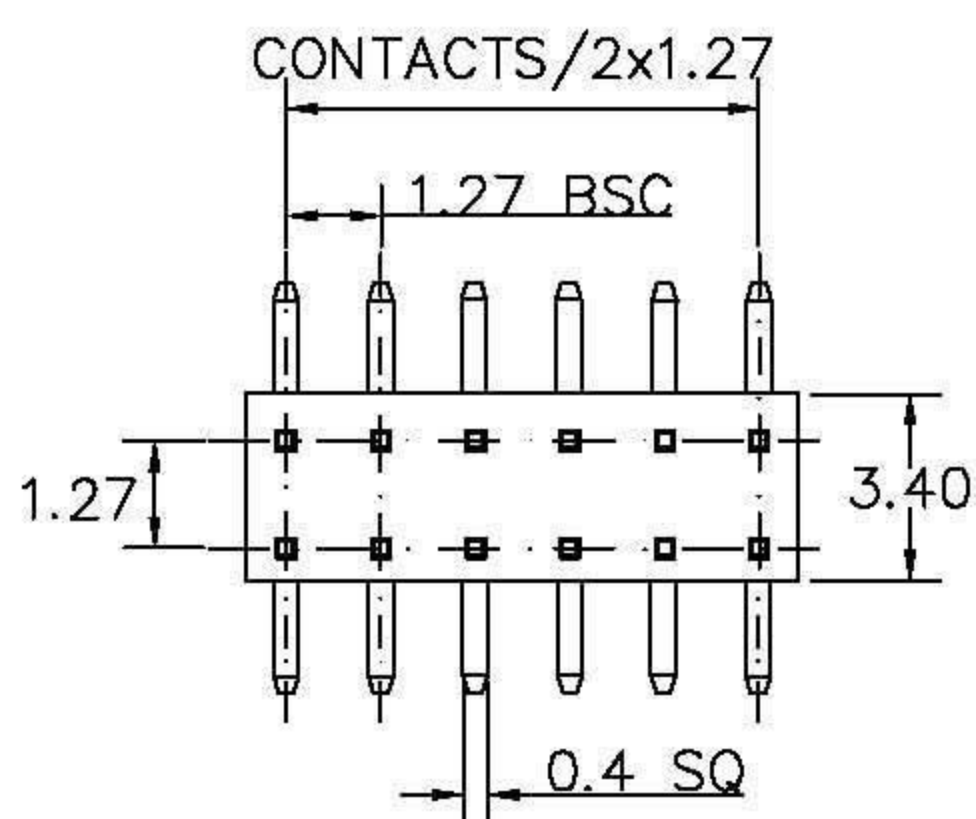


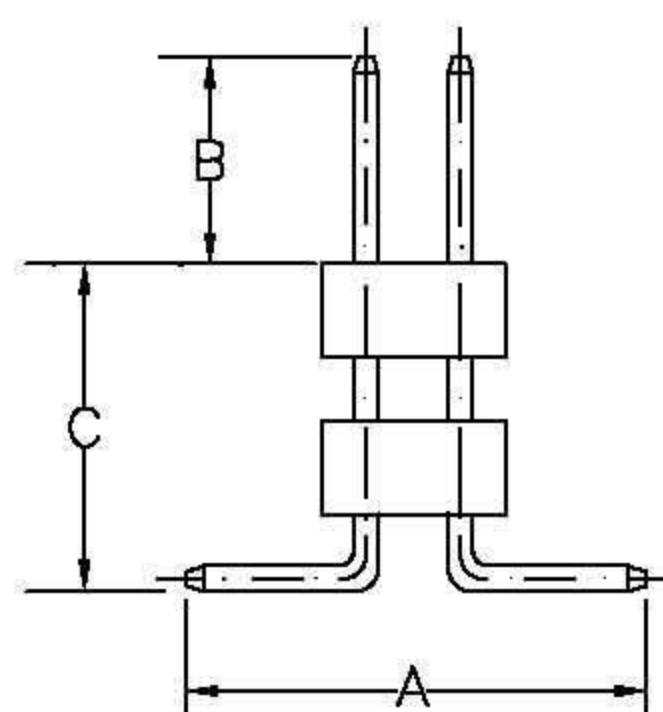

RECOMMENDED P.C.B LAYOUT

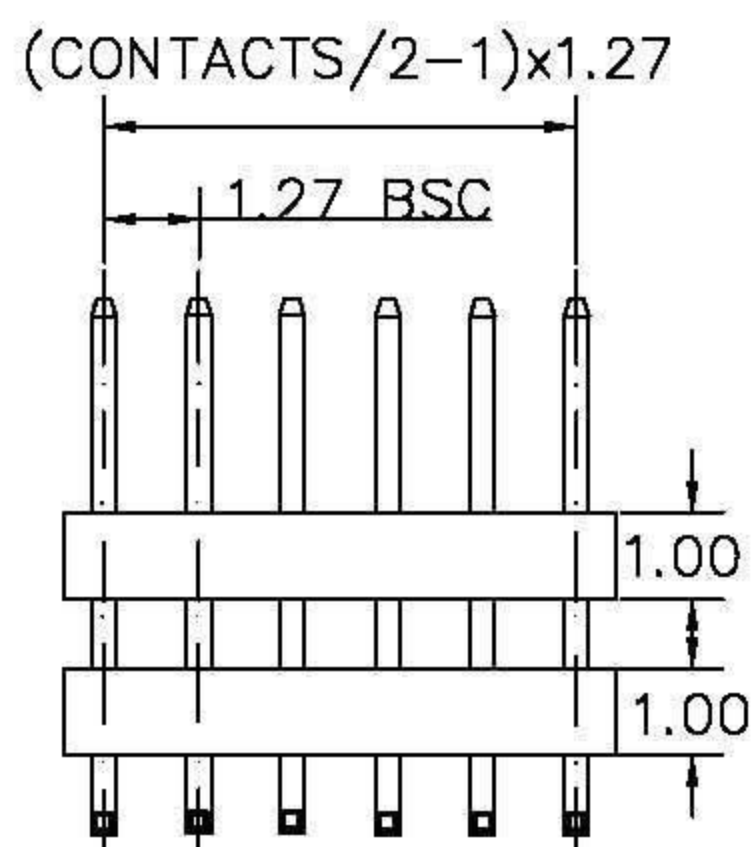

A: _____ mm B: _____ mm C: _____ mm

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 1A

OPERATING TEMPERATURE: -40°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 5000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : AC 500V RMS

CONTACTS	
2X26	2X27
2X2	2X28
2X3	2X29
2X4	2X30
2X5	2X31
2X6	2X32
2X7	2X33
2X8	2X34
2X9	2X35
2X10	2X36
2X11	2X37
2X12	2X38
2X13	2X39
2X14	2X40
2X15	2X41
2X16	2X42
2X17	2X43
2X18	2X44
2X19	2X45
2X20	2X46
2X21	2X47
2X22	2X48
2X23	2X49
2X24	2X50
2X25	

比例 (SCALE)

FREE

繪圖 (DRAW)

Tina

單位 (UNIT)

MM

審核 (CHECK)

/ /

一般公差 (TOLERANCE)


承認 (APPROVE)

/ /

投影法

PROJECTION

第三角

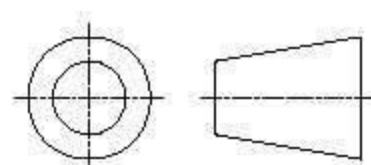

FLYiNG
INTERNATIONAL

圖名 (NAME) : PIN HEADER 1.27X1.27 SMD

料號 (PART NO) 114-23XX7-XXXX

圖號 (DRAW NO) 2XSMDH2

0=±0.38
00=±0.25
ANG=±5°