

Features:




- 2 ~ 12 circuits available.
- Material: LCP.
- .0246" (0.625mm) square pins.
- Tin-plated brass pin.
- Standard color: Black

Specification:


Current rating:

wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A


- Voltage rating: 250V AC(RMS) or DC.
- Contact resistance: 10mΩ Max.
- Dielectric strength: 1500V AC/minute.
- Temperature rise: 30°C MAX.
(carry rated current load)
- Ambient temperature range: -40°C ~ 105°C
- Operating temperature range: -40°C ~ 105°C

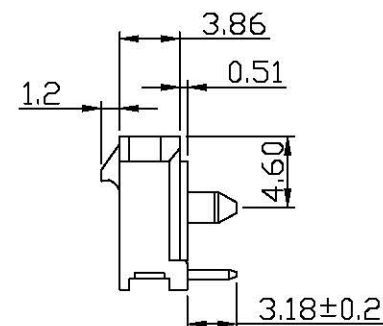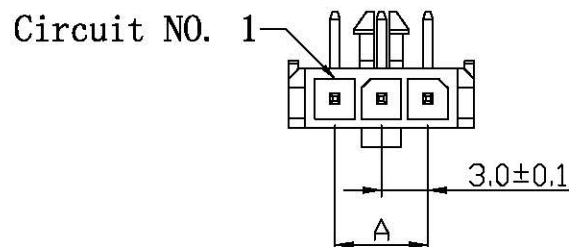


2 Circuits



3 Circuits

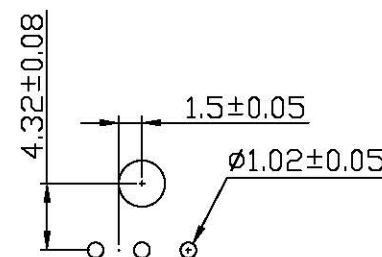

4~12 Circuits



PCB Layout

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
02	3.0	9.65	04	9.0	15.65	06	15.0	21.65	08	21.0	27.65	10	27.0	33.65	12	33.0	39.65
03	6.0	12.65	05	12.0	18.65	07	18.0	24.65	09	24.0	30.65	11	30.0	36.65			

FLYING
INTERNATIONAL

DESCRIPTION(内容):

**.118" (3.0mm) Single Row
Right Angle Header (RoHS)**

PART NO:
(料 號) CMF-W300R-1X _CF487
DWG NO(圖號): 3046-xxS

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)
.00 ±0.15
.0 ±0.25

SCALE(比例):

FREE

REV:

R3

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE(RoHS)

變更材質, (原NY46) & 變更Dim. B尺寸

變更材質, (原NY6T)

新增環境溫度&工作溫度

DATE

2007.03.07

2011.09.21

2014.07.11

2014.12.11