






2x1Pin




2x2Pin



2x3Pin

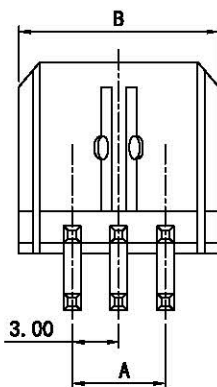

2x4~2x12Pin



Specification

Electrical

Voltage rating: 250V DC/AC

Current Rating: 5.0A AC, DC

Insulation Resistance: 1000M Ω / min.

Dielectric Withstanding Voltage: 1500V AC/ min.

Contact Resistance: 10m Ω / Max.

Physical

Plastic: Nylon 6T ,UL94V-0 / (black)

Contact: Brass/Tin Plated

Operating Temp.: -25°C ~ +85°C



Poles	Dimension (mm)					Part No.
	A	B	C	D	E	
02	—	6.65	1.0	3.15	—	CMF-W300R-2x01-CF091
04	3.00	9.65	1.0	3.15	—	CMF-W300R-2x02-CF091
06	6.00	12.65	1.0	3.15	—	CMF-W300R-2x03-CF091
08	9.00	15.65	6.0	8.0	4.6	CMF-W300R-2x04-CF091
10	12.00	18.65	9.0	11.0	7.6	CMF-W300R-2x05-CF091
12	15.00	21.65	12.0	14.0	10.6	CMF-W300R-2x06-CF091
14	18.00	24.65	15.0	17.0	13.6	CMF-W300R-2x07-CF091
16	21.00	27.65	18.0	20.0	16.6	CMF-W300R-2x08-CF091
18	24.00	30.65	21.0	23.0	19.6	CMF-W300R-2x09-CF091
20	27.00	33.65	24.0	26.0	22.6	CMF-W300R-2x10-CF091
22	30.00	36.65	27.0	29.0	25.6	CMF-W300R-2x11-CF091
24	33.00	39.65	30.0	32.0	28.6	CMF-W300R-2x12-CF091

FLYING
INTERNATIONAL

DESCRIPTION(内容):

WAFER MICRO FIT 3.0mm
Dual Row DIP 90° TYPE
(RoHS)

PART NO: CMF-W300R-2xXX-CF091

DWG NO(圖號): 3001-XX-RT

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

X.XX $\pm$ 0.2
X.X $\pm$ 0.3

SCALE(比例):

FREE



REV:

R3

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

補充尺寸C, D, E & 變更尺寸B

2014年斜號Pin號碼統一

變更工作溫度(原:-25°C~+105°C)

DATE

2008.07.22

2009.12.29

2014.09.04

2016.10.20