


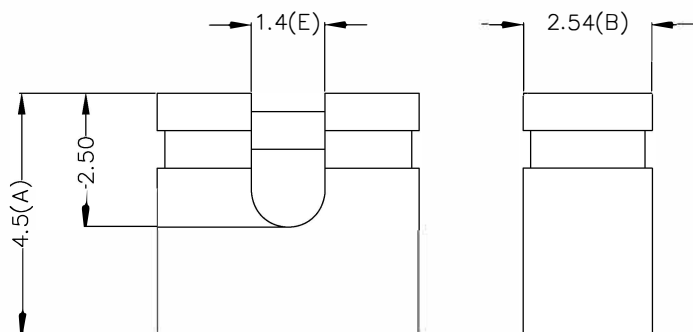

FEATURES


Double tuning fork type contact guarantees high reliability.
2.54MM pitch Low-Profile mini type Match to 0.64mm sq. posts.

MATERIAL

- Insulator 30% Glass Filled P.B.T. (UL 94v-0)
- Contact Gold Plated
- Terminal 5191 Phosphor Bronze

SPECIFICATIONS

- Current Rating: 3 Amperes MAX
- Contact Resistance: 30mΩ MAX
- Insulation Resistance: 1000 Megohms min.
- Dielectric Withstanding Voltage: AC 650 volts RMS at sea level

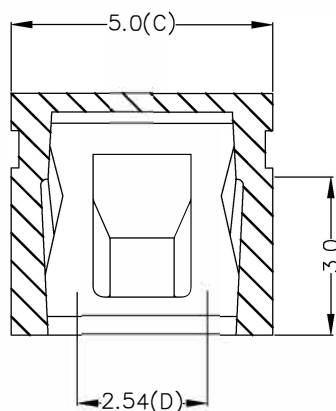

CONTACT
POINT



FLYiNG

DESCRIPTION(内容)	DRAWN(製圖): Gary	GENERAL TOLERANCE: (公差) *以上圖示塑膠公差皆為±0.15 金屬公差皆為±0.05	REV: R3	REV	DESCRIPTION	DATE
			UNIT: mm	R0		
MINI JUMPER 2.54mm Pitch OPEN TYPE(RoHS)	CHECKED(確認): MANDY		SIZE: A4	R1	環保料	2006.07.17
PART NO: (料號) CMJ-45BB	APPROVAL(核准): JOHNNY	SCALE(比例): FREE	SHEET: 1/1	R2	變更環保章字樣	2006.08.11
DWG NO(圖號): MJ-4.6B/YM00802				R3	變更Insuiation Resistance	2006.10.20