



REV.	ECN NO.	REVISED	DATE

NOTE:

1. MATERIAL:

- a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0
- b. CONTACT: PHOSPHOR BRONZE
(SURFACE PLATING: SN 100u")
SEE ORDERING INFORMATION

2. ELECTRIC:

- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c. DIELECTRIC VOLTAGE: 750V AC ONE SEC LEVEL
- d. OPERATING TEMPERATURE: -25° C ~ +85° C

ORDERING INFORMATION

F-01-A***001

電池座系列

F-1系列

DIP 90° TYPE

PLATING:

A-Au1U"
J-Ni100U"~120U"
K-SN100U"~120U"





MATERIAL:

1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程部

2013. 3. 16

ZhouRuiCai

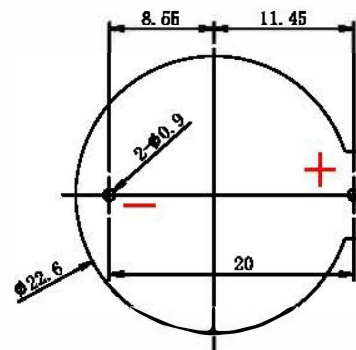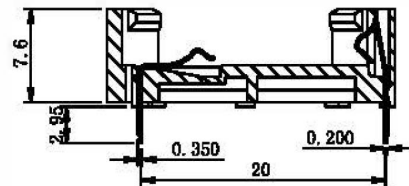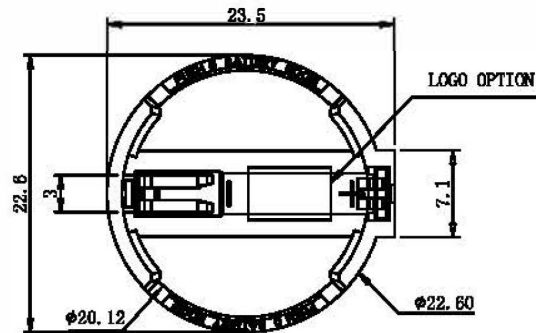

PCB Layout Diagram
Top View

3	TERMINAL (-)	1	PHOSPHOR BRONZE, T=0.20MM	Sn-Plating
2	TERMINAL (+)	1	PHOSPHOR BRONZE, T=0.20MM	Sn-Plating
1	HOUSING	1	PBT	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES:		FLYING 汎翊國際有限公司 INTERNATIONAL			
DECIMALS:	ANGLES:	SCALE: 1:1	SIZE: A4	VIEW:	PART NO:
X : ±0.30 X : 0.25 XX : ±0.20 XXX : ±0.10	X : ±1° X : ±0.5°	UNIT: mm	REV.: A/0	OBJECT: MY	F-01-A1AK001
WEIGHT: 0.8 g	SHEET 1 OF 1	DSND	YangFeng	DATE	2013. 3. 14
		CHKD	ZhouRuicai	DATE	2013. 3. 15
		APVD	XueZhengy	DATE	2013. 3. 15
					TITLE: F-2032-1