

## FEATURES


- Output Current Up to 100mA
- No External Components
- Internal Thermal Overload Protection
- Internal Short-Circuit Limiting
- Output Voltage of 5V, 6V, 8V, 9V, 12V, 15V, 18V and 24V
- Moisture Sensitivity Level 3

## DESCRIPTION


This series of fixed-voltage monolithic integrated-circuit voltage regulators is designed for a wide range of applications. These applications include on-card regulation for elimination of noise and distribution problems associated with single-point regulation. In addition, they can be used with power-pass elements to make high current voltage regulators.

Each of these regulators can deliver up to 100mA of output current. The internal limiting and thermal shutdown features of these regulators make them essentially immune to overload. When used as a replacement for a zener diode-resistor combination, an effective improvement in output impedance can be obtained together with lower-bias current.

TO-92 PKG



SOT-89 PKG



## ORDERING INFORMATION

| Device    | Package        |
|-----------|----------------|
| LM79LXX   | TO-92 (Bulk)   |
| LM79LXXTA | TO-92 (Taping) |
| LM79LXXF  | SOT-89         |

XX : Output Voltage = 05, 06, 08, 09, 12, 15, 18, 24

## Absolute Maximum Ratings

| CHARACTERISTIC                                                |                   | SYMBOL        | MIN. | MAX.  | UNIT                      |
|---------------------------------------------------------------|-------------------|---------------|------|-------|---------------------------|
| Input Voltage                                                 | LM79L05 ~ LM79L09 | $V_{IN}$      | -    | -30   | V                         |
|                                                               | LM79L12 ~ LM79L18 |               | -    | -35   |                           |
|                                                               | LM79L24           |               | -    | -40   |                           |
| Maximum Power Dissipation at $T_A = 25^\circ\text{C}$ / TO-92 |                   | $P_{DMax}$    | -    | 0.770 | W                         |
| Thermal Resistance Junction-To-Ambient / TO-92                |                   | $\theta_{JA}$ | -    | 162   | $^\circ\text{C}/\text{W}$ |
| Lead Temperature (Soldering, 10 sec)                          |                   | $T_{SOL}$     | -    | 260   | $^\circ\text{C}$          |
| Storage Temperature Range                                     |                   | $T_{STG}$     | -65  | 150   | $^\circ\text{C}$          |
| Operating Junction Temperature Range                          |                   | $T_{JOPR}$    | 0    | 150   | $^\circ\text{C}$          |

## 3-TERMINAL 0.1A NEGATIVE VOLTAGE REGULATOR

**LM79LXX**

### Recommended Operating Conditions

| CHARACTERISTIC                         |         | SYMBOL   | MIN.  | MAX. | UNIT |
|----------------------------------------|---------|----------|-------|------|------|
| Input Voltage                          | LM79L05 | $V_{IN}$ | -7    | -20  | V    |
|                                        | LM79L06 |          | -8    | -20  |      |
|                                        | LM79L08 |          | -10.5 | -23  |      |
|                                        | LM79L09 |          | -11.5 | -24  |      |
|                                        | LM79L12 |          | -14.5 | -27  |      |
|                                        | LM79L15 |          | -17.5 | -30  |      |
|                                        | LM79L18 |          | -20.5 | -33  |      |
|                                        | LM79L24 |          | -27   | -38  |      |
| Output Current                         |         | $I_O$    | -     | 100  | mA   |
| Operating Virtual Junction Temperature |         | $T_J$    | 0     | 125  | °C   |

### Ordering Information


| $V_{OUT}$ | Package | Order No. | Description    | Supplied As | Status |
|-----------|---------|-----------|----------------|-------------|--------|
| 5.0V      | TO-92   | LM79L05   | 0.1A, Negative | Bulk        | Active |
|           |         | LM79L05TA | 0.1A, Negative | Taping      | Active |
|           | SOT-89  | LM79L05F  | 0.1A, Negative | Reel        | Active |
| 6.0V      | TO-92   | LM79L06   | 0.1A, Negative | Bulk        | Active |
|           |         | LM79L06TA | 0.1A, Negative | Taping      | Active |
|           | SOT-89  | LM79L06F  | 0.1A, Negative | Reel        | Active |
| 8.0V      | TO-92   | LM79L08   | 0.1A, Negative | Bulk        | Active |
|           |         | LM79L08TA | 0.1A, Negative | Taping      | Active |
|           | SOT-89  | LM79L08F  | 0.1A, Negative | Reel        | Active |
| 9.0V      | TO-92   | LM79L09   | 0.1A, Negative | Bulk        | Active |
|           |         | LM79L09TA | 0.1A, Negative | Taping      | Active |
|           | SOT-89  | LM79L09F  | 0.1A, Negative | Reel        | Active |
| 12V       | TO-92   | LM79L12   | 0.1A, Negative | Bulk        | Active |
|           |         | LM79L12TA | 0.1A, Negative | Taping      | Active |
|           | SOT-89  | LM79L12F  | 0.1A, Negative | Reel        | Active |
| 15V       | TO-92   | LM79L15   | 0.1A, Negative | Bulk        | Active |
|           |         | LM79L15TA | 0.1A, Negative | Taping      | Active |
|           | SOT-89  | LM79L15F  | 0.1A, Negative | Reel        | Active |

## 3-TERMINAL 0.1A NEGATIVE VOLTAGE REGULATOR


## LM79LXX

### Ordering Information (Continued)


| V <sub>OUT</sub> | Package | Order No. | Description    | Supplied As | Status |
|------------------|---------|-----------|----------------|-------------|--------|
| 18V              | TO-92   | LM79L18   | 0.1A, Negative | Bulk        | Active |
|                  |         | LM79L18TA | 0.1A, Negative | Taping      | Active |
|                  | SOT-89  | LM79L18F  | 0.1A, Negative | Reel        | Active |
| 24V              | TO-92   | LM79L24   | 0.1A, Negative | Bulk        | Active |
|                  |         | LM79L24TA | 0.1A, Negative | Taping      | Active |
|                  | SOT-89  | LM79L24F  | 0.1A, Negative | Reel        | Active |

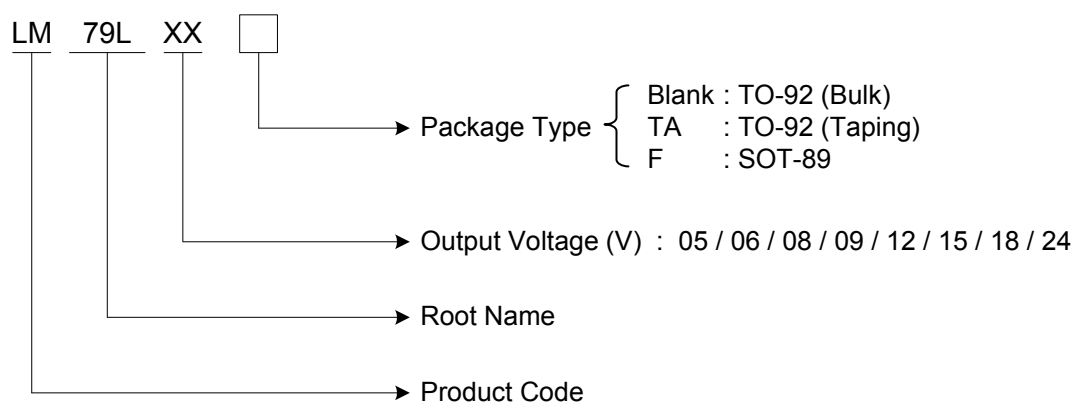

## PIN CONFIGURATION



TO-92




SOT-89

## PIN DESCRIPTION

| Pin No. | TO-92 / SOT-89 3 LEAD |                |
|---------|-----------------------|----------------|
|         | Name                  | Function       |
| 1       | GND                   | Ground         |
| 2       | $V_{IN}$              | Input Voltage  |
| 3       | $V_{OUT}$             | Output Voltage |

## TYPICAL APPLICATION

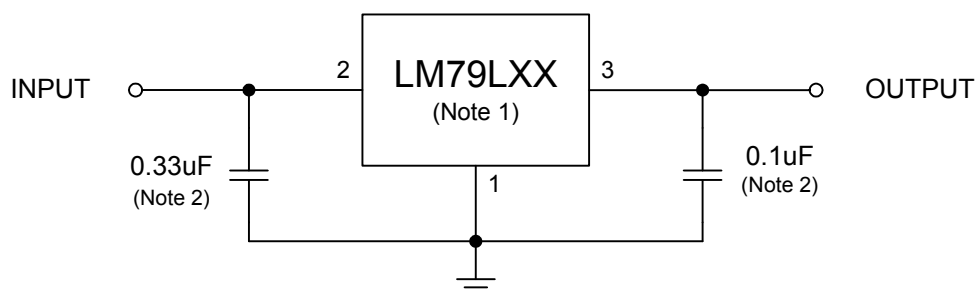

Note 1. To specify an output voltage, substitute voltage for "XX".

Note 2. Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

### 3-TERMINAL 0.1A NEGATIVE VOLTAGE REGULATOR

**LM79LXX**

#### ELECTRICAL CHARACTERISTICS

**LM79L05** (At specified virtual junction temperature,  $V_{IN} = 10V$ ,  $I_O = 40mA$  (Unless otherwise noted))

| PARAMETER                          | SYMBOL            | TEST CONDITION <sup>(Note 1)</sup>                     |             | MIN.  | TYP. | MAX.  | UNIT |
|------------------------------------|-------------------|--------------------------------------------------------|-------------|-------|------|-------|------|
| Output Voltage <sup>(Note 2)</sup> | $V_{OUT}$         |                                                        | 25°C        | -4.8  | -5   | -5.2  | V    |
|                                    |                   | $1mA \leq I_O \leq 40mA$<br>$-7V \leq V_{IN} \leq 20V$ | 0°C ~ 125°C | -4.75 | -5   | -5.25 |      |
|                                    |                   | $1mA \leq I_O \leq 70mA$                               |             | -4.75 | -5   | -5.25 |      |
| Line Regulation                    | $\Delta V_{LINE}$ | $-7V \leq V_{IN} \leq -20V$                            | 25°C        |       | 32   | 150   | mV   |
|                                    |                   | $-8V \leq V_{IN} \leq -20V$                            |             |       | 26   | 100   |      |
| Load Regulation                    | $\Delta V_{LOAD}$ | $1mA \leq I_O \leq 100mA$                              | 25°C        |       | 15   | 60    | mV   |
|                                    |                   | $1mA \leq I_O \leq 40mA$                               |             |       | 8    | 30    |      |
| Bias Current                       | $I_B$             |                                                        | 25°C        |       | 3.8  | 6     | mA   |
|                                    |                   |                                                        | 125°C       |       |      | 5.5   |      |
| Bias Current Change                | $\Delta I_B$      | $-8V \leq V_{IN} \leq -20V$                            | 0°C ~ 125°C |       |      | 1.5   | mA   |
|                                    |                   | $1mA \leq I_O \leq 40mA$                               |             |       |      | 0.1   |      |
| Output Noise Voltage               | $V_N$             | $10Hz \leq f \leq 100kHz$                              | 25°C        |       | 42   |       | µV   |
| Ripple Rejection                   | RR                | $-8V \leq V_{IN} \leq -18V$ ,<br>$f=120Hz$             | 25°C        | 41    | 49   |       | dB   |
| Dropout Voltage                    | $V_D$             |                                                        | 25°C        |       | 1.7  |       | V    |

**LM79L06** (At specified virtual junction temperature,  $V_{IN} = 11V$ ,  $I_O = 40mA$  (Unless otherwise noted))

| PARAMETER                          | SYMBOL            | TEST CONDITION <sup>(Note 1)</sup>                      |             | MIN.  | TYP. | MAX.  | UNIT |
|------------------------------------|-------------------|---------------------------------------------------------|-------------|-------|------|-------|------|
| Output Voltage <sup>(Note 2)</sup> | $V_{OUT}$         |                                                         | 25°C        | -5.76 | -6   | -6.24 | V    |
|                                    |                   | $1mA \leq I_O \leq 40mA$<br>$-8V \leq V_{IN} \leq -21V$ | 0°C ~ 125°C | -5.7  | -6   | -6.3  |      |
|                                    |                   | $1mA \leq I_O \leq 70mA$                                |             | -5.7  | -6   | -6.3  |      |
| Line Regulation                    | $\Delta V_{LINE}$ | $-8V \leq V_{IN} \leq -21V$                             | 25°C        |       | 50   | 150   | mV   |
|                                    |                   | $-9V \leq V_{IN} \leq -21V$                             |             |       | 45   | 110   |      |
| Load Regulation                    | $\Delta V_{LOAD}$ | $1mA \leq I_O \leq 100mA$                               | 25°C        |       | 12   | 70    | mV   |
|                                    |                   | $1mA \leq I_O \leq 40mA$                                |             |       | 5.5  | 35    |      |
| Bias Current                       | $I_B$             |                                                         | 25°C        |       |      | 6     | mA   |
|                                    |                   |                                                         | 125°C       |       |      | 5.5   |      |
| Bias Current Change                | $\Delta I_B$      | $-9V \leq V_{IN} \leq -21V$                             | 0°C ~ 125°C |       |      | 1.5   | mA   |
|                                    |                   | $1mA \leq I_O \leq 40mA$                                |             |       |      | 0.1   |      |
| Output Noise Voltage               | $V_N$             | $10Hz \leq f \leq 100kHz$                               | 25°C        |       | 50   |       | µV   |
| Ripple Rejection                   | RR                | $-9V \leq V_{IN} \leq -19V$ ,<br>$f=120Hz$              | 25°C        | 39    | 47   |       | dB   |
| Dropout Voltage                    | $V_D$             |                                                         | 25°C        |       | 1.7  |       | V    |

### 3-TERMINAL 0.1A NEGATIVE VOLTAGE REGULATOR

### LM79LXX

**LM79L08** (At specified virtual junction temperature,  $V_{IN} = 14V$ ,  $I_o = 40mA$  (Unless otherwise noted))

| PARAMETER                          | SYMBOL            | TEST CONDITION <sup>(Note 1)</sup>                         |             | MIN. | TYP. | MAX. | UNIT |
|------------------------------------|-------------------|------------------------------------------------------------|-------------|------|------|------|------|
| Output Voltage <sup>(Note 2)</sup> | $V_{OUT}$         |                                                            | 25°C        | -7.7 | -8   | -8.3 | V    |
|                                    |                   | $1mA \leq I_o \leq 40mA$<br>$-10.5V \leq V_{IN} \leq -23V$ | 0°C ~ 125°C | -7.6 | -8   | -8.4 |      |
|                                    |                   | $1mA \leq I_o \leq 70mA$                                   |             | -7.6 | -8   | -8.4 |      |
| Line Regulation                    | $\Delta V_{LINE}$ | $-10.5V \leq V_{IN} \leq -23V$                             | 25°C        |      | 20   | 175  | mV   |
|                                    |                   | $-11V \leq V_{IN} \leq -23V$                               |             |      | 12   | 125  |      |
| Load Regulation                    | $\Delta V_{LOAD}$ | $1mA \leq I_o \leq 100mA$                                  | 25°C        |      | 18   | 80   | mV   |
|                                    |                   | $1mA \leq I_o \leq 40mA$                                   |             |      | 9    | 42   |      |
| Bias Current                       | $I_B$             |                                                            | 25°C        |      |      | 6.5  | mA   |
|                                    |                   |                                                            | 125°C       |      |      | 6    |      |
| Bias Current Change                | $\Delta I_B$      | $-11V \leq V_{IN} \leq -23V$                               | 0°C ~ 125°C |      |      | 1.5  | mA   |
|                                    |                   | $1mA \leq I_o \leq 40mA$                                   |             |      |      | 0.1  |      |
| Output Noise Voltage               | $V_N$             | $10Hz \leq f \leq 100kHz$                                  | 25°C        |      | 60   |      | uV   |
| Ripple Rejection                   | RR                | $-12V \leq V_{IN} \leq -23V$ ,<br>$f=120Hz$                | 25°C        | 42   | 49   |      | dB   |
| Dropout Voltage                    | $V_D$             |                                                            | 25°C        |      | 1.7  |      | V    |

**LM79L09** (At specified virtual junction temperature,  $V_{IN} = 15V$ ,  $I_o = 40mA$  (Unless otherwise noted))

| PARAMETER                          | SYMBOL            | TEST CONDITION <sup>(Note 1)</sup>                       |             | MIN.  | TYP. | MAX.  | UNIT |
|------------------------------------|-------------------|----------------------------------------------------------|-------------|-------|------|-------|------|
| Output Voltage <sup>(Note 2)</sup> | $V_{OUT}$         |                                                          | 25°C        | -8.64 | -9   | -9.36 | V    |
|                                    |                   | $1mA \leq I_o \leq 40mA$<br>$-11V \leq V_{IN} \leq -24V$ | 0°C ~ 125°C | -8.55 | 9    | -9.45 |      |
|                                    |                   | $1mA \leq I_o \leq 70mA$                                 |             | -8.55 | 9    | -9.45 |      |
| Line Regulation                    | $\Delta V_{LINE}$ | $-11V \leq V_{IN} \leq -24V$                             | 25°C        |       | 80   | 200   | mV   |
|                                    |                   | $-12V \leq V_{IN} \leq -24V$                             |             |       | 20   | 160   |      |
| Load Regulation                    | $\Delta V_{LOAD}$ | $1mA \leq I_o \leq 100mA$                                | 25°C        |       | 17   | 90    | mV   |
|                                    |                   | $1mA \leq I_o \leq 40mA$                                 |             |       | 8    | 45    |      |
| Bias Current                       | $I_B$             |                                                          | 25°C        |       | 3.8  | 6.5   | mA   |
|                                    |                   |                                                          | 125°C       |       |      | 6     |      |
| Bias Current Change                | $\Delta I_B$      | $-12V \leq V_{IN} \leq -24V$                             | 0°C ~ 125°C |       |      | 1.5   | mA   |
|                                    |                   | $1mA \leq I_o \leq 40mA$                                 |             |       |      | 0.1   |      |
| Output Noise Voltage               | $V_N$             | $10Hz \leq f \leq 100kHz$                                | 25°C        |       | 64   |       | uV   |
| Ripple Rejection                   | RR                | $-8V \leq V_{IN} \leq -18V$ ,<br>$f=120Hz$               | 25°C        | 35    | 43   |       | dB   |
| Dropout Voltage                    | $V_D$             |                                                          | 25°C        |       | 1.7  |       | V    |

### 3-TERMINAL 0.1A NEGATIVE VOLTAGE REGULATOR

### LM79LXX

**LM79L12** (At specified virtual junction temperature,  $V_{IN} = 19V$ ,  $I_O = 40mA$  (Unless otherwise noted))

| PARAMETER                          | SYMBOL            | TEST CONDITION <sup>(Note 1)</sup>                         |             | MIN.  | TYP. | MAX.  | UNIT |
|------------------------------------|-------------------|------------------------------------------------------------|-------------|-------|------|-------|------|
| Output Voltage <sup>(Note 2)</sup> | $V_{OUT}$         |                                                            | 25°C        | -11.5 | -12  | -12.5 | V    |
|                                    |                   | $1mA \leq I_O \leq 40mA$<br>$-14.5V \leq V_{IN} \leq -27V$ | 0°C ~ 125°C | -11.4 | -12  | -12.6 |      |
|                                    |                   | $1mA \leq I_O \leq 70mA$                                   |             | -11.4 | -12  | -12.6 |      |
| Line Regulation                    | $\Delta V_{LINE}$ | $-14.5V \leq V_{IN} \leq -27V$                             | 25°C        |       | 50   | 250   | mV   |
|                                    |                   | $-16V \leq V_{IN} \leq -27V$                               |             |       | 40   | 200   |      |
| Load Regulation                    | $\Delta V_{LOAD}$ | $1mA \leq I_O \leq 100mA$                                  | 25°C        |       | 24   | 100   | mV   |
|                                    |                   | $1mA \leq I_O \leq 40mA$                                   |             |       | 15   | 50    |      |
| Bias Current                       | $I_B$             |                                                            | 25°C        |       |      | 6.5   | mA   |
|                                    |                   |                                                            | 125°C       |       |      | 6     |      |
| Bias Current Change                | $\Delta I_B$      | $-16V \leq V_{IN} \leq -27V$                               | 0°C ~ 125°C |       |      | 1.5   | mA   |
|                                    |                   | $1mA \leq I_O \leq 40mA$                                   |             |       |      | 0.1   |      |
| Output Noise Voltage               | $V_N$             | $10Hz \leq f \leq 100kHz$                                  | 25°C        |       | 70   |       | uV   |
| Ripple Rejection                   | RR                | $-15V \leq V_{IN} \leq -25V$ ,<br>$f=120Hz$                | 25°C        | 37    | 42   |       | dB   |
| Dropout Voltage                    | $V_D$             |                                                            | 25°C        |       | 1.7  |       | V    |

**LM79L15** (At specified virtual junction temperature,  $V_{IN} = 23V$ ,  $I_O = 40mA$  (Unless otherwise noted))

| PARAMETER                          | SYMBOL            | TEST CONDITION <sup>(Note 1)</sup>                         |             | MIN.   | TYP. | MAX.   | UNIT |
|------------------------------------|-------------------|------------------------------------------------------------|-------------|--------|------|--------|------|
| Output Voltage <sup>(Note 2)</sup> | $V_{OUT}$         |                                                            | 25°C        | -14.4  | -15  | -15.6  | V    |
|                                    |                   | $1mA \leq I_O \leq 40mA$<br>$-17.5V \leq V_{IN} \leq -30V$ | 0°C ~ 125°C | -14.25 | -15  | -15.75 |      |
|                                    |                   | $1mA \leq I_O \leq 70mA$                                   |             | -14.25 | -15  | -15.75 |      |
| Line Regulation                    | $\Delta V_{LINE}$ | $-17.5V \leq V_{IN} \leq -30V$                             | 25°C        |        | 65   | 300    | mV   |
|                                    |                   | $-27V \leq V_{IN} \leq -30V$                               |             |        | 58   | 250    |      |
| Load Regulation                    | $\Delta V_{LOAD}$ | $1mA \leq I_O \leq 100mA$                                  | 25°C        |        | 25   | 150    | mV   |
|                                    |                   | $1mA \leq I_O \leq 40mA$                                   |             |        | 15   | 75     |      |
| Bias Current                       | $I_B$             |                                                            | 25°C        |        | 4.2  | 6.5    | mA   |
|                                    |                   |                                                            | 125°C       |        |      | 6      |      |
| Bias Current Change                | $\Delta I_B$      | $-20V \leq V_{IN} \leq -30V$                               | 0°C ~ 125°C |        |      | 1.5    | mA   |
|                                    |                   | $1mA \leq I_O \leq 40mA$                                   |             |        |      | 0.1    |      |
| Output Noise Voltage               | $V_N$             | $10Hz \leq f \leq 100kHz$                                  | 25°C        |        | 82   |        | uV   |
| Ripple Rejection                   | RR                | $-18.5V \leq V_{IN} \leq -28.5V$ ,<br>$f=120Hz$            | 25°C        | 37     | 44   |        | dB   |
| Dropout Voltage                    | $V_D$             |                                                            | 25°C        |        | 1.7  |        | V    |

### 3-TERMINAL 0.1A NEGATIVE VOLTAGE REGULATOR

### LM79LXX

**LM79L18** (At specified virtual junction temperature,  $V_{IN} = 26V$ ,  $I_o = 40mA$  (Unless otherwise noted))

| PARAMETER                          | SYMBOL            | TEST CONDITION <sup>(Note 1)</sup>                         |             | MIN.  | TYP. | MAX.  | UNIT |
|------------------------------------|-------------------|------------------------------------------------------------|-------------|-------|------|-------|------|
| Output Voltage <sup>(Note 2)</sup> | $V_{OUT}$         |                                                            | 25°C        | -17.3 | -18  | -18.7 | V    |
|                                    |                   | $1mA \leq I_o \leq 40mA$<br>$-20.5V \leq V_{IN} \leq -33V$ | 0°C ~ 125°C | -17.1 | -18  | -18.9 |      |
|                                    |                   | $1mA \leq I_o \leq 70mA$                                   |             | -17.1 | -18  | -18.9 |      |
| Line Regulation                    | $\Delta V_{LINE}$ | $-20.7V \leq V_{IN} \leq -33V$                             | 25°C        |       | 70   | 360   | mV   |
|                                    |                   | $-21V \leq V_{IN} \leq -33V$                               |             |       | 64   | 300   |      |
| Load Regulation                    | $\Delta V_{LOAD}$ | $1mA \leq I_o \leq 100mA$                                  | 25°C        |       | 27   | 180   | mV   |
|                                    |                   | $1mA \leq I_o \leq 40mA$                                   |             |       | 19   | 90    |      |
| Bias Current                       | $I_B$             |                                                            | 25°C        |       | 4.7  | 6.5   | mA   |
|                                    |                   |                                                            | 125°C       |       |      | 6     |      |
| Bias Current Change                | $\Delta I_B$      | $-21V \leq V_{IN} \leq -33V$                               | 0°C ~ 125°C |       |      | 1.5   | mA   |
|                                    |                   | $1mA \leq I_o \leq 40mA$                                   |             |       |      | 0.1   |      |
| Output Noise Voltage               | $V_N$             | $10Hz \leq f \leq 100kHz$                                  | 25°C        |       | 82   |       | uV   |
| Ripple Rejection                   | RR                | $-23V \leq V_{IN} \leq -33V$ ,<br>$f=120Hz$                | 25°C        | 32    | 36   |       | dB   |
| Dropout Voltage                    | $V_D$             |                                                            | 25°C        |       | 1.7  |       | V    |

**LM79L24** (At specified virtual junction temperature,  $V_{IN} = 32V$ ,  $I_o = 40mA$  (Unless otherwise noted))

| PARAMETER                          | SYMBOL            | TEST CONDITION <sup>(Note 1)</sup>                       |             | MIN.  | TYP. | MAX.  | UNIT |
|------------------------------------|-------------------|----------------------------------------------------------|-------------|-------|------|-------|------|
| Output Voltage <sup>(Note 2)</sup> | $V_{OUT}$         |                                                          | 25°C        | -23   | -24  | -25   | V    |
|                                    |                   | $1mA \leq I_o \leq 40mA$<br>$-27V \leq V_{IN} \leq -38V$ | 0°C ~ 125°C | -22.8 | -24  | -25.2 |      |
|                                    |                   | $1mA \leq I_o \leq 70mA$                                 |             | -22.8 | -24  | -25.2 |      |
| Line Regulation                    | $\Delta V_{LINE}$ | $-27V \leq V_{IN} \leq -38V$                             | 25°C        |       | 95   | 480   | mV   |
|                                    |                   | $-28V \leq V_{IN} \leq -38V$                             |             |       | 78   | 400   |      |
| Load Regulation                    | $\Delta V_{LOAD}$ | $1mA \leq I_o \leq 100mA$                                | 25°C        |       | 41   | 240   | mV   |
|                                    |                   | $1mA \leq I_o \leq 40mA$                                 |             |       | 28   | 120   |      |
| Bias Current                       | $I_B$             |                                                          | 25°C        |       | 4.8  | 6.5   | mA   |
|                                    |                   |                                                          | 125°C       |       |      | 6     |      |
| Bias Current Change                | $\Delta I_B$      | $-21V \leq V_{IN} \leq -38V$                             | 0°C ~ 125°C |       |      | 1.5   | mA   |
|                                    |                   | $1mA \leq I_o \leq 40mA$                                 |             |       |      | 0.1   |      |
| Output Noise Voltage               | $V_N$             | $10Hz \leq f \leq 100kHz$                                | 25°C        |       | 82   |       | uV   |
| Ripple Rejection                   | RR                | $-29V \leq V_{IN} \leq -35V$ ,<br>$f=120Hz$              | 25°C        | 30    | 33   |       | dB   |
| Dropout Voltage                    | $V_D$             |                                                          | 25°C        |       | 1.7  |       | V    |




Note 1. Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into account separately.


All characteristics are measured with a 0.33 $\mu$ F capacitor across the input and a 0.1 $\mu$ F capacitor across the output.

Note 2. This specification applies only for DC power dissipation permitted by absolute maximum ratings.


## TYPICAL OPERATING CHARACTERISTICS

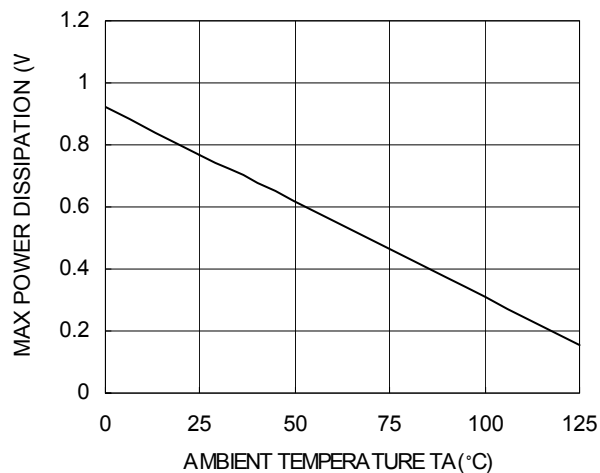


Power Dissipation vs. Ambient Temperature, TO-92

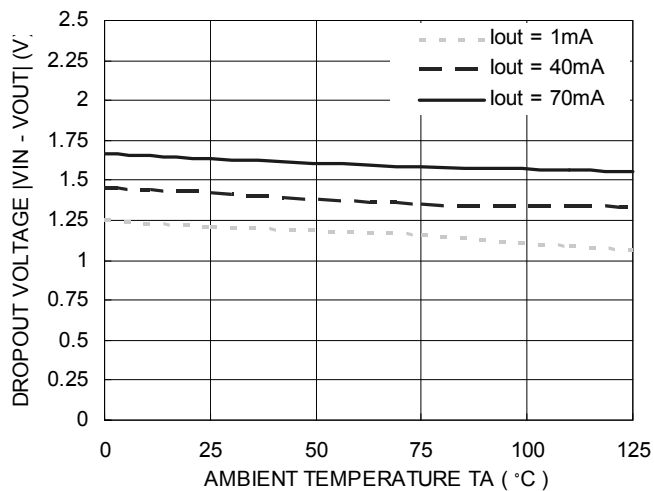


Dropout Voltage vs. Ambient Temperature

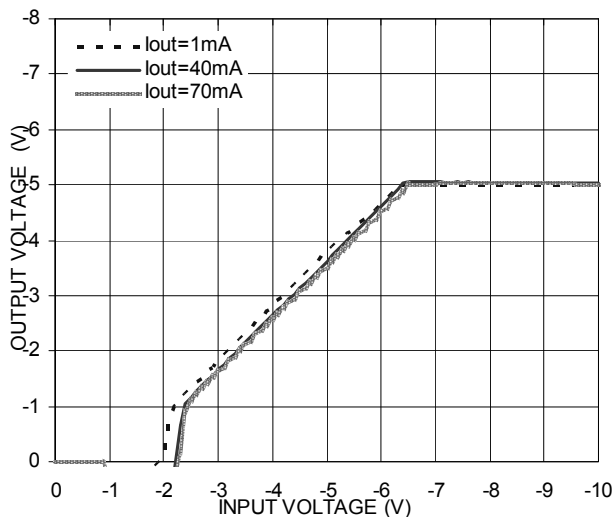

Output Voltage vs. Input Voltage

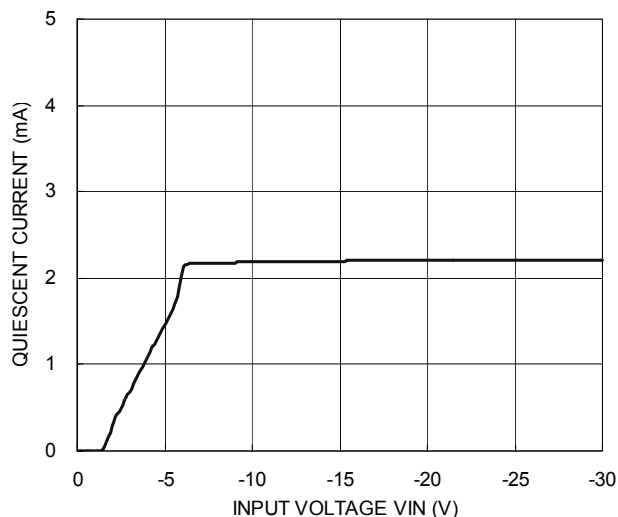

Quiescent Current vs. Input Voltage

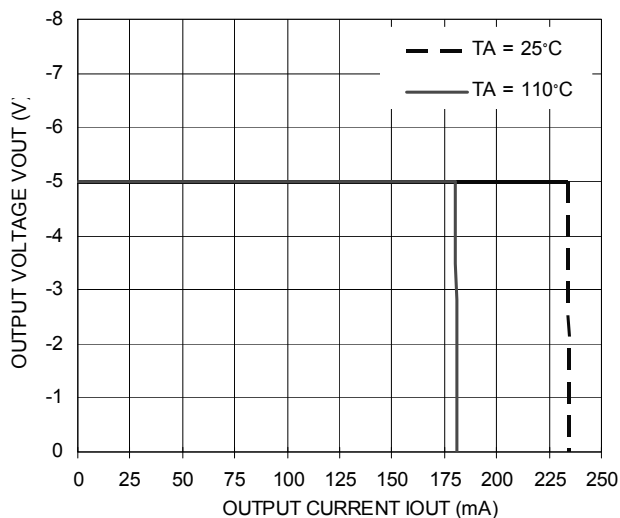

Output Voltage vs. Output Current