
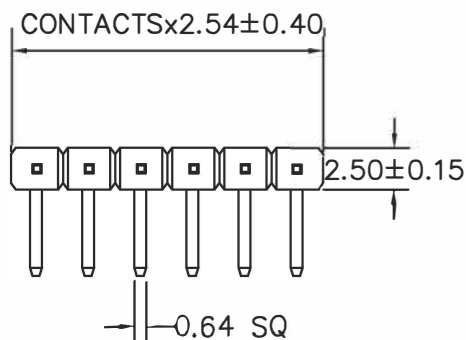
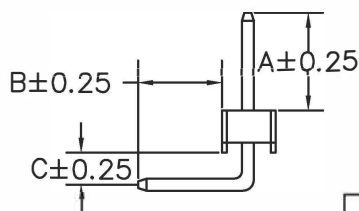


RECOMMENDED P.C.B LAYOUT

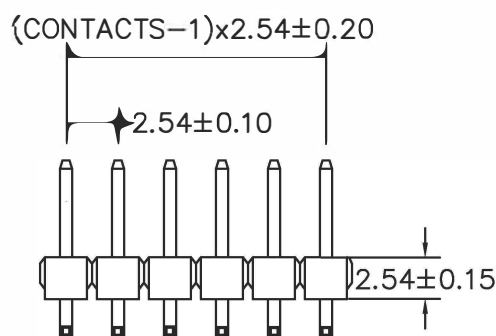

A: 4 mm

B: 6 mm

C: 1 mm

MATERIAL

HOUSING : PBT,UL94V-0
CONTACT : COPPER ALLOYS
PLATED : GOLD-FLASH
COLOR : BLACK

SPECIFICATION

CURRENT: 3A
OPERATING TEMPERATURE: -55°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 1000 MEGAOHMS MIN
WITHSTANDING VOLTAGE : AC 1000V RMS

CONTACTS	
1X2	1X21
1X3	1X22
	1X23
	1X24
1X5	1X25
1X6	1X26
1X7	1X27
1X8	1X28
1X9	1X29
1X10	1X30
1X11	1X31
1X12	1X32
1X13	1X33
1X14	1X34
1X15	1X35
1X16	1X36
1X17	1X37
1X18	1X38
1X19	1X39
1X20	1X40

比例 (SCALE)	FREE	繪圖 (DRAW)	Tina	FLYiNG INTERNATIONAL	
單位 (UNIT)	MM	審核 (CHECK)	/ /		
一般公差 (TOLERANCE)		承認 (AP' E)	/ /	圖名 (NAME) PIN HEADER 2.54 90° H:2.54	
.0±0.38 .00±0.25 ANG=±5°		投影法 PROJECTION	第三角	料號 (PART NO)	P254L130401XXGC
				圖號 (DRAW NO)	1XL