
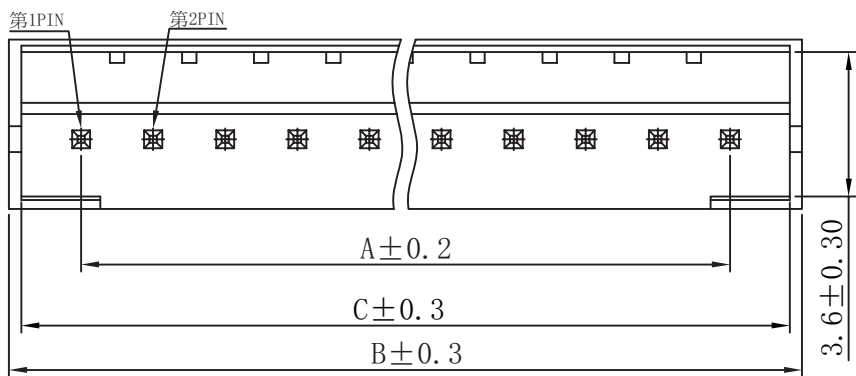
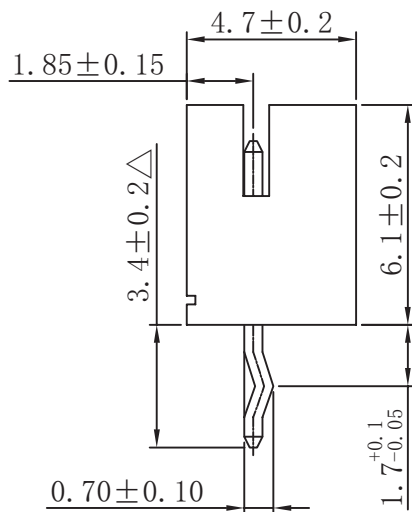


Specificatis

Current Rating	:2A AC, DC
Voltage rating	:100V AC, DC
Temperature range	: -25°C ~ +85°C
Contact resistance	:10mΩ Max
Insulation resistance	:1000MΩ Min
Withstanding voltage	:800 V AC/minute
Pin Material	:Brass
Finished	:Tin-plated
Housing Mateial	:Nylon-66, UL94 V-0
Color	:Ivory-white

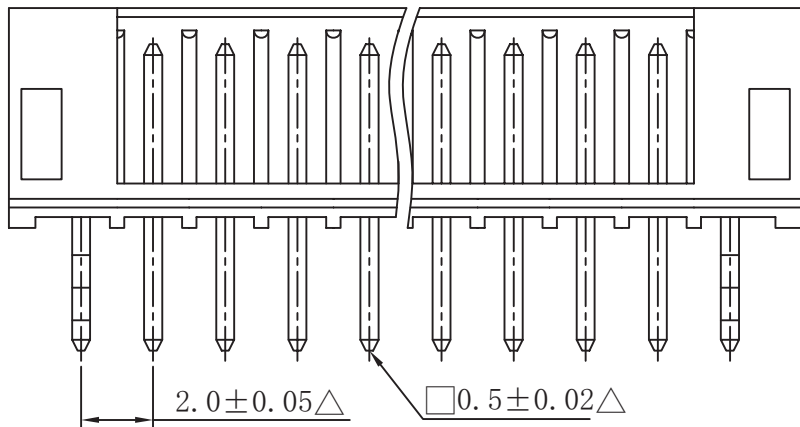

Circuits	Patr NO	Dimension mm		
		A	B	C
2	CP-W20-02	2.00	6.00	4.84
3	CP-W20-03	4.00	8.00	6.84
4	CP-W20-04	6.00	10.00	8.84
5	CP-W20-05	8.00	12.00	10.84
6	CP-W20-06	10.00	14.00	12.84
7	CP-W20-07	12.00	16.00	14.84
8	CP-W20-08	14.00	18.00	16.84
9	CP-W20-09	16.00	20.00	18.84
10	CP-W20-10	18.00	22.00	20.84
11	CP-W20-11	20.00	24.00	22.84
12	CP-W20-12	22.00	26.00	24.84
13	CP-W20-13	24.00	28.00	26.84
14	CP-W20-14	26.00	30.00	28.84
15	CP-W20-15	28.00	32.00	30.84
16	CP-W20-16	30.00	34.00	32.84
17	CP-W20-17	32.00	36.00	34.84
18	CP-W20-18	34.00	38.00	36.84

注:

10PIN(含10PIN)以下需打牙

FLYING
INTERNATIONAL

DESCRIPTION(內容):

2.0mm Wafer 180° □=0.50 打K
(環保材料)

PART NO:
(料號) CP-W20-XX

DWG NO(圖號):

DRAWN(製圖):

王建平

CHECKED(確認):


GENERAL TOLERANCE:
(公差)

.0 ±0.20
.00 ±0.15
.000 ±0.10

APPROVAL(核准):

SCALE(比例):

1:XX



REV:

A/9

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

(1D)增加產品顏色標注

增加Layout尺寸上的公差

增加塑膠內徑尺寸

DATE

2005.08.13

2007.06.26

2009.09.04

2012.10.18

FILE NO: CWJ-4E-09