

NOTES:

1. HOUSING:PBT, UL94V-0

COLOR :BLACK

2. CONTACT:BRASS

PLATED :GOLD FLASH


3. CURRENT : 3A

4. OPERATING TEMPERAURE : -55° C TO +105° C


5. CONTACT RESISTANCE : 20 MILLIOHMS Max.

6. INSULATION RESISTANCE: 1000 MEGAOHMS Min.



7. WITHSTAND VOLTAGE : 1000 V AC/minute

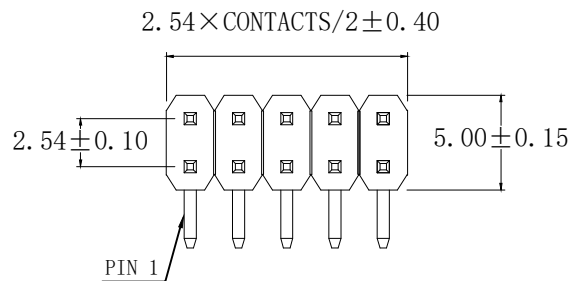8. MAJOR DIMENSION  MUST BE CONTROLLED BY QIP.

2.54 × (CONTACTS/2-1)

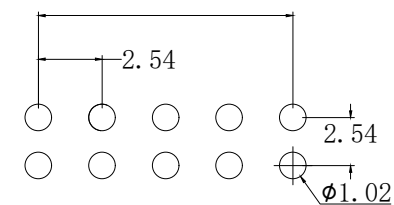

P.C.B. LAYOUT

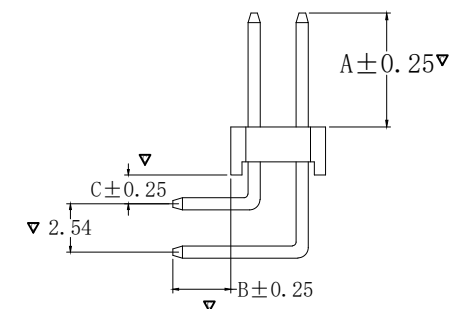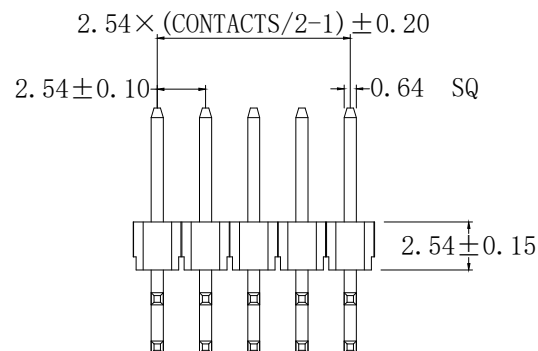


CONTACTS

	2×11	2×21	2×31
2×02	2×12	2×22	2×32
2×03	2×13	2×23	2×33
2×04	2×14	2×24	2×34
2×05	2×15	2×25	2×35
2×06	2×16	2×26	2×36
2×07	2×17	2×27	2×37
2×08	2×18	2×28	2×38
2×09	2×19	2×29	2×39
2×10	2×20	2×30	2×40

A: 6.00 mm

B: 3.00 mm

C: 1.50 mm

比例 (SCALE)	1:1						FLYiNG	
單位 (UNIT)	MM						品名規格 (TITLE)	PIN HEADER 2.54PH 90° H:2.54 2*XXPIN
公差 (TOLERANCE) X. X ±0.38 X. XX ±0.25 X. XXX ±0.05								
投影法 (PROJECTION)		A	2019-09-24	ZENG	LIU	HU	圖號 (DRAW NO.)	
		REV.	DATE	RAWN	CHECKED	APPRDVED		

FLYiNG品名規格 (TITLE)
PIN HEADER
2.54PH 90° H:2.54
2*XXPIN