
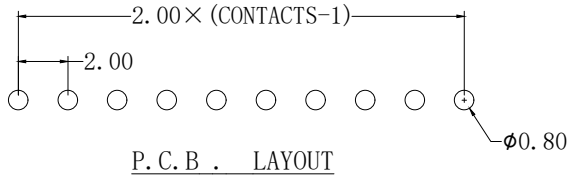
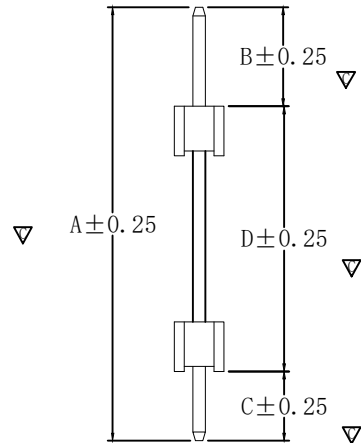
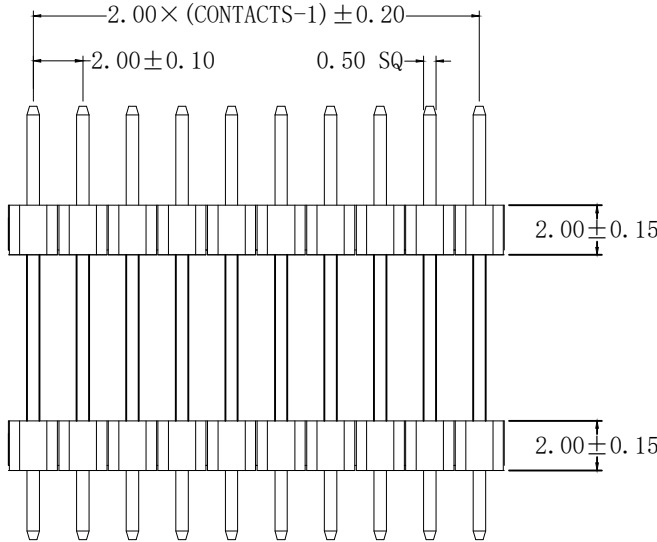


NOTES:
1. HOUSING: NY6T, UL94V-0
COLOR : BLACK
2. CONTACT: BRASS
PLATED : GOLD FLASH
3. CURRENT : 2A
4. OPERATING TEMPERAURE : -55° C TO +105° C
5. CONTACT RESISTANCE : 20 MILLIOHMS Max.
6. INSULATION RESISTANCE: 1000 MEGAOHMS Min.
7. WITHSTAND VOLTAGE : 500 V AC/minute
8. MAJOR DIMENSION ▽ MUST BE CONTROLLED BY QIP.

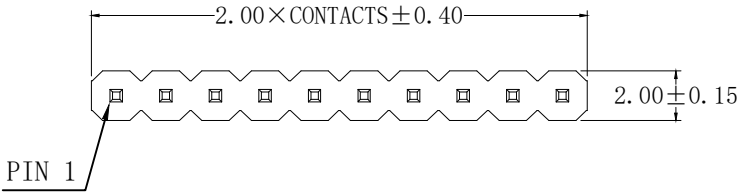

A: 12.00 mm
B: 3.00 mm
C: 3.00 mm
D: 6.00 mm

CONTACTS			
	1×11	1×21	1×31
1×02	1×12	1×22	1×32
1×03	1×13	1×23	1×33
1×04	1×14	1×24	1×34
1×05	1×15	1×25	1×35
1×06	1×16	1×26	1×36
1×07	1×17	1×27	1×37
1×08	1×18	1×28	1×38
1×09	1×19	1×29	1×39
1×10	1×20	1×30	1×40

比列 (SCALE)	1:1					
單位 (UNIT)	MM					
公差 (TOLERANCE) X.X ±0.38 X.XX ±0.25 X.XXX ±0.05						
投影法 (PROJECTION)		A	2020-06-30	Zeng	Liu	Hu
		REV.	DATE	RAWN	CHECKED	APPRDVED

品名規格 (TITLE)

PIN HEADER
2.00PH 雙塑 180° H:2.00
1*XXPIN

圖號 (DRAW NO.)