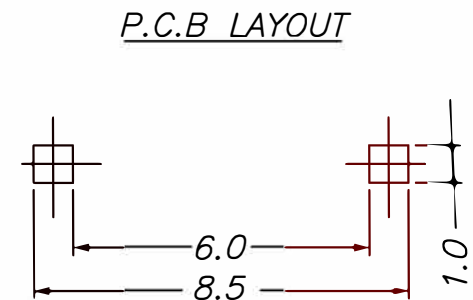

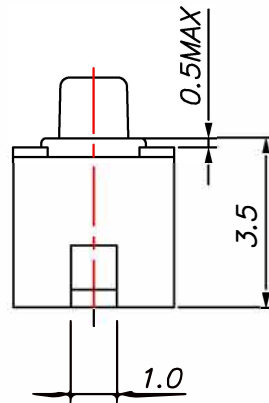
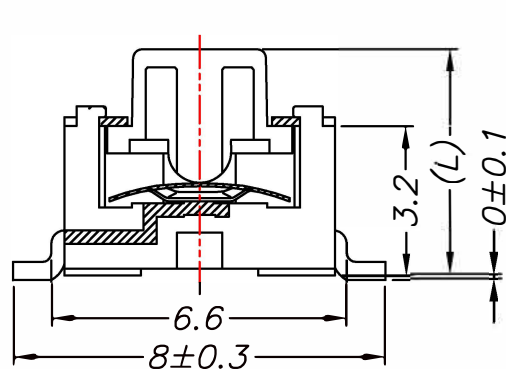


) 6T || ¥ | + ")`-(OF)-(BB)-(RP)-K

	TYPE		2	3
	OPERATING FORCE		160±30gf	250±50gf
Model NO	1101NE	1101NEA	1101NEAA	1101NEC
L(mm)	4.3	5.0	6.0	8.0

RP: REEL PACKAGE

STEM/CASE Color:
B: Black
W: WHITE

1. RATING: DC 12V 50mA
2. CONTACT RESISTANCE: 50mΩ max(initial)
3. INSULATION RESISTANCE: 100mΩ min
4. ELECTRICALLY LIFE: 160gf 50,000 cycles
250gf 30,000 cycles
5. TRAVEL: 0.25±0.1mm

自由公差		
区分	类别	公差
0	<0.5	±0.10
0.50	<5	±0.15
5.0	<10	±0.20
10.0	<20	±0.30
20.0	<50	±0.40
未标注R角		R0.3
未标注角底公差		±2°

NO	NAME	MATERIAL	NATIONALITY	QTY	FINISHING
1	TERMINAL	BRASS	CHINA	1	SILVER PLATING
2	CASE	PPA	CHINA	1	BLACK/WHITE
3	CONTACT	SUS	CHINA	1	Contact side silver plating
4	STEM	PPA	CHINA	1	
5	COVER	SUS	CHINA	1	BLACK/WHITE

www.switch.com.tw

D		單位	比例	日期	核准	審核	設計繪圖	料號	FLY-1101NE(L)-(OF)-(BB)-(RP)-K		頁數	1/1	D
		mm	FREE	2019-12-06	WILLIAM	AMY	EWS	品名	TACT SWITCH				
		FLYiNG 汎翊國際有限公司						圖號	FLY-1101NE(L)-(OF)-(BB)-(RP)-K	版本	B		