

A

B


C

D

E

 $0.7+2.54 \times \text{No. of Positions} \pm 0.3$ $2.54 \times (\text{No. of Contacts} - 1) \pm 0.2$ $2.5 \pm 0.15 \Delta$



第1PIN 第2PIN



P. C. B. Hole Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over

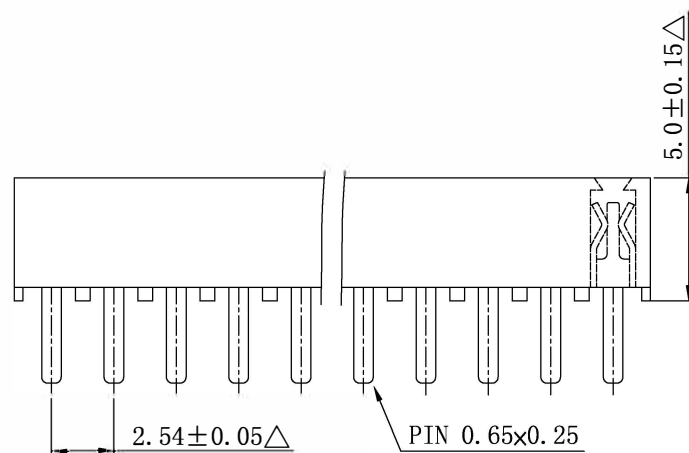

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F194	X	X	X	DXXX	X X
(Female Header Single Row) F194 (2.54 H:5.0 With stand off)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon-6T (Standard: P)	S-D D030 (Standard: S-D030)	(02 TO 40 Contacts)

△ 此符號表示重點管控尺寸

FLYiNG

DESCRIPTION(內容)

2.54mm Female Header H:5.0 W:2.5 180°
(RoHS)PART NO:
(料號)

F194-SG_-D030-XX

DWG NO(圖號):

DRAWN(製圖)
GONGCHECKED(確認):
TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差).X .XXXX
.XX .X°
.XXX .XX°

SCALE(比例):

1:XX

REV:
R2UNIT:
mmSIZE:
A4SHEET:
1/1

REV

R0

R1

R2

R3

DESCRIPTION

舊料號:CCPBA500S01×XX
舊料號:F194-XXSGP-D30

更新料號

變更環保章字樣

DATE

2005.08.13
2005.12.04

2006.07.12

2006.08.15

A

B

C

D

E