



RECOMMENDED P.C.B LAYOUT

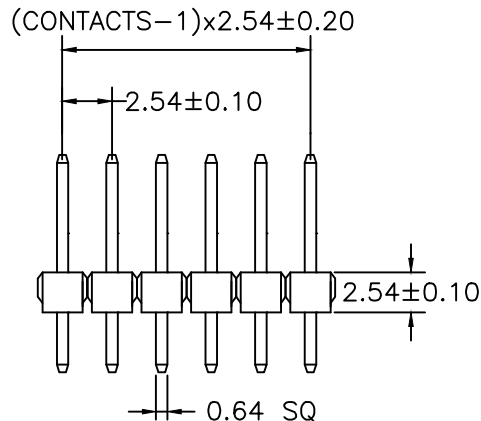

P254S1154O108GC

排針-2.54mm-180度-11.54mm-1\*8PIN PBT  
(塑高=2.54mm 上針=6mm 下針=3mm)

A: 11.54 mm B: 6.00 mm C: 3.00 mm

#### MATERIAL

HOUSING : PBT,UL94V-0

CONTACT : COPPER ALLOYS

PLATED : GOLD FLASH

COLOR : BLACK

#### SPECIFICATION

CURRENT: 3A

OPERATING TEMPERATURE: -55°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE: AC 1000V RMS

| CONTACTS |      |
|----------|------|
| 1X21     | 1X21 |
| 1X22     | 1X22 |
| 1X23     | 1X23 |
| 1X24     | 1X24 |
| 1X25     | 1X25 |
| 1X26     | 1X26 |
| 1X27     | 1X27 |
| 1X28     | 1X28 |
| 1X29     | 1X29 |
| 1X30     | 1X30 |
| 1X31     | 1X31 |
| 1X32     | 1X32 |
| 1X33     | 1X33 |
| 1X34     | 1X34 |
| 1X35     | 1X35 |
| 1X36     | 1X36 |
| 1X37     | 1X37 |
| 1X38     | 1X38 |
| 1X39     | 1X39 |
| 1X40     | 1X40 |

|                                  |      |                   |      |                                         |               |
|----------------------------------|------|-------------------|------|-----------------------------------------|---------------|
| 比例 (SCALE)                       | FREE | 繪圖 (DRAW)         | Tina | <b>FLYING</b><br>INTERNATIONAL          |               |
| 單位 (UNIT)                        | MM   | 審核 (CHECK)        | / /  |                                         |               |
| 一般公差 (TOLERANCE)                 |      | 承認 (AP" E)        | / /  | 圖名 (NAME) : PIN HEADER 2.54 180° H:2.54 |               |
| .0=±0.38<br>.00=±0.25<br>ANG=±5° |      | 投影法<br>PROJECTION | 第三角  | 料號 (PART NO)                            | 111-1341-XX10 |
|                                  |      |                   |      | 圖號 (DRAW NO)                            | 1X            |