
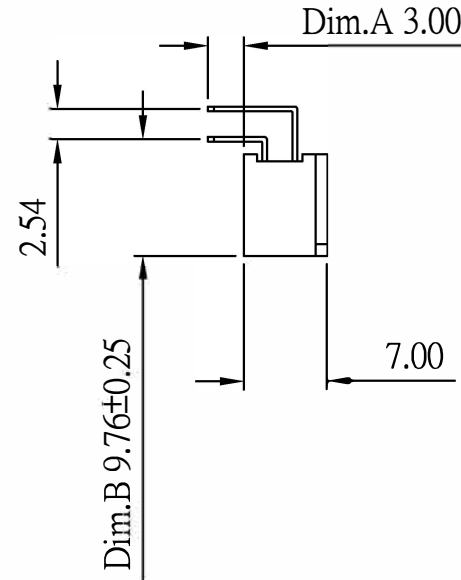
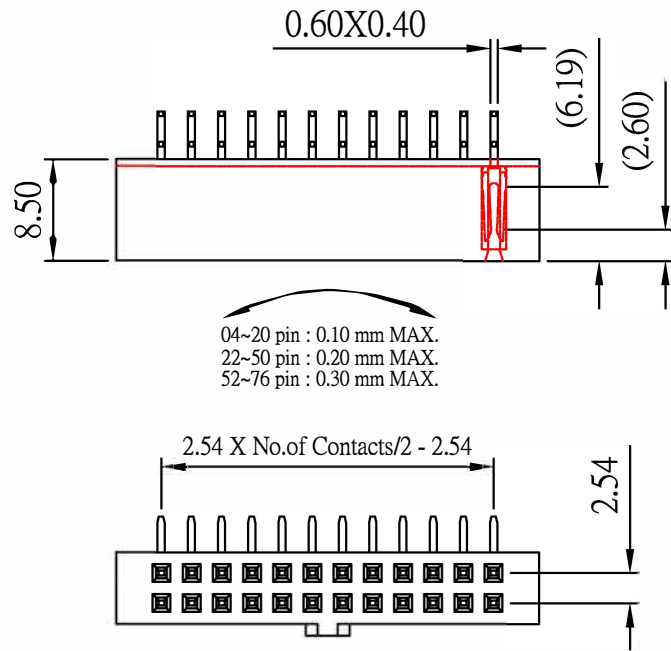
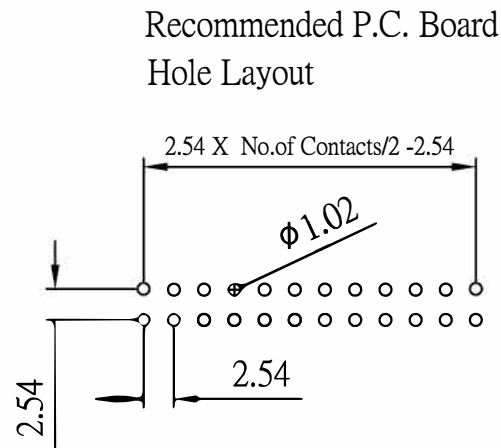


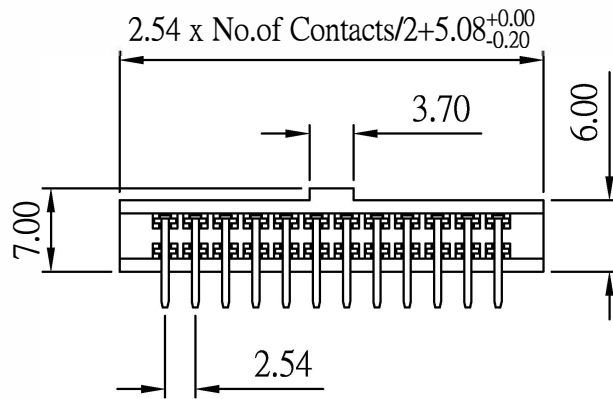

Current Rating Voltage: 3 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max.
 Dielectric Withstanding: 1000 V AC
 Operating Temperature: - 40° ~ +105° C
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: PBT

Finish: Standard: Gold Flash all over
 Insulator Material: High Temperature
 Polyester, UL 94V-0

Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds

(RoHS Compliant)

P1 X 87 P X - 2 XX R0 BK X 003 X
 1 2 3 4 5 6 7 8 9

- Standard: A= P.B.T.
B= Nylon-9T
N= Nylon-6T
- P=With Key
- A=Phosphor Bronze
Blank=Brass
- Per Row 02~38 pin
- Tail Style: R0= Right Angle
- Color: BK=Black
- Contact Plated:
T = Matte Tin over Nickel
W = Matte Tin over Nickel 150u"
Y = Bright Tin over Nickel
C = Gold Flash
F = Gold Flash, Matte Tin 100u"
A = Gold 3u"
B = Gold 3u", Matte Tin 100u"
D = Gold 5u"
- Special Options
E = Gold 5u", Matte Tin 100u"
G = Gold 10u"
J = Gold 10u", Matte Tin 100u"
L = Gold 15u"
M = Gold 15u", Matte Tin 100u"
S = Gold 20u"
R = Gold 20u", Matte Tin 100u"
U = Gold 30u"
V = Gold 30u", Matte Tin 100u"
- Packing:
B= Tube
C= Tray

Enable 3D View

FLYiNG

PART NO	P1X87PX-2XXR0BKX003X		.X ±0.3	.XX ±0.20	.XXX ±0.100
DRAWING NO	PB-00686	EDITION: C	ITEM: PB		
DRAWN BY	Jyun-Hao	2021/10/18	SCALE: 1:1		
APPROVAL BY	Peter pan	2021/10/18	UNIT: m.m		