
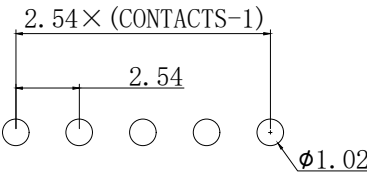
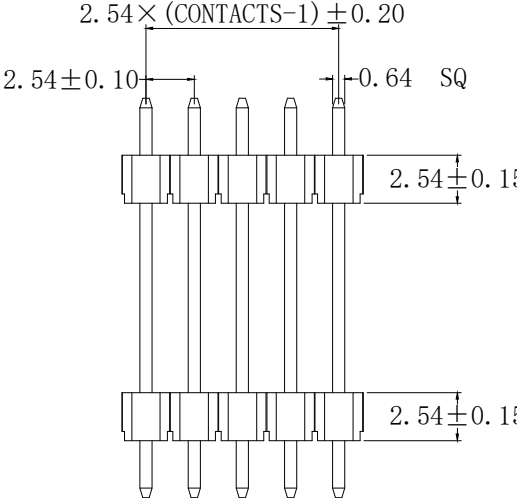
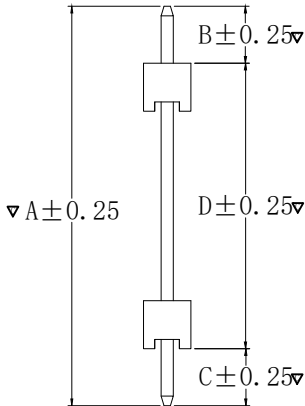






	1	2	3	4	5	6	7	8																		
A	NOTES: 1. HOUSING:PBT, UL94V-0 COLOR :BLACK 2. CONTACT:BRASS PLATED :GOLD FLASH 3. CURRENT : 3A 4. OPERATING TEMPERAURE : -55° C TO +105° C 5. CONTACT RESISTANCE : 20 MILLIOHMS Max. 6. INSULATION RESISTANCE: 1000 MEGAOHMS Min. 7. WITHSTAND VOLTAGE : 1000 V AC/minute 8. MAJOR DIMENSION ▽ MUST BE CONTROLLED BY QIP.																									
B						P.C.B . LAYOUT																				
C																										
D																										
E	CONTACTS					A: 15.50 mm																				
		1×11	1×21	1×31			B: 6.00 mm																			
	1×02	1×12	1×22	1×32			C: 3.00 mm																			
	1×03	1×13	1×23	1×33			D: 6.50 mm																			
	1×04	1×14	1×24	1×34																						
F	1×05	1×15	1×25	1×35	<table><tr><td>比例 (SCALE)</td><td>FREE</td></tr><tr><td>單位 (UNIT)</td><td>MM</td></tr><tr><td colspan="2">公差 (TOLERANCE)</td></tr><tr><td>X. X</td><td>±0.38</td></tr><tr><td>X. XX</td><td>±0.25</td></tr><tr><td>X. XXX</td><td>±0.05</td></tr><tr><td>投影法 (PROJECTION)</td><td></td></tr></table>		比例 (SCALE)	FREE	單位 (UNIT)	MM	公差 (TOLERANCE)		X. X	±0.38	X. XX	±0.25	X. XXX	±0.05	投影法 (PROJECTION)							
	比例 (SCALE)	FREE																								
	單位 (UNIT)	MM																								
	公差 (TOLERANCE)																									
	X. X	±0.38																								
	X. XX	±0.25																								
	X. XXX	±0.05																								
	投影法 (PROJECTION)																									
	1×06	1×16	1×26	1×36																						
	1×07	1×17	1×27	1×37																						
1×08	1×18	1×28	1×38																							
1×09	1×19	1×29	1×39																							
1×10	1×20	1×30	1×40					品名規格 (TITLE)		PIN HEADER 2.54PH 雙塑 180° H:2.54 1*XXPIN																
								圖號 (DRAW NO.)																		