
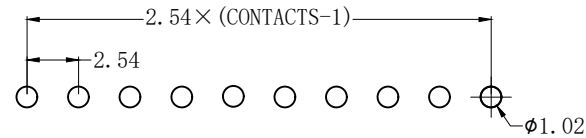

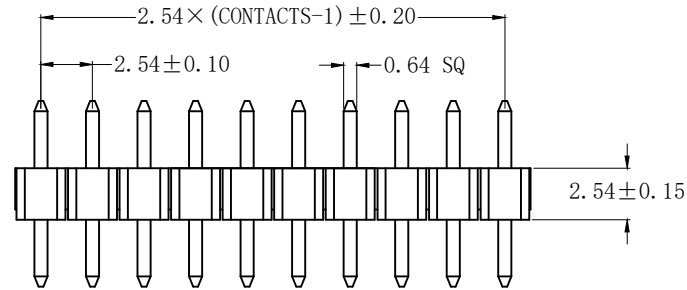


NOTES:

1. HOUSING:PBT, UL94V-0
COLOR :BLACK
2. CONTACT:BRASS
PLATED :GOLD FLASH
3. CURRENT : 3A
4. OPERATING TEMPERAURE : -55° C TO +105° C
5. CONTACT RESISTANCE : 20 MILLIOHMS Max.
6. INSULATION RESISTANCE: 1000 MEGAOHMS Min.
7. WITHSTAND VOLTAGE : 1000 V AC/Minute.
8. MAJOR DIMENSION  MUST BE CONTROLLED BY QIP.

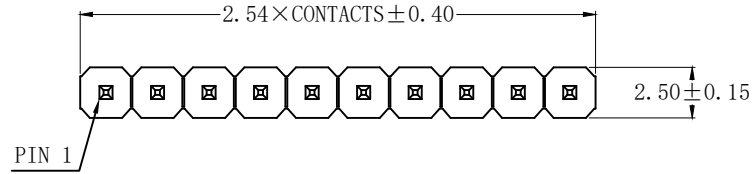


P.C.B . LAYOUT

A: 6.54 mm;
B: 2.00 mm;
C: 2.00 mm

CONTACTS

	1×11	1×21	1×31
1×02	1×12	1×22	1×32
1×03	1×13	1×23	1×33
1×04	1×14	1×24	1×34
1×05	1×15	1×25	1×35
1×06	1×16	1×26	1×36
1×07	1×17	1×27	1×37
1×08	1×18	1×28	1×38
1×09	1×19	1×29	1×39
1×10	1×20	1×30	1×40

比例 (SCALE)		1:1								FLYiNG	
單位 (UNIT)		MM									
公差 (TOLERANCE) X.X ±0.38 X.XX ±0.25 X.XXX ±0.05										品名規格 (TITLE) PIN HEADER 2.54PH 180° H:2.54 1*XXPIN	
投影法 (PROJECTION)				A	2018-12-21	Liu	Hu			圖號 (DRAW NO.)	
				REV.	DATE	RAWN	CHECKED	APPRDVED			