


• DIMENSIONS

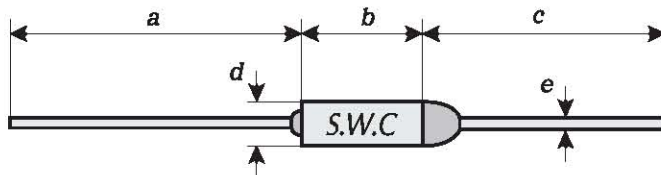

dimension(mm)	a	b	c	d	e
long	35.0±1.0	10.5±0.5	35.0±1.0	4.0±0.05	1.0(18AWG)
short	35.0±1.0	10.5±0.5	20.0±1.0	4.0±0.05	1.0(18AWG)
special	9.0 ~ 64.0	10.5±0.5	9.0 ~ 40.0	4.0±0.05	1.0(18AWG)

• MARKING

Each TCD shall be marked with:

Trade Name : S.W.C

Type No. : SW-1XXT

Ratings : Rated voltage(V), Rated current(A),
Functioning temperature(°C)

Approval Mark

Lot Code

• TEMPERATURE RATINGS

Cat NO.	Tf	Cutoff temperature	Th	Tm	K-mark	UL	C-UL	VDE	TUV	CCC	PSE
SW-102 T	72℃	70℃ +2℃, - 2℃	57 ℃	200℃	●	●	●	●	●	●	●
SW-105 T	77℃	77℃ +0℃, - 4℃	62 ℃	200℃	●	●	●	●	●	●	●
SW-109 T	84℃	84℃ +0℃, - 5℃	69 ℃	180℃	●	●	●	●	●	●	●
SW-152 T	90℃	90℃ +0℃, - 4℃	75 ℃	180℃	●	●	●	●	●	●	●
SW-106 T	91℃	91℃ +0℃, - 4℃	76 ℃	180℃	●	●	●	●	●	●	●
SW-153 T	93℃	93℃ +0℃, - 5℃	78 ℃	180℃	●	●	●	●	●	●	●
SW-104 T	98℃	98℃ +2℃, - 2℃	83 ℃	190℃	●	●	●	●	●	●	●
SW-108 T	100℃	100℃ +0℃, - 5℃	85 ℃	190℃	●	●	●	●	●	●	●
SW-155 T	104℃	104℃ +0℃, - 5℃	89 ℃	190℃	●	●	●	●	●	●	●
SW-110 T	109℃	109℃ +0℃, - 5℃	94 ℃	190℃	●	●	●	●	●	●	●
SW-136 T	110℃	110℃ +0℃, -5℃	95 ℃	190℃	●	●	●	●	●	●	●
SW-119 T	115℃	119℃ +0℃, -5℃	104 ℃	190℃	●	●	●	●	●	●	●
SW-111 T	121℃	121℃ +0℃, - 5℃	106 ℃	200℃	●	●	●	●	●	●	●
SW-115 T	126℃	126℃ +0℃, - 4℃	111 ℃	200℃	●	●	●	●	●	●	●
SW-129 T	128℃	128℃ +0℃, - 5℃	113 ℃	200℃	●	●	●	●	●	●	●
SW-114 T	139℃	139℃ +0℃, - 4℃	124 ℃	200℃	●	●	●	●	●	●	●
SW-130 T	141℃	141℃ +0℃, - 4℃	126 ℃	200℃	●	●	●	●	●	●	●
SW-138 T	144℃	144℃ +0℃, - 5℃	127 ℃	260℃	●	●	●	●	●	●	●
SW-116 T	152℃	152℃ +0℃, - 4℃	137 ℃	270℃	●	●	●	●	●	●	●
SW-120 T	167℃	167℃ +0℃, - 4℃	152 ℃	280℃	●	●	●	●	●	●	●
SW-118 T	169℃	169℃ +0℃, - 5℃	154 ℃	280℃	●	●	●	●	●	●	●
SW-127 T	184℃	184℃ +0℃, - 6℃	169 ℃	220℃	●	●	●	●	●	●	●
SW-122 T	192℃	192℃ +0℃, - 3℃	177 ℃	220℃	●	●	●	●	●	●	●
SW-125 T	195℃	195℃ +0℃, - 6℃	180 ℃	300℃	●	●	●	●	●	●	●
SW-139 T	216℃	216℃ +0℃, - 6℃	200 ℃	370℃	●	●	●	●	●	●	●
SW-124 T	228℃	228℃ +0℃, - 6℃	200 ℃	370℃	●	●	●	●	●	●	●
SW-128 T	240℃	240℃ +0℃, - 6℃	200 ℃	370℃	●	●	●	●	●	●	●

UL file NO : E126429 ● =Approved