

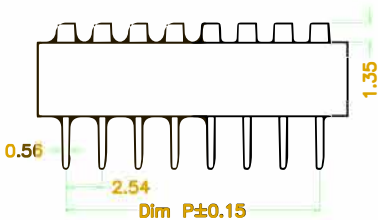

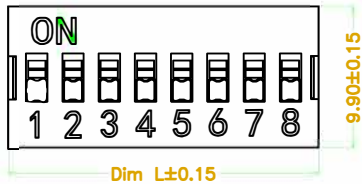


2	1
Rev	Description
	Date
	2021.12.08

Poles	01P	02P	03P	04P	05P	06P	07P	08P	09P	10P	12P
Dim P	---	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	20.86	27.94
Dim L	3.96	6.50	9.04	11.58	14.12	16.66	19.20	21.74	24.28	26.82	31.90

Housing: PBT +30%G.F, UL94V-0
 Contact: Phosphor bronze,Gold plated

Electrical
 Rated voltage: 24V/DC
 Contact Resistance:≤100mΩ
 Rated current: 25mA
 Insulation Resistance:≥100MΩ/DC500V
 Withstanding voltage: 500VAC/1min
 Mechanical & operating ambient
 Operation Temp:-20℃—+85℃
 Mechanical life:2000 operations Min
 Operation force:400gf max.



P.C.B.LAYOUT

SCHEMATIC(TYP.)



(1,2,3,4,5,POS AVAIL)

FLYiNG 汎翊國際有限公司				
Tolerance Angle ± 5° x. ±0.50 x. x ±0.30 x. x. x ±0.10 x° ±1°	Projection	DIP Switch		
		Drawn:	Joey.Lin	P/N: ADS-08P-B(R)
		Checked:	C.L.Jang	File No:
		Approved:	R.X.Lin	Unit: mm. Scale: 1/1. Size: A4.