



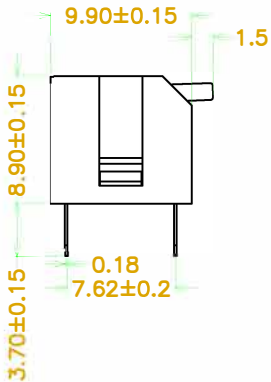
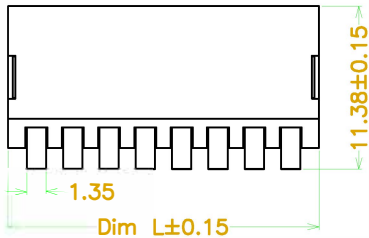


Poles	01P	02P	03P	04P	05P	06P	07P	08P	09P	10P	12P
Dim P	—	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	20.86	27.94
Dim L	3.96	6.50	9.04	11.58	14.12	16.66	19.20	21.74	24.28	26.82	31.90

Rev	Description	Date
		2021.12.08



SCHEMATIC(TYP.)



Housing: PBT +30%G.F, UL94V-0
 Contact: Phosphor bronze,Gold plated

Electrical
 Rated voltage: 24V/DC
 Contact Resistance:≤100mΩ
 Rated current: 25mA
 Insulation Resistance:≥100MΩ/DC500V
 Withstanding voltage: 500VAC/1min
 Mechanical & operating ambient
 Operation Temp:-20℃—+85℃
 Mechanical life:2000 operations Min
 Operation force:400gf max.

FLYiNG 汎翊國際有限公司

Tolerance	Projection	DIP Switch		
Angle ± 5°		Drawn:	Joey.Lin	P/N: ADS-08PR-B(R)
x. ±0.50		Checked:	C.L.Jang	File No:
x. x ±0.30		Approved:	R.X.Lin	Unit: mm. Scale: 1/1. Size: A4.
x. x. x ±0.10				
x° ±1°				