



A

B

C

D

E

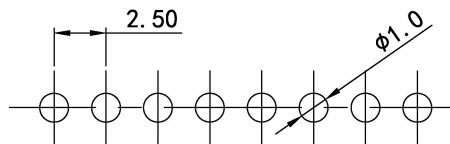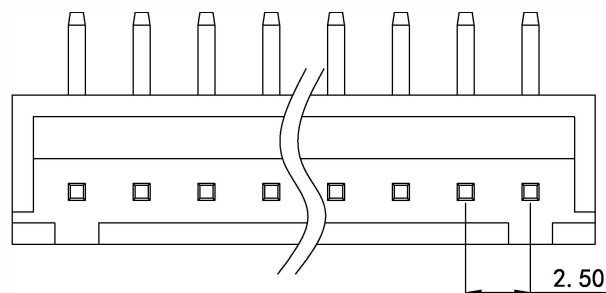

RECOMMENDED P.C.BOARD HOLE DIMM.

SPECIFICATIONS

Current Rating: 3A AC, DC

Voltage Rating: 250V AC Maximum




Operating Temp: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Terminal Material: Brass/Tin-plated

Material: Nylon 66, UL94V-0

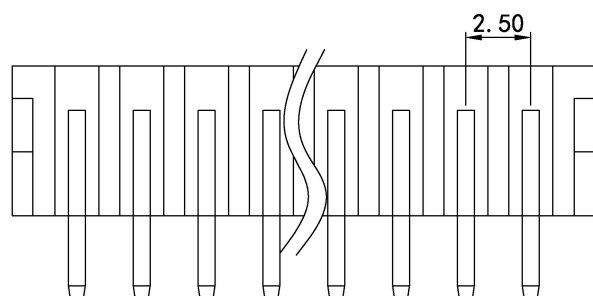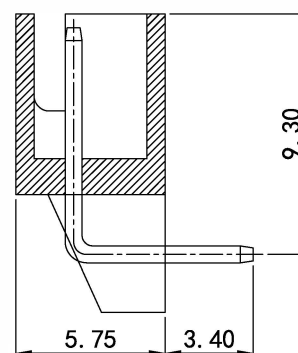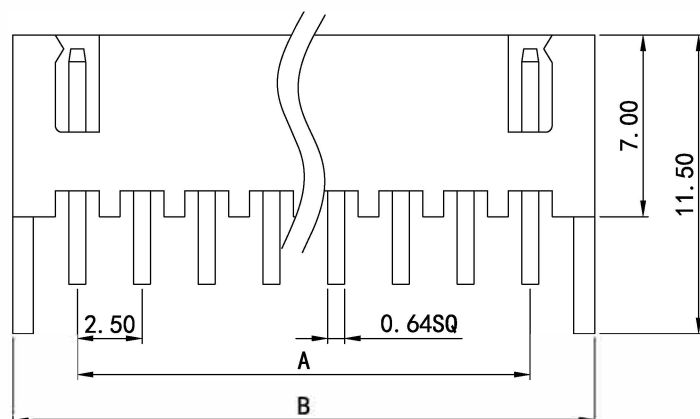

PART NO.	COLOR
CX-W250R-XX	WHITE
CX-W250R-XXB	BLACK
CX-W250R-XXBL	BLUE
CX-W250R-XXR	RED
CX-W250R-XXY	YELLOW

Poles	Dimension mm (in.)		Note.
	A	B	
02	2.50 (0.098)	7.50 (0.295)	
03	5.00 (0.197)	10.00 (0.394)	
04	7.50 (0.295)	12.50 (0.492)	
05	10.00 (0.394)	15.00 (0.591)	
06	12.50 (0.492)	17.50 (0.689)	
07	15.00 (0.591)	20.00 (0.787)	
08	17.50 (0.689)	22.50 (0.886)	
09	20.00 (0.787)	25.00 (0.984)	
10	22.50 (0.886)	27.50 (1.082)	
11	25.00 (0.984)	30.00 (1.181)	
12	27.50 (1.082)	32.50 (1.280)	
13	30.00 (1.181)	35.00 (1.378)	
14	32.50 (1.280)	37.50 (1.476)	
15	35.00 (1.378)	40.00 (1.575)	
16	37.50 (1.476)	42.50 (1.673)	

FLYiNG

DESCRIPTION(内容):

2.5mm Wire-to-Board Header
DIP 90° Type(RoHS)

PART NO:
(料 號) CX-W250R-XX

DWG NO(圖號): 2501J-XX-RT

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

X.XX ± 0.25

X.X ± 0.35

SCALE(比例):

FREE



REV:

R4

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

R4

DESCRIPTION

RELEASE

2007年圖面版本更新

追加COLOR(BROWN) & 變更圖號, 公差

取消(BROWN)PART NO. 補充(YELLOW)PART NO

17pin以上停產

2014年8月料號P數編碼統一兩碼

DATE

2005.12.01

2007.07.16

2007.10.12

2010.10.27

2016.03.14

A

B

C

D

E