

CRYSTAL UNITS SPECIFICATION

Product Type : RESONATOR

Model : ZTA4.00M

Description : RESONATOR 4.000 MHz MG 2PIN 藍色

P/N : DZ04000000MHZ

SPEC No. : 1 – 200423 – DZ04000000MHZ



DATE : 23-Apr-20

Designer : *Aaron Lee*

Checked By : *Tom*

Approved By : *Sam*

REVISION HISTORY

Rev	Revise Page	Revise Contents	Date	Ref. No.	Reviser
A	N/A	Initial Release	23-Apr-20	N/A	Aaron Lee

1. SCOPE

This specification shall cover the characteristics of the ceramic Resonator with 4.00MHz for the clock oscillation of microprocessor Etc.

2. SPECIFICATION NO :

3. PART NO.

PART NUMBER	CUSTOMER PART NO	SPECIFICATION NO
ZTA4.00M		

4. ELECTRICAL SPECIFICATION

No	Item	Requirements
4.1	Oscillation Frequency (Fosc)	4.00MHz $\pm$ 0.5%
4.2	Resonant Impedance (Ro)	30 Ω max
4.3	Temperature Coefficient of Oscillation Frequency	$\pm$ 0.3% max (-20 $^{\circ}$ C to +8 $^{\circ}$ C)
4.4	Withstanding Voltage	100 VDC 5 sec.max
4.5	Rating Voltage (1) D.C. Voltage (2) A.C. Voltage	6 V.D.C. 15 Vpp.
4.6	Insulation Resistance	100M Ω min. (at 10 VDC)
4.7	Operating Temperature	-20 $^{\circ}$ C to +80 $^{\circ}$ C
4.8	Storage Temperature	-55 $^{\circ}$ C to +85 $^{\circ}$ C
4.9	Aging Rate (Fosc)	$\pm$ 0.3% max (10 year)

5. MEASUREMENT

5.1 Measurement Condition


The reference temperature shall be 25 $^{\circ}$ C $\pm$ 2 $^{\circ}$ C. The measurement shall be performed at the temperature range of 5 $^{\circ}$ C to 35 $^{\circ}$ C Unless otherwise the result is doubtful.

5.2 Measurement Circuit and Equipment

Oscillating frequency shall be measured by the standard test Circuit.


HP8751A Network shall measure resonant impedance Analyzer.

5.3 MEASUREMENT CIRCUIT

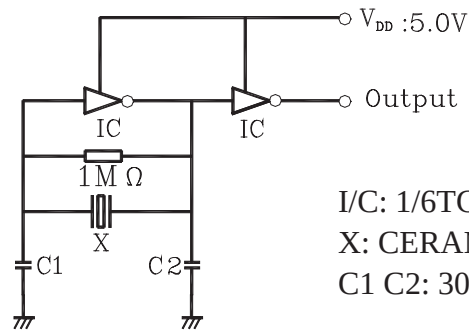

I/C: 1/6TC4069UBP×2
 X: CERAMIC RESONATOR
 C1 C2: 30PF

6.0 DIMENSIONS

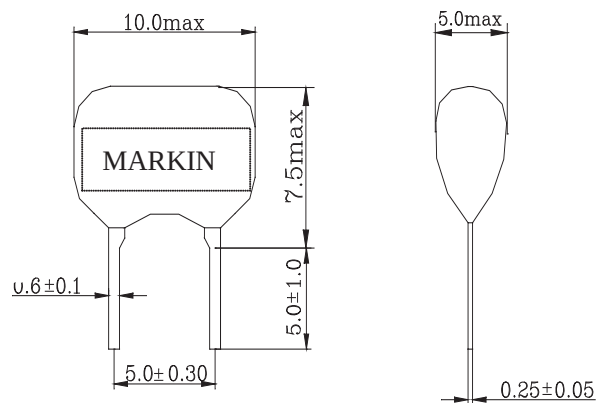

7. PHYSICAL AND ENVIRONMENTAL CHARACTERISTICS

No	Item	Condition of Test	Performance Requirements
7.1	Humidity	Keep the resonator at 40 ± 2 °C and 90-95% RH for 96 ± 4 hours. Then release the resonator into the room condition for 1 hour prior to the measurement.	It shall fulfill the specifications in Table 1.
7.2	Vibration	Subject the resonator to vibration for 2 hours each in x,y and z axis with the amplitude of 1.5mm, the frequency shall be varied uniformly between the limits of 10—55Hz	It shall fulfill the specifications in Table 1.
7.3	Mechanical Shock	Drop the resonator randomly onto a concrete floor from the height of 100 cm 3 times.	It shall fulfill the specifications in Table 1.
7.4	Resistance to Solder Heat	Dip the resonator terminals no closer than 2 mm into the solder bath 260 ± 5 °C for 10 ± 1 sec.	It shall fulfill the specifications in Table 1.
7.5	Solder ability	Dip the resonator terminals no closer than 2	More than 95% of the

		mm into the solder bath at 235±5 °C for 2±0.5 sec.	terminal surface of the resonator shall be covered with fresh solder.
7.6	High Temperature Exposure	Subject the resonator to 80±5 °C for hours. Then release the resonator into the room conditions for 1 hour prior to the measurement.	It shall fulfill the specifications in Table 1.
7.7	Low Temperature	Subject the resonator to -40±5 °C for hours. Then release the resonator into the room conditions for 1 hour prior to the measurement.	It shall fulfill the specifications in Table 1.
7.8	Temperature Cycling	Subject the resonator to -40 °C for 30 min. followed by a high temperature of 80 °C for 30 min. Cycling shall be repeated 5 times with a transfer time of 15 sec. at the room condition. Then release the resonator into the room temperature for 1 hour prior to the measurement.	It shall fulfill the specifications in Table 1.

7. PHYSICAL AND ENVIRONMENTAL CHARACTERISTICS

(Continued from the preceding page)

No	Item	Condition of Test	Performance Requirements
7.9	Lead Fatigue (1) Pulling Test	Weight along with the direction of terminals without any shock 0.5 kg for 10±1 sec.	The resonator shall show no evidence of damage and shall fulfill all the initial electric characteristics.
	(2) Bending Test	Lead shall be subject to withstand against 90 degree bending at its stem. This operation shall be done towards both directions.	

TABLE1

Item	Specification
Oscillation Frequency Change	$\Delta F/F_{osc} \leq 0.3\%$
Resonant Impedance	$\Delta R_o \leq 5 \Omega$