

## NOTES:

1. HOUSING: NY6T, UL-94V0

COLOR : BLACK

2. CONTACT: PHOSPHOR BRONZ

PLATED : GOLD FLASH

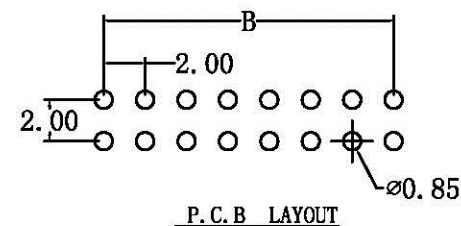
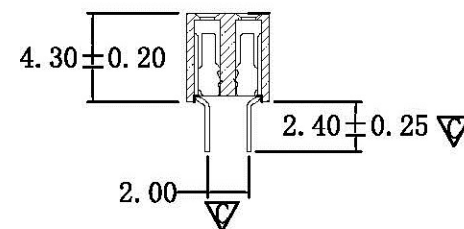
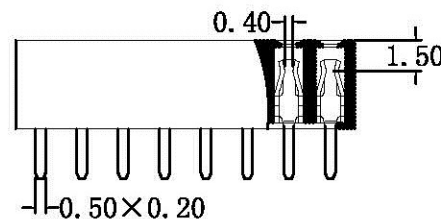
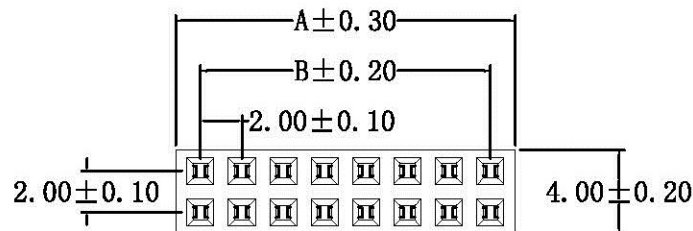
3. CURRENT : 2A

4. OPERATING TEMPERAURE : -55° C TO +105° C

5. CONTACT RESISTANCE : 20 MILLIOHMS MAX

6. INSULATION RESISTANCE: 1000 MEGAOHMS MIN

7. WITHSTAND VOLTAGE : 500 V AC MIN

8. MAJOR DIMENSION  $\nabla$  MUST BE CONTROLLED BY QIP.

| Number<br>Of Position | DIMENSIONS |       | Number<br>Of Position | DIMENSIONS |       |
|-----------------------|------------|-------|-----------------------|------------|-------|
|                       | A          | B     |                       | A          | B     |
|                       |            |       | 42                    | 42.40      | 40.00 |
| 04                    | 04.40      | 02.00 | 44                    | 44.40      | 42.00 |
| 06                    | 06.40      | 04.00 | 46                    | 46.40      | 44.00 |
| 08                    | 08.40      | 06.00 | 48                    | 48.40      | 46.00 |
| 10                    | 10.40      | 08.00 | 50                    | 50.40      | 48.00 |
| 12                    | 12.40      | 10.00 | 52                    | 52.40      | 50.00 |
| 14                    | 14.40      | 12.00 | 54                    | 54.40      | 52.00 |
| 16                    | 16.40      | 14.00 | 56                    | 56.40      | 54.00 |
| 18                    | 18.40      | 16.00 | 58                    | 58.40      | 56.00 |
| 20                    | 20.40      | 18.00 | 60                    | 60.40      | 58.00 |
| 22                    | 22.40      | 20.00 | 62                    | 62.40      | 60.00 |
| 24                    | 24.40      | 22.00 | 64                    | 64.40      | 62.00 |
| 26                    | 26.40      | 24.00 | 66                    | 66.40      | 64.00 |
| 28                    | 28.40      | 26.00 | 68                    | 68.40      | 66.00 |
| 30                    | 30.40      | 28.00 | 70                    | 70.40      | 68.00 |
| 32                    | 32.40      | 30.00 | 72                    | 72.40      | 70.00 |
| 34                    | 34.40      | 32.00 | 74                    | 74.40      | 72.00 |
| 36                    | 36.40      | 34.00 | 76                    | 76.40      | 74.00 |
| 38                    | 38.40      | 36.00 | 78                    | 78.40      | 76.00 |
| 40                    | 40.40      | 38.00 | 80                    | 80.40      | 78.00 |

|                                                          |     |                     |                                                                                       |                         |                                           |
|----------------------------------------------------------|-----|---------------------|---------------------------------------------------------------------------------------|-------------------------|-------------------------------------------|
| 比例 (SCALE)                                               | 1:1 | 繪圖 (DRAW)           | liu                                                                                   | FLYiNG<br>INTERNATIONAL |                                           |
| 單位 (UNIT)                                                | MM  | 審核 (CHECK)          | Hu                                                                                    |                         |                                           |
| 公差 (TOLERANCE)<br>X.X ±0.38<br>X.XX ±0.25<br>X.XXX ±0.05 |     | 承認 (AP"E)           |                                                                                       | 品名規格<br>(TITLE)         | FEMLE HEADER<br>2.00PH H: 4.30<br>180° 雙排 |
|                                                          |     | 日期 (DATE)           | 2018-11-30                                                                            |                         |                                           |
|                                                          |     | 投影法<br>(PROJECTION) |  | 圖號 (DRAW NO.)           |                                           |