
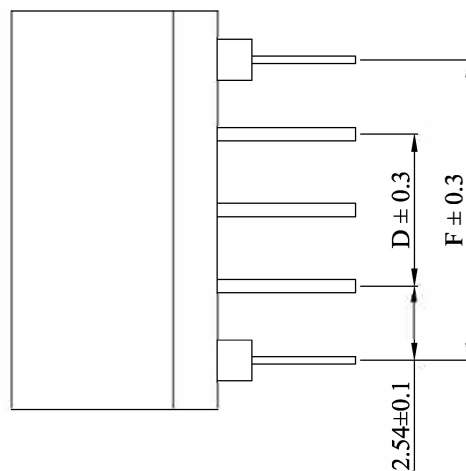



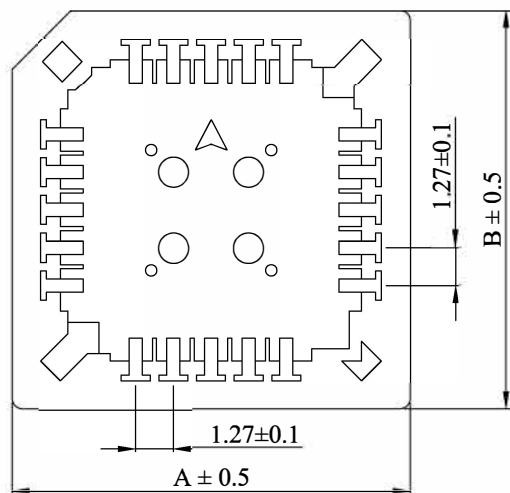


SPECIFICATION

- * Current Rating:1A
- * Withstanding Voltage:600VAC(1min.)
- * Insulation Resistance:1000MΩ minimum
- * Contact Resistance:30mΩ maximum
- * Operating Temperature:
-55° C to +105°C

MATERIAL

- * Contact:Phosphor Bronze
- * Insulator:PPS
- * Plating:Tin

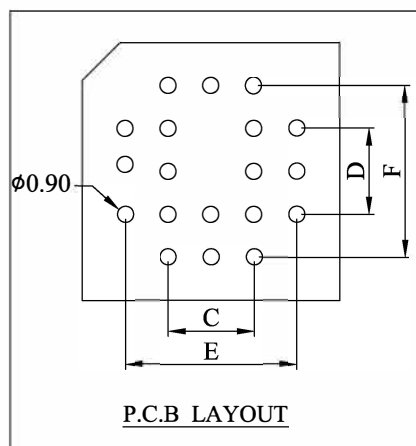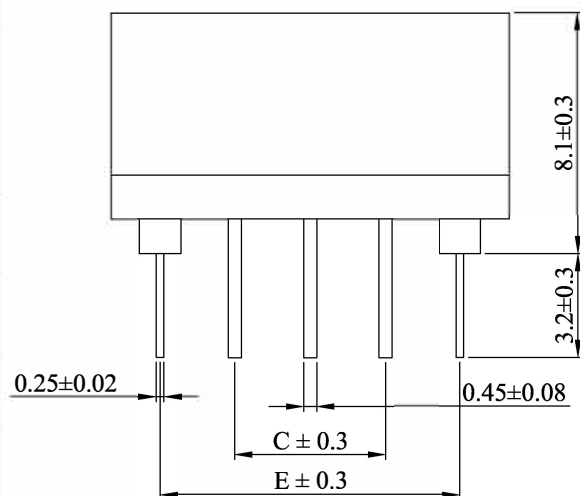

POS	A	B	C	D	E	F
CPLC0020D-PPS	15.40	15.40	5.08	5.08	10.16	10.16
CPLC0028D-PPS	17.94	17.94	7.62	7.62	12.70	12.70
CPLC0032D-PPS	17.94	20.48	7.62	10.16	12.70	15.24
CPLC0044D-PPS	23.38	23.28	12.70	12.70	17.78	17.78
CPLC0052D-PPS	25.92	25.92	15.24	15.24	20.32	20.32
CPLC0068D-PPS	31.00	31.00	20.32	20.32	25.40	25.40
CPLC0084D-PPS	36.08	36.08	25.40	25.40	30.48	30.48

FLYiNG

DESCRIPTION(内容):

2.54mm Center Surface Mount Chip Carrier
Socket DIP(RoHS)

PART NO:
(料 號) CPLC00XXD-PPS

DWG NO(圖號): PLCC-1-0-XXS-T

DRAWN(製圖):

KAY

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

.X .XXXX
.XX .X °
.XXX .XX °

SCALE(比例):

1:XX



REV:

R3

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

環保料

系列料號改成獨立料號

2011年12月塑色棕→黑(自然替換)

DATE

2005.12.08

2006.07.06

2007.04.18

2011.12.13