
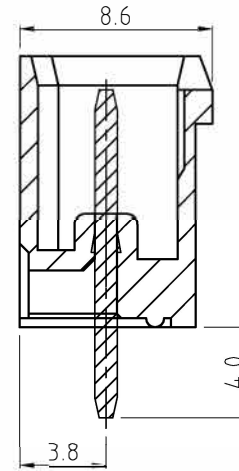


SIGN	DESCRIPTION	DATE	APPROVER

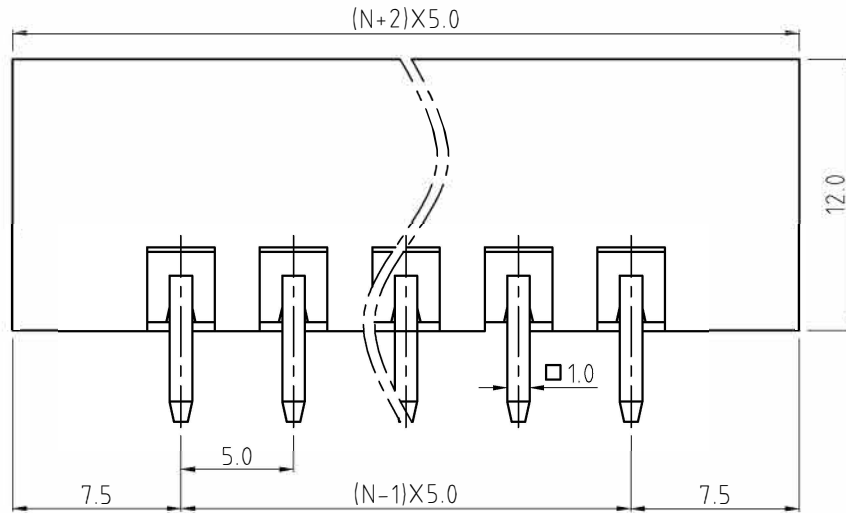

Technical Data:

Material:

Solder Pin: Copper Alloy, Tin plated

Metal nut: Copper Alloy

Insulator body(housing): Polyamide
(Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 16A

Withstanding Voltage: AC 2500V(1min)

Mechanical:

Using temperature Range: -40°C to +105°C



Soldering temperature: +250°C, 5seconds Max.

Ordering Information:

F85-6-5 XX-0 0 0 X 0 0 0 0

02	2Pin	5	Green
To	To	6	Blue
24	24Pin	A	Black

N=Number of contacts

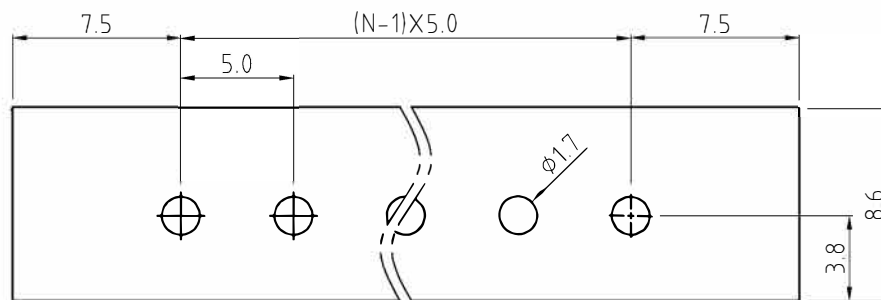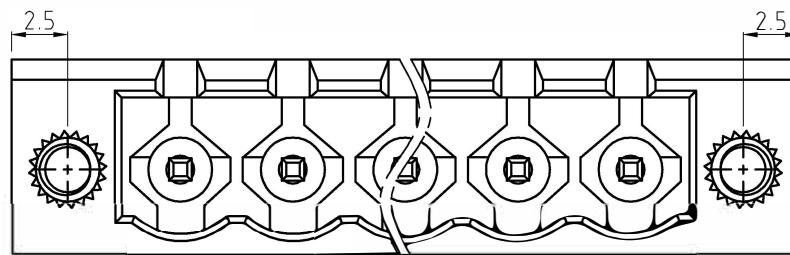

P.C.B. LAYOUT

FLYiNG 汎翊國際有限公司

TOLERANCE	APPROVED:	NAME: F85-6 Pitch 5.0mm
X. ±0.50	CHECKED:	- Series
X.X ±0.30	DRAWN: YangMing 2012,06,20	PART NO: F8565XX000X0000
X.XX ±0.20	UNITS: mm	DWG NO: 9F8565001A
X° ±1°	REV: A	
SCALE: 4 / 1	PAGE: 1 / 1	