

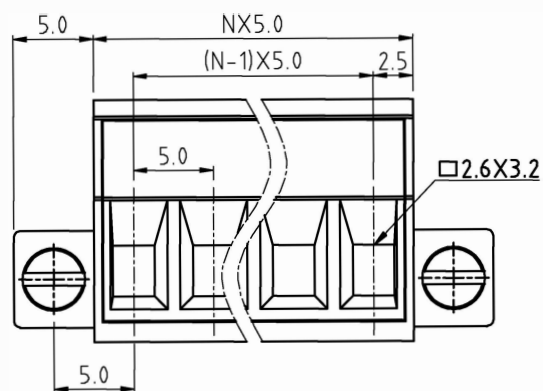


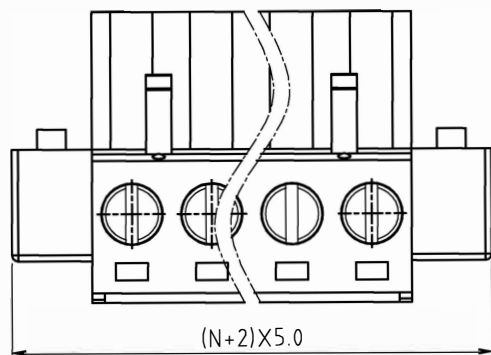

N=Number of contacts

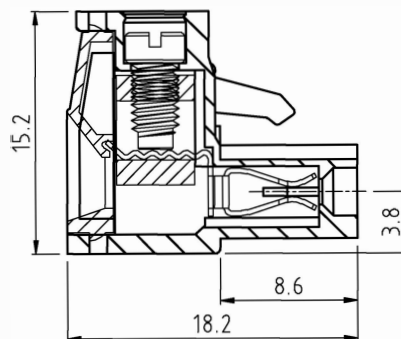

SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:

Material:

Contact(metal housing): Copper Alloy with Ni plated

Terminal screw: Steel galvanized with Cr3+ plated

Wire guard: Copper Alloy, Tin plated.

Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 16 Amps/way max

Contact resistance: 20mΩ(max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 12-26AWG

Mechanical:

Torque: 5.0kgf.cm/M3

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

F75-6-5 XX-X 0 0 X 0 0 0 0

5 Green
 6 Blue
 8 Grey
 A Black
 1 "-" SCREW
 2 "-/+ SCREW

FLYiNG 汎翊國際有限公司

TOLERANCE	APPROVED:	NAME: F75-6 Pitch 5.0mm
X. ±0.50	CHECKED:	Auricled Series
X. X ±0.30	DRAWN: Yang Ming 2011.09.26	
X.XX ±0.20	UNITS: mm	PART NO: F7565XX100X0000
X° ±1°	REV: A	DWG NO: 9F7565001A
	SCALE: 3 / 1	PAGE: 1 / 1