

AB1S THRU AB7S



SINGLE PHASE 0.8 AMP SURFACE MOUNT BRIDGE RECTIFIERS



FEATURES

- * Ideal for printed circuit board
- * Reliable low cost construction utilizing molded plastic technique
- * High surge current capability
- * Polarity: Symbol molded on body
- * Mounting position: Any


VOLTAGE RANGE

50 to 1000 Volts

CURRENT

0.8 Ampere

ABS

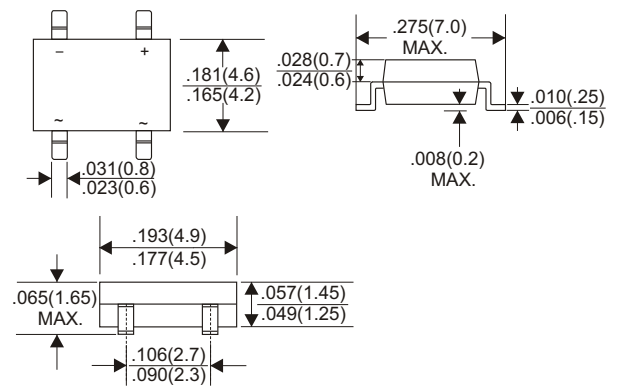

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	AB1S	AB2S	AB3S	AB4S	AB5S	AB6S	AB7S	UNITS
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current								
at Ta=40°C								A
- on glass-epoxy P.C.B. (Note 1)								A
- on aluminum substrate (Note 2)								A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)								A
Maximum Forward Voltage Drop per Bridge Element at 0.4A D.C.								V
Maximum DC Reverse Current Ta=25°C								μA
at Rated DC Blocking Voltage Ta=125°C								μA
Typical Thermal Resistance RθJA (Note 3)								°C/W
Operating Temperature Range, Tj								°C
Storage Temperature Range, Tstg								°C

- NOTES: 1. On glass-epoxy P.C.B. mounted on 0.05 X 0.05"(1.27 X 1.27mm) soldering pads.
2. On aluminum substrate P.C.B. with an area of 0.8 X 0.8 X 0.25" (20 X 20 X 6.4mm) mounted on 0.05 X 0.05"(1.27 X 1.27mm) soldering pads.
3. Thermal Resistance Junction to Ambient.

RATING AND CHARACTERISTIC CURVES (AB1S THRU AB7S)

FIG.1-TYPICAL FORWARD CURRENT
DERATING CURVE

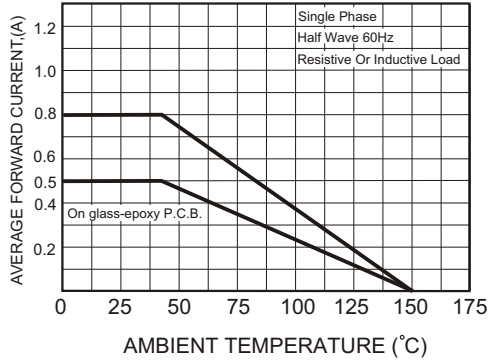


FIG.2-MAXIMUM NON-REPETITIVE FORWARD
SURGE CURRENT

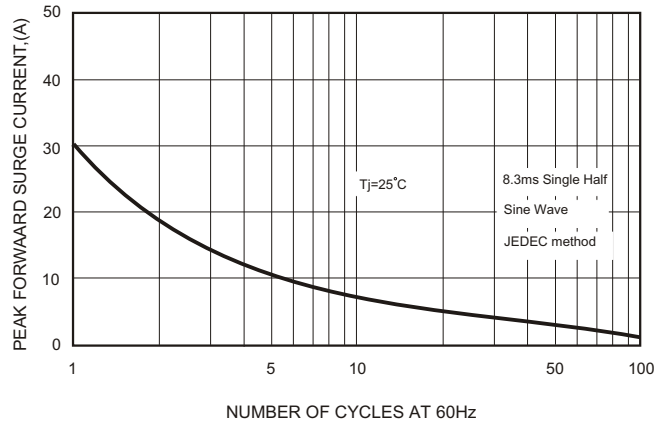


FIG.3-TYPICAL FORWARD
CHARACTERISTICS

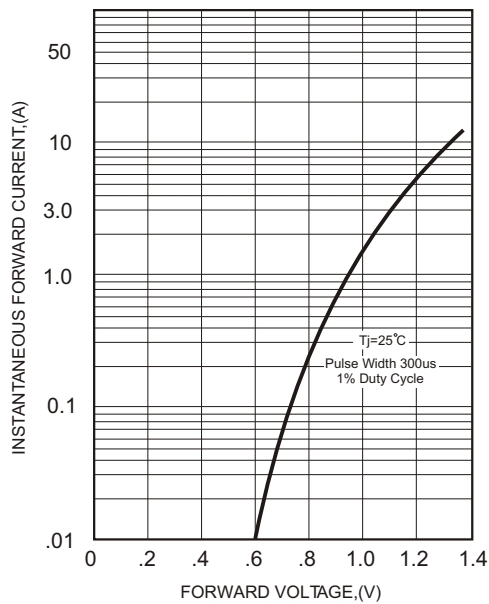


FIG.4-TYPICAL REVERSE
CHARACTERISTICS

