
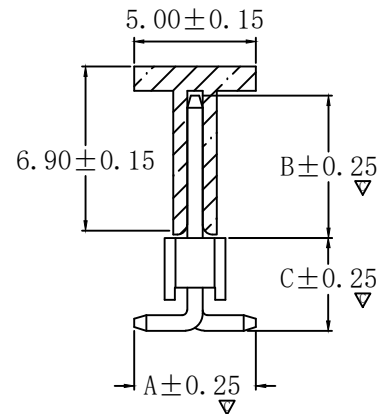
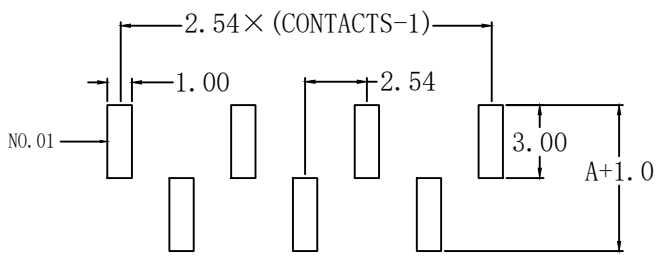
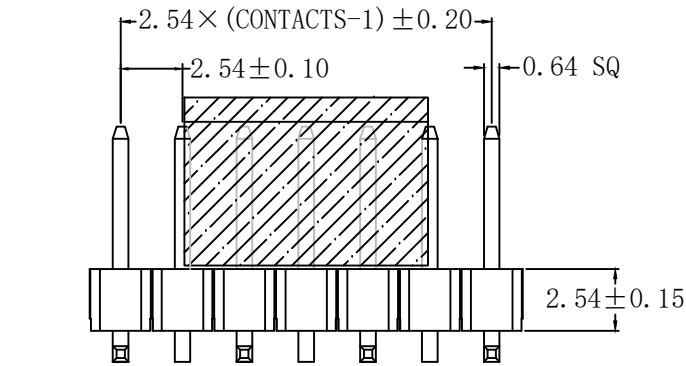



- NOTES:
1. HOUSING: NY6T, UL94V-0
CAP : NY6T, UL94V-0
COLOR : BLACK
 2. CONTACT: BRASS
PLATED : GOLD FLASH
 3. CURRENT : 3A
 4. OPERATING TEMPERAURE : -55° C TO +105° C
 5. CONTACT RESISTANCE : 20 MILLIOHMS Max.
 6. INSULATION RESISTANCE: 1000 MEGAOHMS Min.
 7. WITHSTAND VOLTAGE : 1000 V AC/minute
 8. MAJOR DIMENSION  MUST BE CONTROLLED BY QIP.

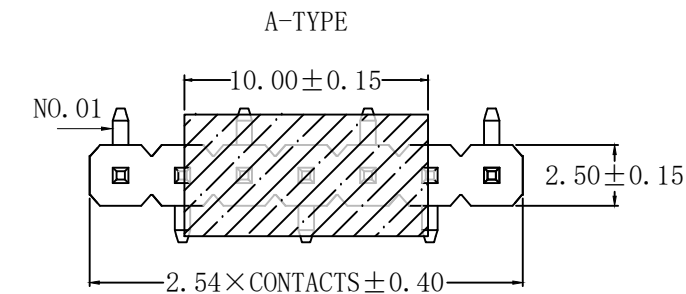

A: 5.00 mm
B: 5.84 mm
C: 3.54 mm

P. C. B. LAYOUT (A-TYPE)

CONTACTS			
	1 × 11	1 × 21	1 × 31
1 × 02	1 × 12	1 × 22	1 × 32
1 × 03	1 × 13	1 × 23	1 × 33
1 × 04	1 × 14	1 × 24	1 × 34
1 × 05	1 × 15	1 × 25	1 × 35
1 × 06	1 × 16	1 × 26	1 × 36
1 × 07	1 × 17	1 × 27	1 × 37
1 × 08	1 × 18	1 × 28	1 × 38
1 × 09	1 × 19	1 × 29	1 × 39
1 × 10	1 × 20	1 × 30	1 × 40

比例 (SCALE)	1:1					
單位 (UNIT)	MM					
公差 (TOLERANCE)						
X. X ±0.38						
X. XX ±0.25						
X. XXX ±0.05						
投影法 (PROJECTION)		A	2020-02-17	Zeng	Liu	Hu
		REV.	DATE	RAWN	CHECKED	APPRDVED



品名規格 (TITLE)

PIN HEADER
2.54PH SMT+CAP H:2.54
1*XXPIN A-TYPE
CAP (L10.0×W5.0×H6.9)

圖號 (DRAW NO.)