




A

B





C

D

E

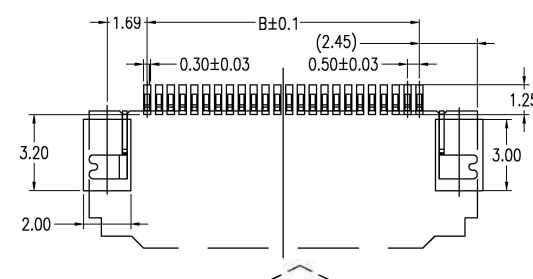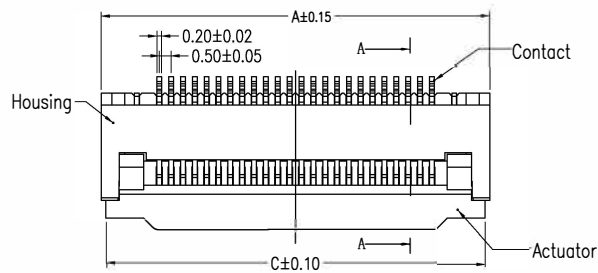

FPC/FFC Insert Direction
Recommended P.C.B Layout

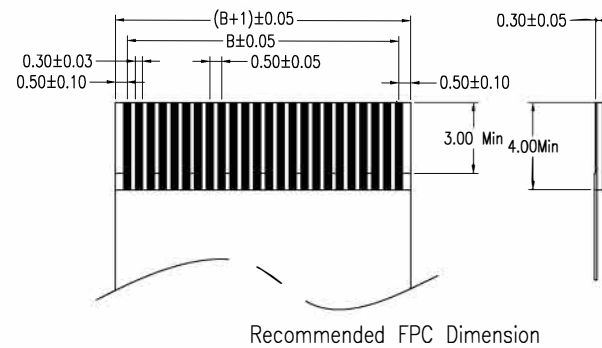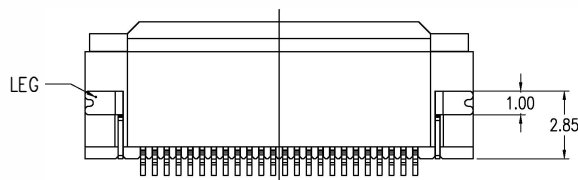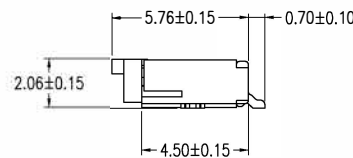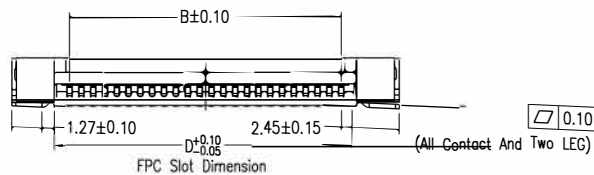

Note:

1.Material

1.1: Housing: LCP UL94-V0 Color:Natural.

1.2: Actuator: LCP UL94-V0 Color:Black.

1.3: Contact: Phosphor Bronze.

1.4: LEG: Brass.

2.Plating

2.1: Contact: Matte Tin Or Gold Plating Nickel Overall .

2.2: LEG: Matte Tin Plating Over Nickel.

3.Rating:

3.1: Operating Voltage: 50V AC/DC.

3.2: Current Rating: 0.4A AC/DC.

3.3: Operating Temperature:-25°C~+85°C.

4.Part Number:

FPC320F0 XX-C X X

NO. of contacts

T: Tube

R: Reel

T: Tin plating

G: Gold plating



PIN	A	B	C	D	PIN	A	B	C	D
4	6.40	1.50	6.00	2.60	41	24.90	20.00	24.50	21.10
5	6.90	2.00	6.50	3.10	42	25.40	20.50	25.00	21.60
6	7.40	2.50	7.00	3.60	43	25.90	21.00	25.50	22.10
7	7.90	3.00	7.50	4.10	44	26.40	21.50	26.00	22.60
8	8.40	3.50	8.00	4.60	45	26.90	22.00	26.50	23.10
9	8.90	4.00	8.50	5.10	46	27.40	22.50	27.00	23.60
10	9.40	4.50	9.00	5.60	47	27.90	23.00	27.50	24.10
11	9.90	5.00	9.50	6.10	48	28.40	23.50	28.00	24.60
12	10.40	5.50	10.00	6.60	49	28.90	24.00	28.50	25.10
13	10.90	6.00	10.50	7.10	50	29.40	24.50	29.00	25.60
14	11.40	6.50	11.00	7.60	51	29.90	25.00	29.50	26.10
15	11.90	7.00	11.50	8.10	52	30.40	25.50	30.00	26.60
16	12.40	7.50	12.00	8.60	53	30.90	26.00	30.50	27.10
17	12.90	8.00	12.50	9.10	54	31.40	26.50	31.00	27.60
18	13.40	8.50	13.00	9.60	55	31.90	27.00	31.50	28.10
19	13.90	9.00	13.50	10.10	56	32.40	27.50	32.00	28.60
20	14.40	9.50	14.00	10.60	57	32.90	28.00	32.50	29.10
21	14.90	10.00	14.50	11.10	58	33.40	28.50	33.00	29.60
22	15.40	10.50	15.00	11.60	59	33.90	29.00	33.50	30.10
23	15.90	11.00	15.50	12.10	60	34.40	29.50	34.00	30.60
24	16.40	11.50	16.00	12.60	61	34.90	30.00	34.50	31.10
25	16.90	12.00	16.50	13.10	62	35.40	30.50	35.00	31.60
26	17.40	12.50	17.00	13.60	63	35.90	31.00	35.50	32.10
27	17.90	13.00	17.50	14.10	64	36.40	31.50	36.00	32.60
28	18.40	13.50	18.00	14.60	65	36.90	32.00	36.50	33.10
29	18.90	14.00	18.50	15.10	66	37.40	32.50	37.00	33.60
30	19.40	14.50	19.00	15.60	67	37.90	33.00	37.50	34.10
31	19.90	15.00	19.50	16.10	68	38.40	33.50	38.00	34.60
32	20.40	15.50	20.00	16.60	69	38.90	34.00	38.50	35.10
33	20.90	16.00	20.50	17.10	70	39.40	34.50	39.00	35.60
34	21.40	16.50	21.00	17.60	71	39.90	35.00	39.50	36.10
35	21.90	17.00	21.50	18.10	72	40.40	35.50	40.00	36.60
36	22.40	17.50	22.00	18.60	73	40.90	36.00	40.50	37.10
36	22.40	17.50	22.00	18.60	74	41.40	36.50	41.00	37.60
36	22.40	17.50	22.00	18.60	75	41.90	37.00	41.50	38.10
37	22.90	18.00	22.50	19.10	76	42.40	37.50	42.00	38.60
38	23.40	18.50	23.00	19.60	77	42.90	38.00	42.50	39.10
39	23.90	19.00	23.50	20.10	78	43.40	38.50	43.00	39.60
40	24.40	19.50	24.00	20.60	79	43.90	39.00	43.50	40.10
					80	44.40	39.50	44.00	40.60

FLYING
INTERNATIONAL

DESCRIPTION(内容):

FPC0.5mm H:2.0 ZIF
掀盖式 下接(RoHS)

PART NO:
(料 號) FPC320F0XX-CXX

DWG NO(圖號): FPC0521-XXRL-TAX

DRAWN(製圖):

Larry

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)

.X ±0.25
.XX ±0.20

SCALE(比例):

FREE

REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

替換料號(原:FPC-KJ0521 XXTRX)

DATE

2011.08.30

2013.10.22