
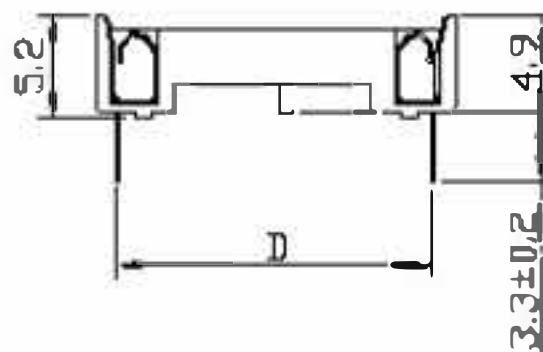
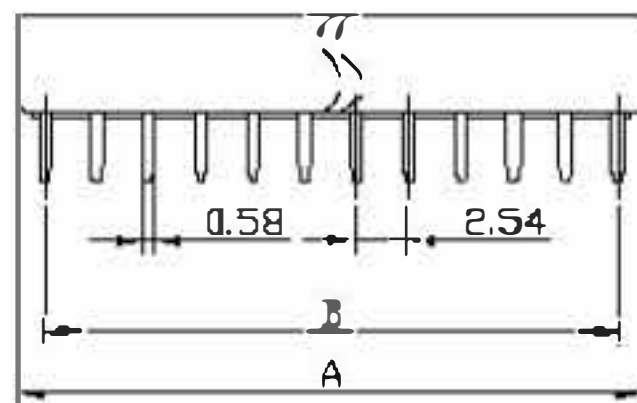


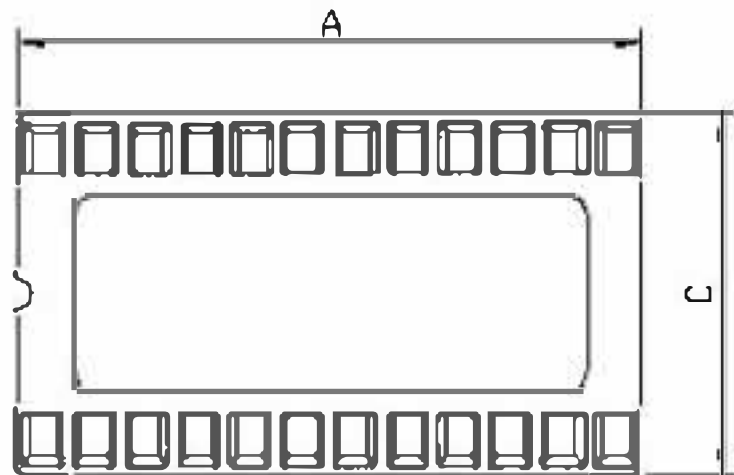

LTR.	REV.	RECORD	DATE
A			
B			
C			

MATERIAL :

INSULATOR : PBT + THERMOPLASTIC,30% Glass
FILLED,UL 94V-0 RATED

CONTACT MATERIAL : PHOSPHOR BRONZE

ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 1AMPS

DIELECTRIC WITHSTANDING VOLTAGE: 750V AC MIN.

CONTACT RESISTANCE : 30 MILLIOHMS MAX.

INSULATION RESISTANCE : 1000 MEGAOHMS MIN.

TEMPERATURE RATING : -55°C--+105°C

A176042	42	53.34	50.8	17.6	15.24
A176040	40	50.8	48.26		
A176032	32	40.64	38.1		
A176028	28	35.56	33.02		
A176024	24	30.48	27.94		

A173032	32	40.64	38.1	9.96	7.62
A173028	28	35.56	33.02		
A173024	24	30.48	27.94		
A173022	22	27.94	25.4		
A173020	20	25.4	22.86		
A173018	18	22.86	20.32		
A173016	16	20.32	17.78		
A173014	14	17.78	15.24		
A173008	8	10.16	7.62		
A173006	6	7.62	5.08		

PART NO	PINS NO. OF	A	B	C	D
DIMENSIONS: (UNIT:mm±0.2)					

FLYiNG

DESCRIPTION IC SOCKET SERIES

DWG.NO. A170000

AUTHORITY	SIGNATURE	DATE	UNIT: mm	TOLERANCE UNLESS OTHERWISE SPECIFIED			
DWN.	JAY	2002.11.20		LINEAR	xx±0.3 xx±0.2 xxx±0.1		
CHK.	ALEX	2002.11.20					
APVD.	JACKY	2002.11.20		ANGLES	±3°		
DWG KIND:		CUSTOMER	REV.	A 0	SCALE	1:1	SHEET 1 OF 1