
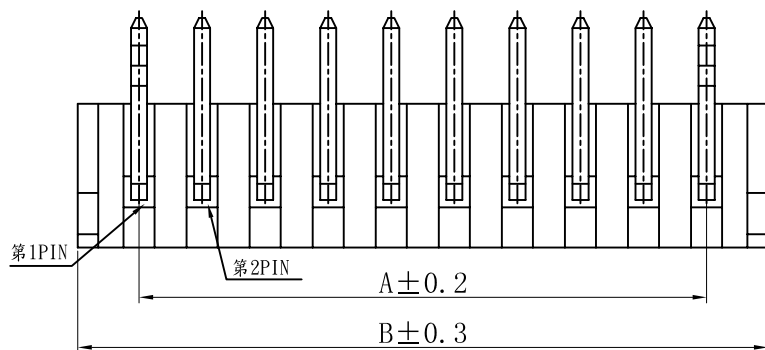
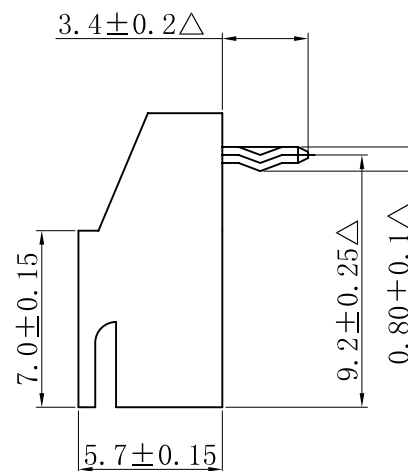


SPECIFICATIONS
Current rating :3A AC, DC
Voltage rating :250V AC, DC
Temperature range : -25°C ~ +85°C
Contact resistance :10mΩMax
Insulation resistance :1000MΩMin
Withstanding voltage :1000 V AC/minute
Finished :Tin-plated
Housing Material :Nylon-66, UL94 V-0
Color :Ivory-white

P.C.B. Hole Layout

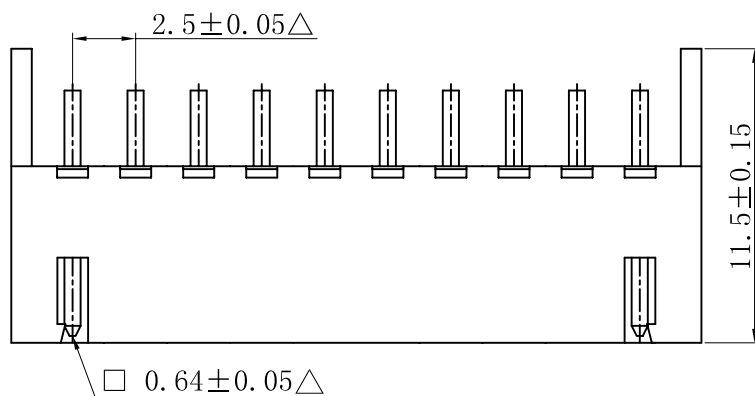

Circuits	Part NO.	Dimension mm	
		A	B
02	CX-W2501R-02	2.50	7.60
03	CX-W2501R-03	5.00	10.10
04	CX-W2501R-04	7.50	12.60
05	CX-W2501R-05	10.00	15.10
06	CX-W2501R-06	12.50	17.60
07	CX-W2501R-07	15.00	20.10
08	CX-W2501R-08	17.50	22.60
09	CX-W2501R-09	20.00	25.10
10	CX-W2501R-10	22.50	27.60
11	CX-W2501R-11	25.00	30.10
12	CX-W2501R-12	27.50	32.60
13	CX-W2501R-13	30.00	35.10
14	CX-W2501R-14	32.50	37.60
15	CX-W2501R-15	35.00	40.10
16	CX-W2501R-16	37.50	42.60
17	CX-W2501R-17	40.00	45.10
18	CX-W2501R-18	42.50	47.60
19	CX-W2501R-19	45.00	50.10
20	CX-W2501R-20	47.50	52.60

FLYING
INTERNATIONAL

DESCRIPTION(內容):
2.5mm Wafer 90° □=0.64 打K
(環保材料)

PART NO:
(料 號) CX-W2501R-XX

DWG NO(圖號):

DRAWN(製圖):
陳雙軍

CHECKED(確認):
鄧文廣

APPROVAL(核准):
師會營

GENERAL TOLERANCE:
(公差)

.0 ±0.20
.00 ±0.15
.000 ±0.10

SCALE(比例):

1:XX



REV:
A/6

UNIT:
mm

SIZE:
A4

SHEET:
X/X

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

變更塑膠高度

料號由CX-W2501R-XX更改為CX-W250R1-XX

料號由CX-W250R1-XX更改為CX-W2501R-XX

DATE

2006.01.05

2007.04.13

2007.05.06

2008.09.17