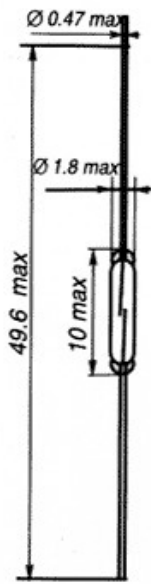


規 格 書
SPECIFICATIONS

Part #	MKA-10110
Dimensions Units: mm  	
Contact form	1A
Contact Position	SYM
Contact Material	Ru
Max. Contact Rating	10 W
Max. Switching Voltage	100 VDC
Max. Switching Current	0.5 A
Max. Initial Contact Resistance	100 mΩ
Pull In Value (AT)	10-35
Min. Drop out (AT)	4
Min. Breakdown Voltage	150 VDC
Max. Contact Capacitance	0.5 pf
Min. Insulation Resistance	$10^9 \Omega$
Typ. Resonant Frequency	5 KHz
Electrical Life (Resistive loads)	5×10^6 (5VDC,10mA) 10^5 (24vdc,250mA)
Test Coil: Number of turns	5,000
Resistance	580Ω
UL file #	