



UT9435H


Power MOSFET

P-CHANNEL ENHANCEMENT MODE

DESCRIPTION

The UTC **UT9435H** provide excellent $R_{DS(ON)}$, low gate charge and fast switching speed. It has been optimized for power management applications.


SYMBOL




ORDERING INFORMATION

Ordering Number		Package	Pin Assignment								Packing
Lead Free	Halogen Free		1	2	3	4	5	6	7	8	
UT9435HL-AA3-R	UT9435HG-AA3-R	SOT-223	G	D	S	-	-	-	-	-	Tape Reel
UT9435HL-S08-R	UT9435HG-S08-R	SOP-8	S	S	S	G	D	D	D	D	Tape Reel
UT9435HL-S08-T	UT9435HG-S08-T	SOP-8	S	S	S	G	D	D	D	D	Tube
UT9435HL-AE3-R	UT9435HG-AE3-R	SOT-23	S	G	D	-	-	-	-	-	Tape Reel
UT9435HL-AG6-R	UT9435HG-AG6-R	SOT-26	D	D	G	S	D	D	-	-	Tape Reel

UT9435HL-AA3-R		(1)Packing Type	(1) R: Tape Reel, T: Tube
		(2)Package Type	(2) AA3: SOT-223, S08: SOP-8
		(3)Lead Free	AE3: SOT-23, AG6: SOT-26
			(3) G: Halogen Free, L: Lead Free

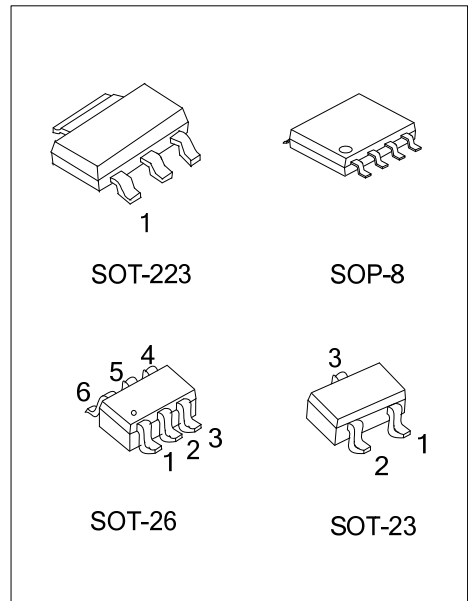

■ PIN CONFIGURATION

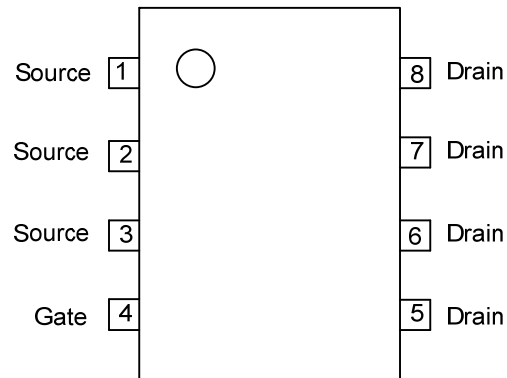

■ ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATING	UNITS
Drain-Source Voltage		V_{DS}	-30	V
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current (Note 3)	$T_A = 125^\circ\text{C}$	I_D	± 5.3	A
Pulsed Drain Current (Note 1, 2)		I_{DM}	± 20	A
Power Dissipation	SOT-223/SOP-8 (Note 4)	P_D	2.5	W
	SOT-23		0.38	
	SOT-26		0.48	
Junction Temperature		T_J	+150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER		SYMBOL	RATING	UNIT
Junction to Ambient	SOT-223/SOP-8 (Note 4)	θ_{JA}	50	$^\circ\text{C/W}$
	SOT-23		325	
	SOT-26		260	

■ ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0\text{ V}, I_D=-250\text{ }\mu\text{A}$	-30			V
Drain-Source Leakage Current	I_{DSS}	$V_{DS}=-24\text{ V}, V_{GS}=0\text{ V}$			-1	μA
Gate-Source Leakage Current	I_{GSS}	$V_{DS}=0\text{ V}, V_{GS}=\pm 20\text{V}$			± 100	nA
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{DS}=V_{GS}, I_D=-250\text{ }\mu\text{A}$	-1		-3	V
Drain-Source On-State Resistance (Note 2)	$R_{DS(ON)}$	$V_{GS}=-10\text{V}, I_D=-5.3\text{A}$		44	50	m Ω
		$V_{GS}=-4.5\text{V}, I_D=-4.2\text{A}$		74	90	m Ω
On State Drain Current	$I_{D(ON)}$	$V_{DS}=-5\text{V}, V_{GS}=-10\text{V}$	-20			A
DYNAMIC PARAMETERS						
Input Capacitance	C_{ISS}	$V_{DS}=-15\text{V}, V_{GS}=0\text{V},$ $f=1.0\text{MHz}$		1040		pF
Output Capacitance	C_{OSS}			420		pF
Reverse Transfer Capacitance	C_{RSS}			150		pF
SWITCHING PARAMETERS						
Turn-ON Delay Time (Note 2)	$t_{D(ON)}$	$V_{DD}=-15\text{V}, I_D=-1\text{A},$ $V_{GEN}=-10\text{V}, R_G=6\Omega$		19	26	ns
Turn-ON Rise Time	t_R			9	13	ns
Turn-OFF Delay Time	$t_{D(OFF)}$			74	105	ns
Turn-OFF Fall Time	t_F			36	50	ns
Total Gate Charge (Note 2)	Q_G	$V_{DS}=-15\text{V}, V_{GS}=-10\text{V},$ $I_D=-4.6\text{A}$		22.5	29	nC
Gate-Source Charge	Q_{GS}			2		nC
Gate-Drain Charge	Q_{GD}			6		nC
DRAIN-SOURCE DIODE CHARACTERISTICS						
Drain-Source Diode Forward Voltage(Note 2)	V_{SD}	$V_{GS}=0\text{V}, I_S=-5.3\text{A}$		-0.84	-1.3	V







Notes: 1. Pulse width limited by $T_{J(MAX)}$

2. Pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$.




3. Surface mounted on 1 in² copper pad of FR4 board

4. When mounted on 1 inch square copper board.

TYPICAL CHARACTERISTICS

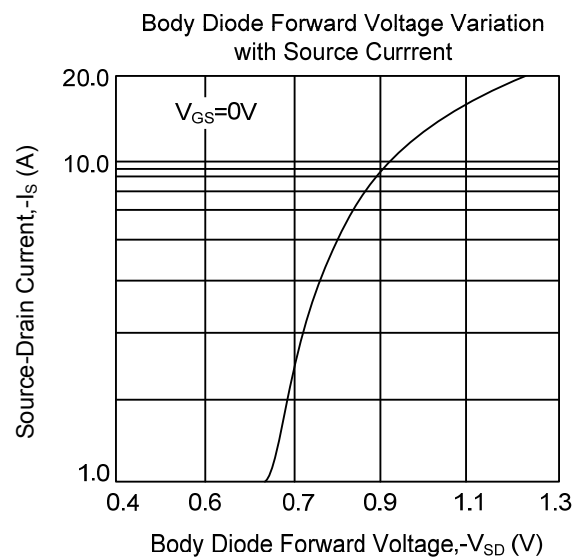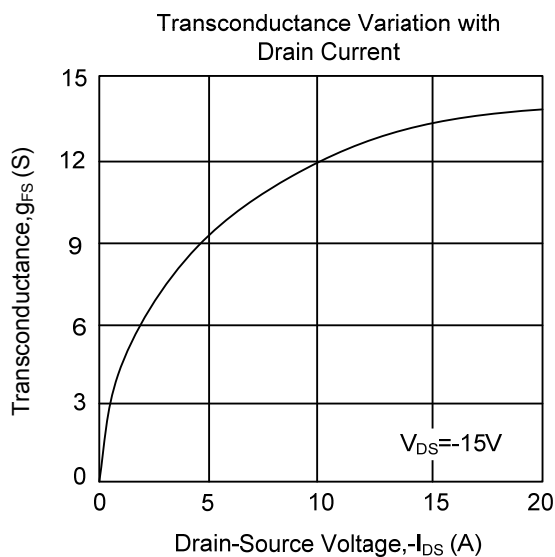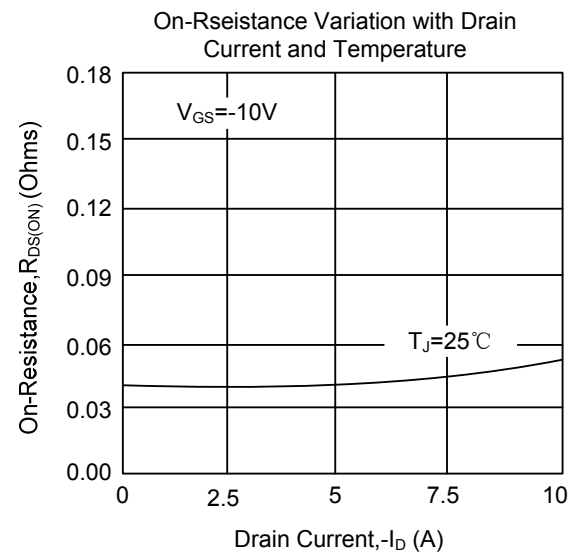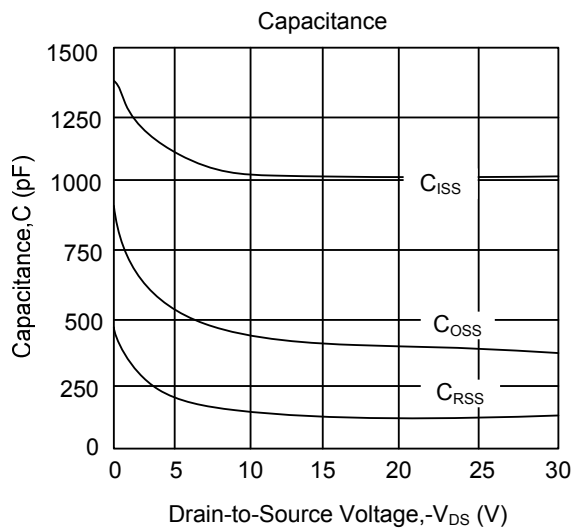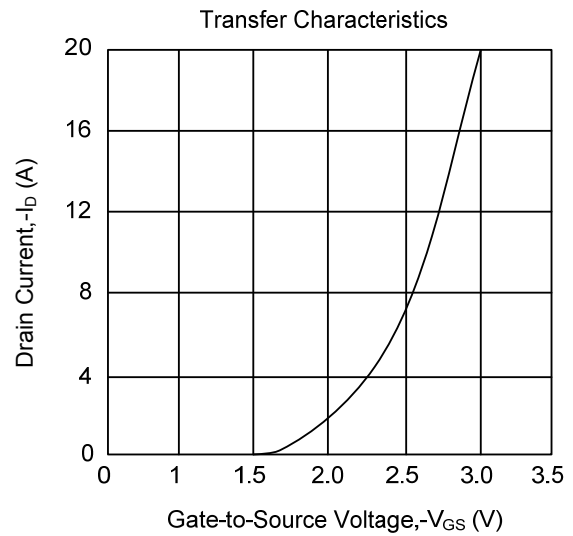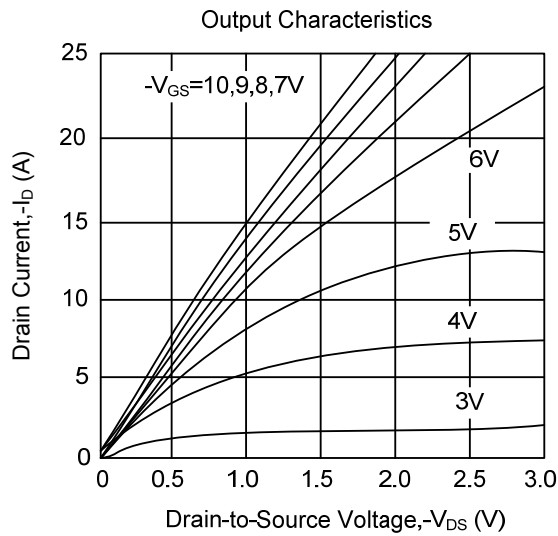

■ TYPICAL CHARACTERISTICS(Cont.)

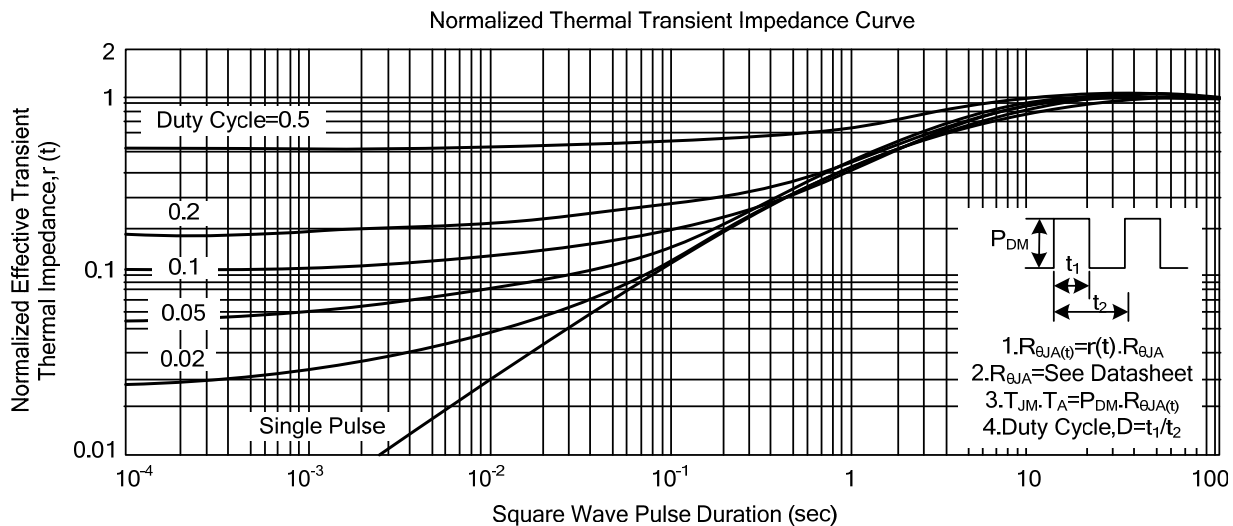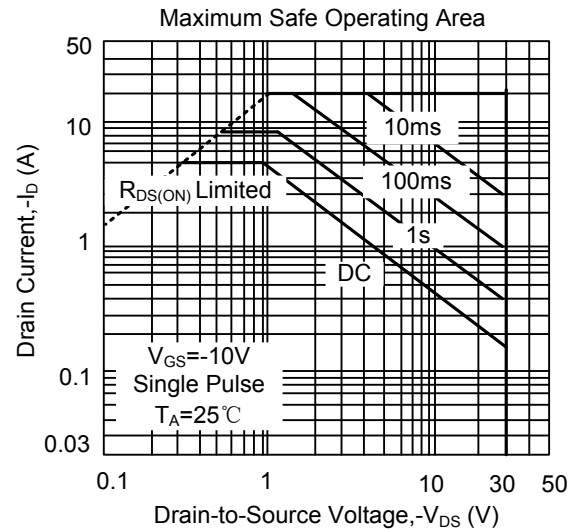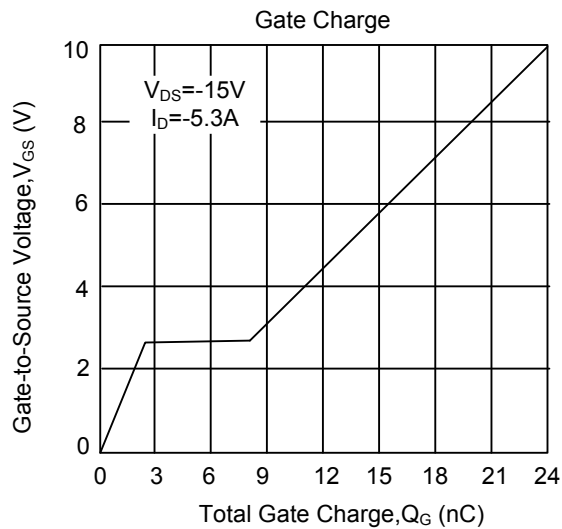

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.