



P.C.B Hole Layout

Specifications



Current Rating	:4A AC,DC
Voltage rating	:250V AC, DC
Temperature range	: -25°C ~ +85°C
Contact resistance	:10m Ω Max
Insulation resistance	:1000M Ω Min
Withstanding voltage	:1000 V AC/minute
Pin Material	:Brass
Finished	:Tin-plated
Housing Material	:Nylon-66, UL94 V-2
Color	:Beige

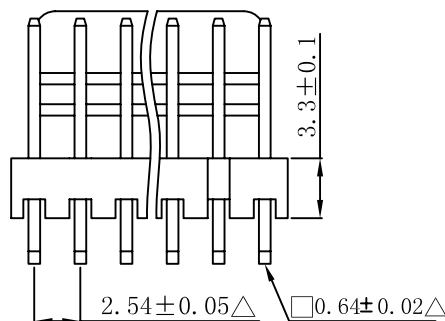

8PIN(含8PIN) 以下



9PIN(含9PIN) 以上

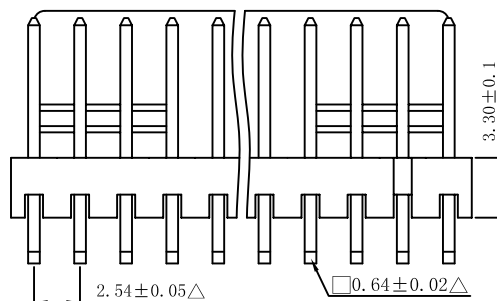

Circuits	Part No.	Dimension mm	
		A	B
02	CD-W254R-02	2.54	5.08
03	CD-W254R-03	5.08	7.62
04	CD-W254R-04	7.62	10.16
05	CD-W254R-05	10.16	12.70
06	CD-W254R-06	12.70	15.24
07	CD-W254R-07	15.24	17.78
08	CD-W254R-08	17.78	20.32
09	CD-W254R-09	20.32	22.86
10	CD-W254R-10	22.86	25.40
11	CD-W254R-11	25.40	27.94
12	CD-W254R-12	27.94	30.48
13	CD-W254R-13	30.48	33.02
14	CD-W254R-14	33.02	35.56
15	CD-W254R-15	35.56	38.10
16	CD-W254R-16	38.10	40.64
17	CD-W254R-17	40.64	43.18
18	CD-W254R-18	43.18	45.72
19	CD-W254R-19	45.72	48.26
20	CD-W254R-20	48.26	50.80

FLYING
INTERNATIONAL

DESCRIPTION(內容):

MX 2.54mm Wafer 90° □=0.64
塑膠顏色為米黃色 (環保材料)

PART NO:
(料 號) **CD-W254R-XX**

DWG NO(圖號):

DRAWN(製圖):
王建平

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

.X .XXX
.XX .X°
.XXX .XX°

SCALE(比例):
1:XX



REV:
A/8

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

1

2

3

4

DESCRIPTION

△此符號表示重點管控尺寸

增加產品顏色標注

(1B.3C)塑膠高度和寬度尺寸公差增大0.05

塑膠增加做到20PIN

DATE

2007.03.10

2007.06.28

2007.08.17

2012.02.15