
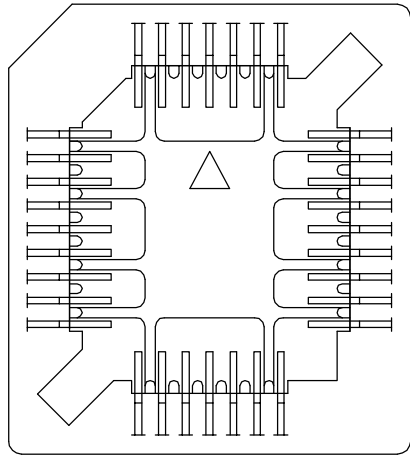
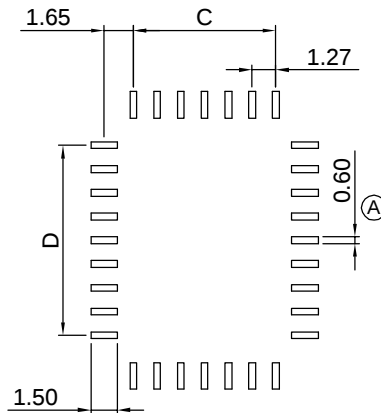


MATERIAL:

- * Contact material: Phosphor bronze JIS 5210.
- * Contact plating: 150u"Tin over 40u"Nickel.
- * Insulator: Hi-temp PPS,UL 94V-0,240°C.

SPECIFICATIONS:

- * Temperature range -50°C to 105°C.
- * Current rating: 1 AMP.
- * Capacitance: 1.0 Picoforads (Max).
- * Contact resistance: 30 Milliohms (Max).
- * Insulation resistance: 1000 Megohmx (Max).
- * Withstanding voltage: AC 600 Vrms.

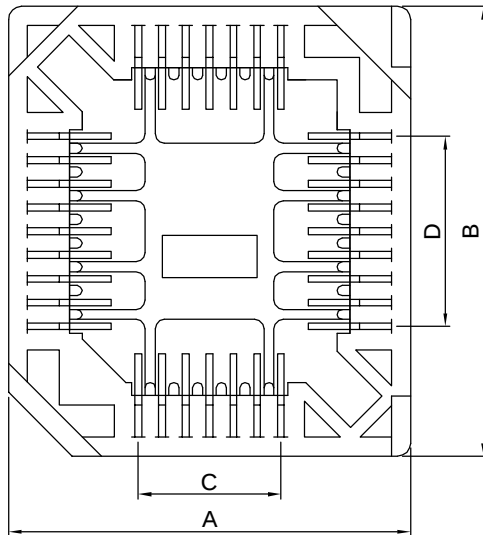

P.C.B LAYOUT

NO.OF CONTACTS	A	B	C	D
CPLC0020S	15.68	15.68	5.08	5.08
CPLC0028S	18.22	18.22	7.62	7.62
CPLC0032S	18.22	20.76	7.62	10.16
CPLC0044S	23.30	23.30	12.70	12.70
CPLC0052S	25.84	25.84	15.24	15.24
CPLC0068S	30.92	30.92	20.32	20.32
CPLC0084S	36.00	36.00	25.40	25.40

所有材料為
"環保材料"

2006.7.06

RoHS

FLYiNG
INTERNATIONAL

DESCRIPTION (內容):

1.27mm Center Surface Mount Chip Carrier
Socket SMD

PART NO:
(料 號)

CPLC00XXS

DWG NO(圖號):

SPC83004

DRAWN(製圖):

KAY

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE :

XXX. ±0.20 .XX ±0.15
XX. ±0.15 .XXX ±0.10
X. ±0.10 ANG. ±0.5°
.X ±0.20

SCALE(比例):

FREE

REV:

R4

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R1

R2

R3

R4

DESCRIPTION

系列料號改成獨立料號

刪除20, 28Pin相關尺寸

Ⓐ更改尺寸:0.45→0.60

修模,增20,28Pin可量產

DATE

2007.04.18

2007.06.05

2011.01.06

2011.08.11