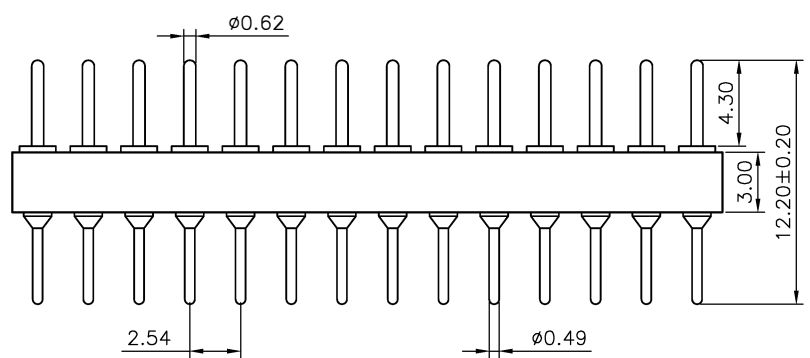
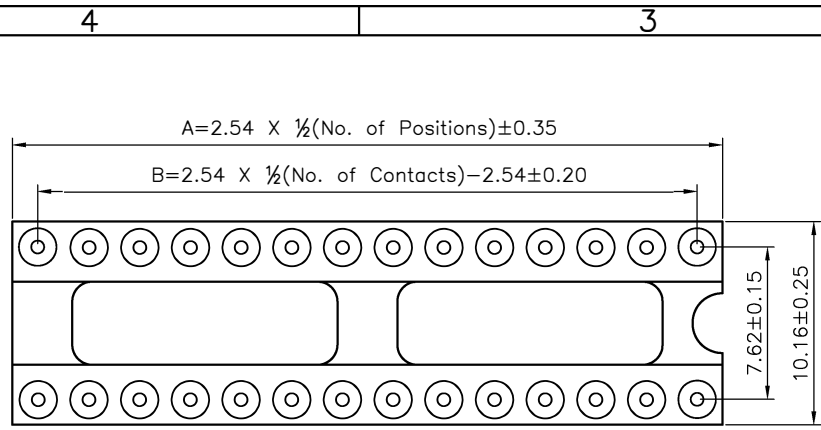


P.C.B LAYOUT

No. of Positions	DIM"A"	DIM"B"	TYPE
6	7.62	5.08	無 積
8	10.16	7.62	
10	12.70	10.16	
14	17.78	15.24	
16	20.32	17.78	
18	22.86	20.32	帶 積
20	25.40	22.86	
24	30.48	27.94	
28	35.56	33.02	
32	40.64	38.10	
40	50.80	48.26	
48	60.96	58.42	

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2010-04-01

Technical Data

Material:
Pin: Brass,machined CuZn38Pb2
Plating:
Tin plated:2μm/80μ"Ni, 5μm/200μ"Sn
Gold Plated:2μm/80μ"nickelfull gold
Insulator black(housing): PBT or PPS (UL94V-0)

Electrical:
Current rating: 3Amps/contact max.
Contact resistance: ≤4mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Operating voltage: 60VAC/DC

Mechanical:
Operating temperatures: Gold Plated:-55° C to+105° C
Tin plated:-40° C to+105° C
Soldering temperature: +220° C,10s max(PBT)
+260° C,10s max(PA6T)

FLYiNG

TOLERANCE

ANGLE ±5°

X.XXX ±0.10

X.XX ±0.20

X.X ±0.30

X. ±0.50

PROJECTON

DATE :

DRAWN :

CHECKED :

APPROVED :

2010-04-01

LiKui

TITLE:
2.54mmPitch IC Sockets Straight
DIP Spacing 7.62mm Pin Length 12.2mm

PART NO:RI-XXP/3-GF/12.2(XX=總PIN數)

DRAWING NO:

REV: A0

UNIT: mm

SCALE: 3:1

SIZE: A4