

1N5817 -- 1N5819

1.0 AMP SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS



FEATURES

- * Low forward voltage drop
- * High current capability
- * High reliability
- * High surge current capability
- * Epitaxial construction

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 0.28 grams
- * Lead Free Finish/RoHS Compliant


VOLTAGE RANGE

20 to 40 Volts

CURRENT

1.0 Ampere

DO-41

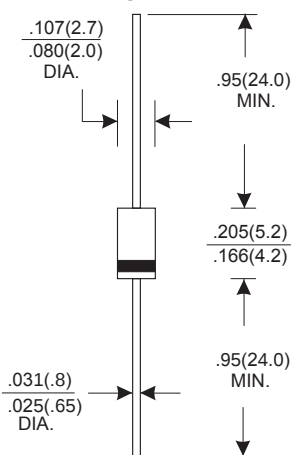

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	1N5817	1N5818	1N5819	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	40	V
Maximum RMS Voltage	14	21	28	V
Maximum DC Blocking Voltage	20	30	40	V
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at Ta=90°C	1.0			A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	25			A
Maximum Instantaneous Forward Voltage at 1.0A	0.45	0.55	0.60	V
Maximum DC Reverse Current Ta=25°C	500			uA
at Rated DC Blocking Voltage Ta=100°C	10			mA
Typical Junction Capacitance (Note1)	110			pF
Typical Thermal Resistance RθJA (Note 2)	80			°C/W
Operating Temperature Range Tj	-65 — +125			°C
Storage Temperature Range Tstg	-65 — +150			°C

NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Ambient Vertical PC Board Mounting 0.5"(12.7mm) Lead Length.

RATING AND CHARACTERISTIC CURVES (1N5817 THRU 1N5819)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

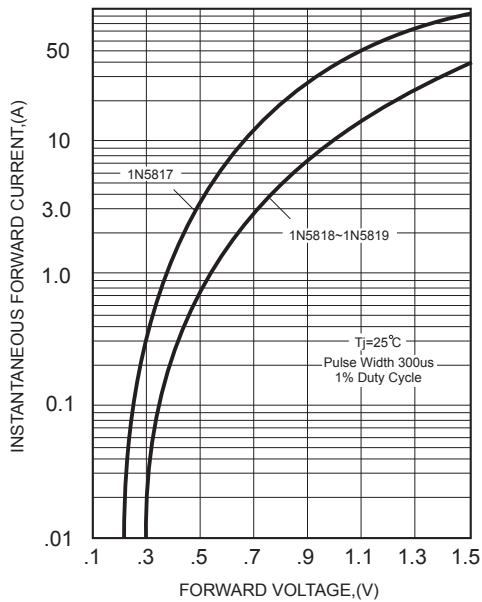


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

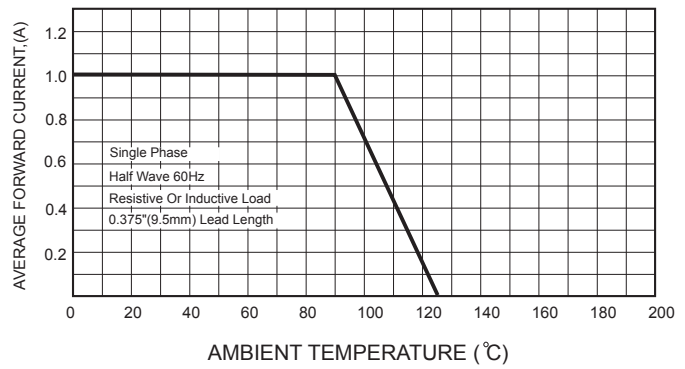


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

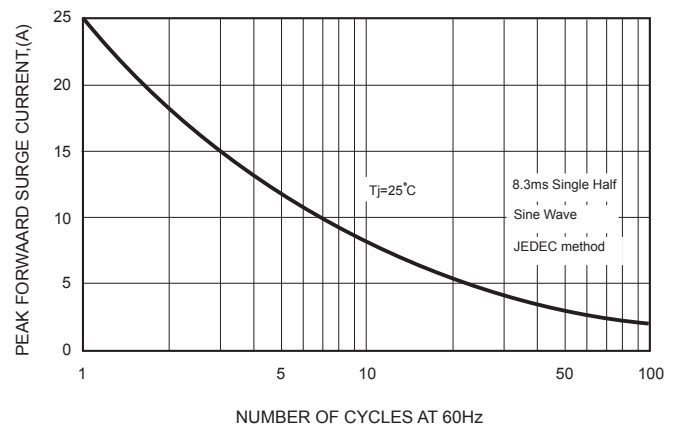


FIG.3 - TYPICAL REVERSE CHARACTERISTICS



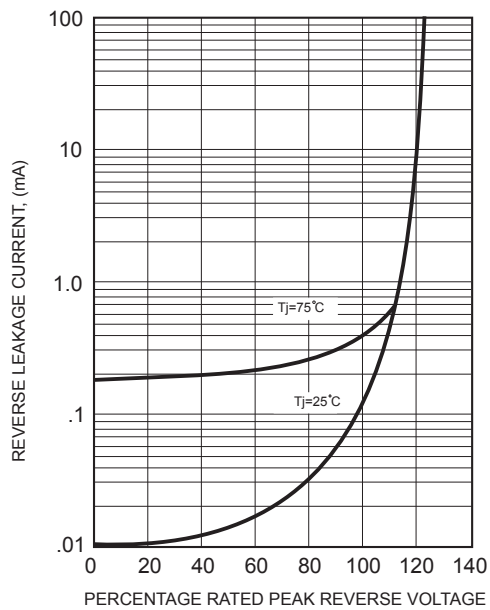


FIG.5-TYPICAL JUNCTION CAPACITANCE

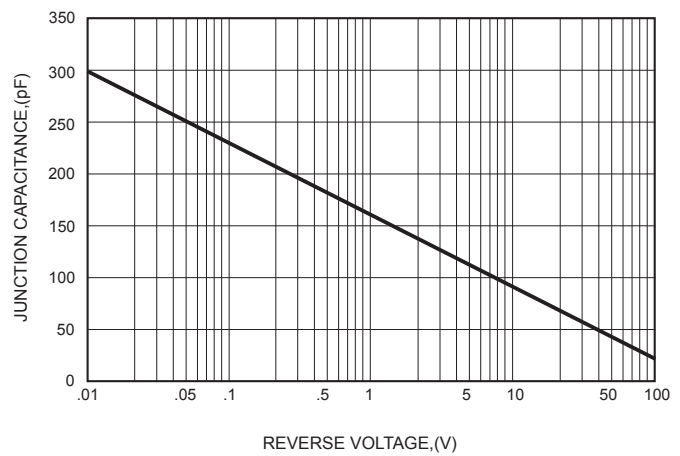

“E” 字型切腳

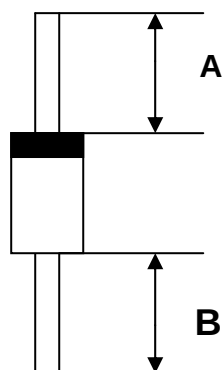

附圖尺寸

圖號	Q310
A	10.0 ± 0.5MM
B	18.0 ± 0.5MM

UNLESS OTHERWISE SPECIFIED LIMITS ARE : ANGULAR ±0°30' .0 ±.10 .00 ±.05 .000 ±.01			TITLE: Q310				
			MAT'L:	QTY: 1	FINISH: 2017/7/7		
			UNIT: mm	SCALE:	SH'T: 1 OF 1		
DRAWN	CHECKED	APPROVED	DWG. NO.: DIODE-EG01			A4	REV: B
韋小梅		劉偉	 東莞松鉅電子有限公司				