

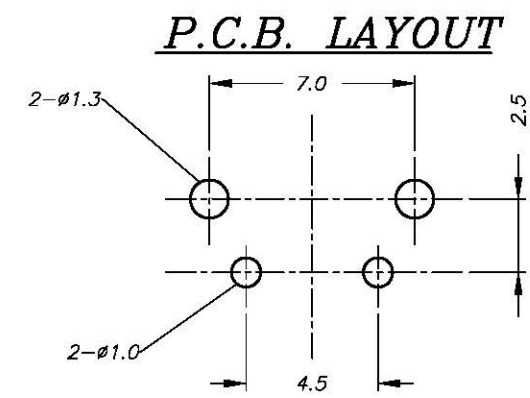
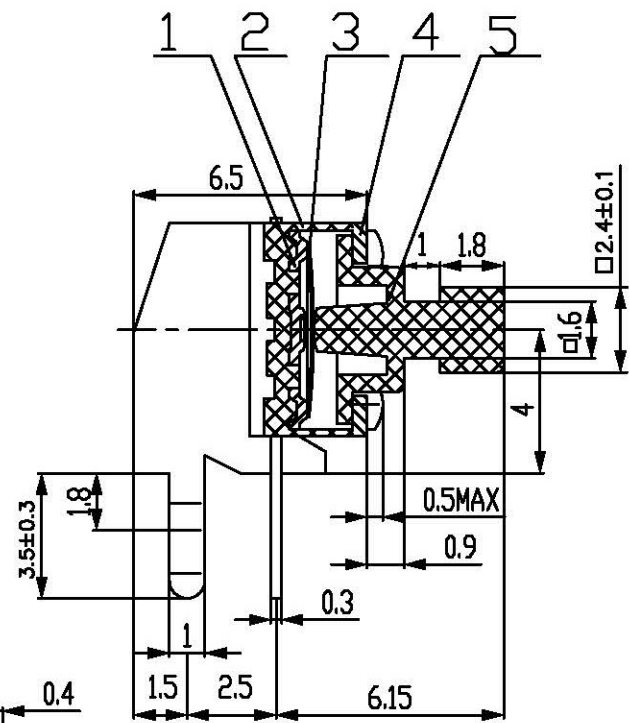


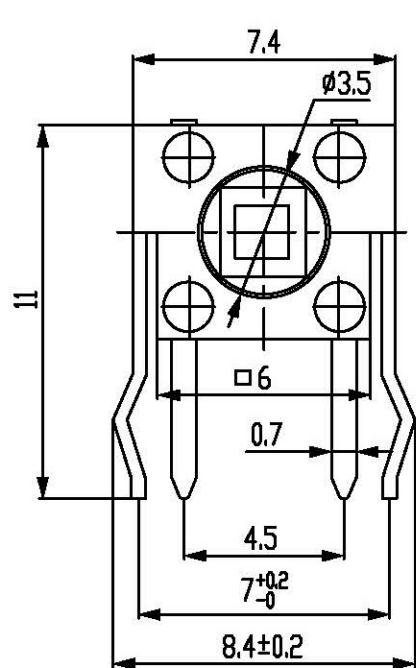

- SPECIFICATIONS:**
- 1.RATING:DC12V 50mA Max
 - 2.TRAVEL:0.25±0.1mm
 - 3.CONTACT RESISTANCE:100mΩ (Max)
 - 4.LIFE CYCLES:130gf 100,000 cycle
160gf 80,000 cycle
250gf 60,000 cycle
 - 5.GENERAL TOLERANCE:±0.2mm

CIRCUIT DIAGRAM

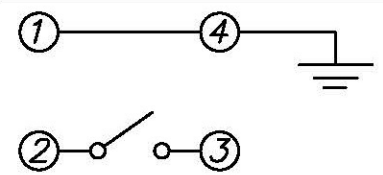

TYPE	1	2	3
OPERATING FORCE	130±30gf	160±30gf	250±30gf

No	NAME	MATERIAL	NATIONALITY	QTY	FINISHING
1	Terminal	Brass	China	1	Silver plating
2	Case	PA66	China	1	Black
3	Contact	Phosphor bronze	Korea	1	Contact side silver plating
4	Cover	SPCC-SD	China	1	CuSn plating
5	Stem	PA66	China	1	Black

FLYiNG

單位 mm	比例 FREE	日期 2016-07-12	核准 WILLIAM	審核 AMY	設計繪圖 EWS	料號 品名 圖號	FLY-1102VT-(OF)-B-K TACT SWITCH	頁數 版本	1/1 B
----------	------------	------------------	---------------	-----------	-------------	----------------	------------------------------------	----------	----------