
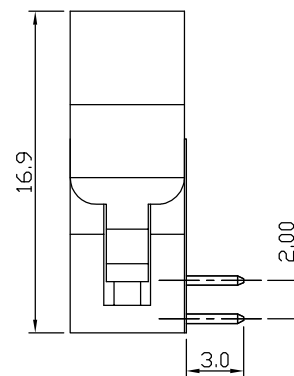
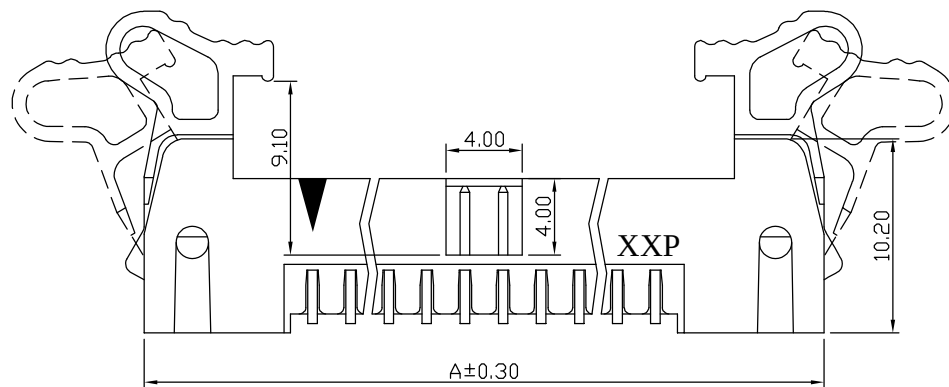


PCB Layout (Top View)

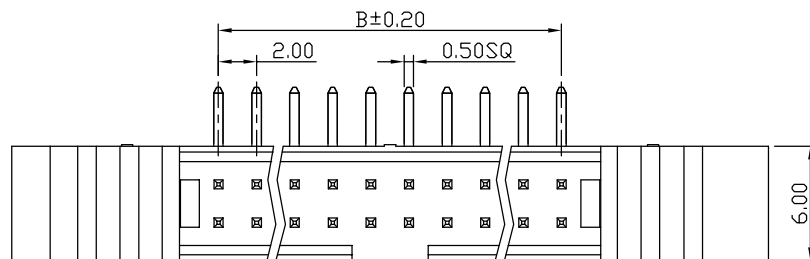

MATERIAL AND FINISH

Housing: Nylon-6T (UL94V-0), Black.
Terminal: Brass, Gold Plating.

ELECTRICAL CHARACTERISTICS

Current Rating: 1.0 Amp. Max..
Dielectric Withstand Voltage:
800V AC RMS for 60Seconds.
Insulation Resistance:
1000M Ohms Min. at 500V DC.

MECHANICAL CHARACTERISTICS

Operating Temperature: -55°C ~ +105°C.

所有材料為
"環保材料"

2006.7.04

RoHS

PART NO.	Dimensions	
	A	B
CHE200R010	25.70	8.00
CHE200R012	27.70	10.00
CHE200R014	29.70	12.00
CHE200R016	31.70	14.00
CHE200R020	35.70	18.00
CHE200R022	37.70	20.00
CHE200R024	39.70	22.00
CHE200R026	41.70	24.00
CHE200R030	45.70	28.00
CHE200R034	49.70	32.00
CHE200R040	55.70	38.00
CHE200R044	59.70	42.00
CHE200R050	65.70	48.00

FLYiNG
INTERNATIONAL

DESCRIPTION(內容):

2.00mm Box Header
Ejector Type PCB Mount Right Angle
with Short Latch

PART NO: CHE200R0XX
(料 號)

DWG NO(圖號): HD22190426

DRAWN(製圖):

KAY

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE: (公差)

.X ±0.3
.XX ±0.2
.XXX ±0.1

SCALE(比例):

FREE



REV:

R3

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE
變更環保章字樣
變更塑料: NY9T→PPS
變更塑料: NY9T→PPS & Dim A尺寸
NEW RELEASE
60.64.68Pin 停產
變更塑料: NY9T→NY6T, 圖面更新, 變更圖號

DATE

2006.07.04
2006.08.11
2006.09.29
2007.05.15
2009.07.17
2011.03.28
2013.05.14